

BOARD OF COMMISSIONERS
SARPY COUNTY, NEBRASKA
RESOLUTION AWARDING BID FOR TWO (2) 2015 64,000 GVWR TANDEM AXLE CAB CHASSIS
FOR THE PUBLIC WORKS DEPARTMENT

WHEREAS, pursuant to Neb. Rev. Stat. §23-104(6)(Reissue 2012), the County has the power to do all acts in relation to the concerns of the County necessary to the exercise of its corporate powers; and,

WHEREAS, pursuant to Neb. Rev. Stat. §23-103 (Reissue 2012), the powers of the County as a body are exercised by the County Board; and,

WHEREAS, bids for the tandem axle cab chassis have been solicited, made, opened and reviewed pursuant to applicable Nebraska State Statutes; and,

WHEREAS, based on those proceedings, and after a public hearing, this Board has duly deliberated and considered the bids received; and,

WHEREAS, this Board desires to proceed forthwith in order to expedite and facilitate service to the citizens of Sarpy County.


NOW, THEREFORE, BE IT RESOLVED BY THIS BOARD OF COUNTY COMMISSIONERS THAT:

- (1) Based upon the recommendation of the Purchasing Department, and upon a comparison of the bids to the bid specifications, the bid is hereby awarded to the low bidder Omaha Truck Center for Two (2) 2015 64,000 GVWR Tandem Axle Cab Chassis in the amount of Two Hundred Thirteen Thousand One Hundred Seventy Four Dollars and No Cents (\$213,174.00) is accepted, ratified, and confirmed.
- (2) This Board's Chairman, Clerk, and Attorney are hereby authorized and directed to execute such ancillary documents as may be required to evidence the contract and take any and all steps necessary or required in order to carry out the terms of such contract after said documents have been reviewed by the Attorney, Fiscal Administrator, and County Administrator.

The above resolution was approved by a vote of the Sarpy County Board of Commissioners at a public meeting duly held in accordance with applicable law on the 8th day of April, 2014.


 Sarpy County Board Chairman

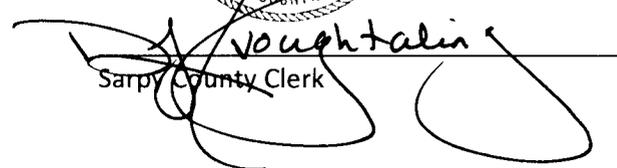


 Sarpy County Clerk

SEAL

Sarpy County Purchasing Department

SARPY COUNTY COURTHOUSE
1210 GOLDEN GATE DRIVE SUITE 1220
PAPILLION, NE 68046



Brian Hanson, Purchasing Agent
(402) 593-2349
Debby Peoples, Asst. Purchasing Agent
(402) 593-4164
Beth Garber, Senior Buyer/Contract Administrator
(402) 593-4476
Lois Spethman, Supply Clerk/Purchaser
(402) 593-2102

MEMO

To: Sarpy County Board of Commissioners

From: Beth Garber

Re: Award Bid for Tandem Axle Cab Chassis

On March 27, 2014 five (5) bids were opened for Two (2) 2014 64,000 GVWR Tandem Axle Cab Chassis for the Public Works Department. After reviewing the bids it is recommended the bid be awarded to the low bidder, Omaha Truck Center for \$213,174.00 for two (2) 2015 Freightliner 114SD chassis'. The County has previously owned Freighliners and has been satisfied with their performance.

Omaha Truck Center has been in business for almost 40 years and has over 450 employees. We are confident in their ability to deliver the trucks as specified. Please feel free to contact me with any questions.

April 2, 2014

Beth Garber

cc: Deb Houghtaling
Mark Wayne
Scott Bovick
Brian Hanson
Rich Weber
George Funderburk

Beth Garber

From: Rich Weber
Sent: Wednesday, April 02, 2014 10:40 AM
To: Beth Garber
Cc: Denny Wilson; Dannielle McKulsky; George Funderburk; Rod Ripley
Subject: Tandem Truck Bid

Beth;

George, Rod and I have reviewed the bids for the Two Tandem Axle Cab Chassis that were received on March 27, 2014. There were five bids and all of the bids met our specifications with some minor exceptions that were acceptable to us. I would like to recommend that the Public Works Department accept the low bid from Omaha Truck Center for Two Freightliner Model 114SD SFA truck chassis for the extended price of \$213,174.00. We currently have two of these model trucks in our fleet and have been satisfied with them. The two trucks will be replacing two trucks currently in our fleet Unit 202 –1996 year Mack and Unit 210—2000 year International.


If you have any questions please give me a call.

*Rich Weber
Street Operations Manager
Sarpy County Public Works
15100 so 84th st
Papillion Ne, 68046-4627
Office 402-537-6912
Cell 402-415-3612*

Two (2) - 2014 - 64,000 GVWR Tandem Axle Cab Chassis
for the Public Works Department
Bid Tabulation

Open Date:
Thursday March 27, 2014
at 2:00 p.m.

VENDOR NAME	Omaha Truck Center	Volvo Trucks of Omaha	Wise-Mack, Inc.	Cornhusker International Trucks	Wick's Trucks
Make	Freightliner	Volvo	Mack	International	Western Star
Model	114SD SFA	VHD	GU713 Granite	7600 SFA 6x4	4900SF 6x4
Delivery Date	June 25, 2014	July 20, 2014	3 days after arrival	75-90 days	3-5 days after receipt
Build Out Date	June 15, 2014	July 10, 2014	Late June		90-120 days after receipt
Chassis Unit Price	\$106,587.00	\$112,490.00	\$109,570.00	\$113,500.00	\$111,765.00
Chassis Extended Price	\$213,174.00	\$224,980.00	\$219,140.00	\$227,000.00	\$223,530.00




FREIGHTLINER GMC

P.O. BOX 27379

OMAHA, NE 68127-0379


OMAHA TRUCK CENTER, INC.

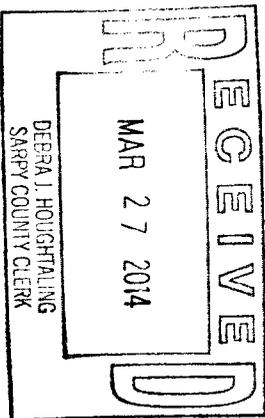

1:24pm
gsm

Deb Houghtaling
Sarpy County Clerks' Dr
1218 Golden Gate Dr S
Papillion, NE. 68044

"Sealed Bid"

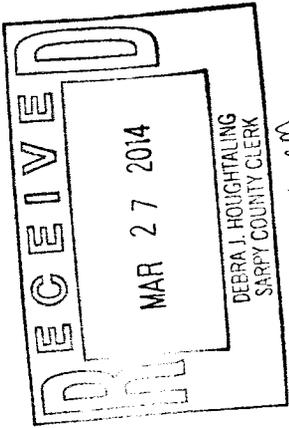

DEB Houghtaling
Serp County Clerks Off
1210 Golden Gate Dr. Su
Papillion, NE. 68046

"Sealed Bid"
(2) 64,000 GVW T.A.C.C. Trucks

SARPY COUNTY, NEBRASKA

REQUEST FOR PROPOSALS

Two (2) 64,000 GVWR Tandem Axle Cab Chassis Trucks For the Public Works Department

**PROPOSALS DUE:
2:00 p.m., Thursday, March 27, 2014**

General Information

Notice to Vendors

Sarpy County is seeking proposals for Two (2) 64,000 GVWR Tandem Axle Cab Chassis Trucks for the Public Works Department. The successful Vendor will enter into a Contract that incorporates both the RFP along with the submitted proposal.

Sealed bids will be received Monday through Friday 8:00 a.m. to 4:45 p.m. except holidays, until 2:00 p.m., Thursday, March 27, 2014. Bids shall be in a sealed envelope, clearly marked "Sealed Bid – Two (2) 64,000 GVWR Tandem Axle Cab Chassis Trucks" and shall have the name of the Vendor, and the time and date of the bid opening. **Do not fax bids, only sealed bids will be accepted.**

Requests for information and clarification questions must be received by 12:00 p.m., March 21, 2014 at 12:00 P.M. in order for Sarpy County to have time to issue an addendum.

Bidding criteria must be received from Beth Garber, Purchaser, 1210 Golden Gate Drive Suite 1220, Papillion, NE 68046, (402) 593-4476, bgarber@sarpy.com or via the internet at www.sarpy.com.

Vendors that obtain specifications from the internet sites are responsible for obtaining any addenda that may be added at a later time.

Bids must be sent to:

Deb Houghtaling
Sarpy County Clerk's Office
1210 Golden Gate Drive Suite 1250
Papillion, NE 68046

Bids not addressed and delivered to the above person will not be considered. Bids received after the above stated time and date will not be considered.

Bid opening will be a public opening to be held in the Sarpy County Administrative Conference Room at 1210 Golden Gate Drive, Papillion, NE. The bid opening will be at 2:00 p.m., Thursday, March 27, 2014.

All bids submitted shall be valid for a period of ninety (90) days following the final date for submission of bids.

Sarpy County will not be liable for costs incurred by Vendors for proposal preparation, printing,

demonstration, or any other costs associated with or incurred in reliance on proposal creation. All such costs shall be the responsibility of the Vendor.

The bids shall include all charges and applicable taxes, F.O.B. Destination, freight prepaid, Sarpy County, Nebraska. The Vendor need not include sales tax in the bid. Sarpy County will, upon request, furnish the successful Vendor with a completed State of Nebraska Tax Exempt Form 13 upon acceptance of the successful Vendor's proposal.

The Sarpy County Board of Commissioners reserves the right to reject any or all bids and to waive minor informalities.

In the event of conflict between unit price and extended price, unit price shall prevail.

Procedures for Evaluation and Awarding of Bid

Evaluation will be done by Beth Garber, Sarpy County Purchaser along with personnel from the Public Works Department. After evaluation the Purchaser will make a recommendation to the County Board of Commissioners for award. This recommendation and pending award will be made at a public meeting of the Board of Commissioners. Agendas are available each Friday afternoon on our internet site www.sarpy.com. The Commissioners award the bid by majority vote.

The following factors will be used to consider the award of the bid, where applicable:

- a) Compliance with all requirements.
- b) Price.
- c) The ability, capability, and skills of the Vendor to perform.
- d) The character, integrity, reputation, judgment, experience, and efficiency of the Vendor.
- e) The quality of previous performance.
- f) Whether the Vendor can perform within the time specified.
- g) The previous and existing compliance of the supplier with laws.
- h) The life-cost of the personal property or services in relation to the purchase price and specified use.
- i) The performance of the personal property or service taking into consideration any commonly accepted tests and standards of product, service, usability and user requirements.
- j) The energy efficiency ratio as stated by the supplier.
- k) The life-cycle costs between alternatives for all classes of equipment, the evidence of expected life, the repair and maintenance costs, and the energy consumption on a per year basis.
- l) Such other information as may be secured having a bearing on the decision.

Terms and Conditions

1. Information, Discussion, and Disclosures

Any information provided by Sarpy County to any Vendor prior to the release of this Request for Proposal ("RFP"), verbally or in writing, is considered preliminary and is not binding on Sarpy County.

The Vendor must not make available nor discuss any cost information contained in the sealed copy of the proposal to or with any employee of Sarpy County from the date of issuance of this RFP until the contract award has been announced, unless allowed by the Sarpy County Purchasing Department in writing for the purpose of clarification or evaluation.

No interpretation of the meaning of the specifications, or other bidding documents, or correction of any ambiguity, inconsistency, or error therein will be made orally to any Vendor.

Every request for such interpretation or correction should be in writing, addressed to the Sarpy County Purchaser, Beth Garber, 1210 Golden Gate Drive Suite 1220, Papillion, NE 68046 or bgarber@sarpy.com. **Requests must be received by 12:00 p.m., March 21, 2014 in order for Sarpy County to have time to issue an addendum. Requests received after deadline may not be considered.** In case Sarpy County finds it expedient to supplement, modify, or interpret any portion of the bidding documents prior to the proposed bid date, such procedure will be accomplished by the issuance of written addenda to the RFP which will be mailed or delivered to all prospective Vendors at the respective addresses furnished for such purpose.

2. Addenda

All addenda will become part of this RFP and must be responded to by each Vendor.

All addenda must be acknowledged in writing in the bid submitted by the Vendor.

This RFP, any subsequent addenda, and any written responses to questions take precedence over any information previously provided.

3. Confidentiality of Documents

Sarpy County considers all information, documentation and other materials requested to be submitted in response to this proposal to be of a non-confidential and/or

non-proprietary nature and therefore shall be subject to public disclosure under Neb. Rev. Stat. § 84-712.05(3).

Vendors are hereby notified that Sarpy County strictly adheres to all statutes, court decisions, and opinions of the Nebraska Attorney General with respect to disclosure of RFP information.

Any “proprietary, trade secret, or confidential commercial or financial” information must be clearly identified, in a separate sealed envelope, at the time of bid/proposal submission. **Pricing information is not considered financial information and therefore is not considered Confidential.** Please note: even if Vendor believes pricing information is confidential and includes it in a separate, sealed envelope, such information will be read aloud and entered into record during the public bid opening. For all other appropriately identified proprietary, trade secret, or confidential commercial or financial information, the Vendor will be required to fully defend, in all forums, Sarpy County’s refusal to produce such information; otherwise, Sarpy County will make such information public upon request.

4. Non-Discrimination Clause

Pursuant to Neb. Rev. Stat. §73-102 (Reissue 2009), Vendor declares, promises, and warrants it has and will continue to comply fully with Title VI of the Civil Rights Act of 1964, as amended (42 U.S.C.A. §1985, et seq.), and the Nebraska Fair Employment Practice Act, Neb. Rev. Stat. §48-1101, et seq. (Reissue 2010), in that there shall be no discrimination against any employee who is employed in the performance of this Contract, or against any applicant for such employment, because of age, color, national origin, race, religion, creed, disability or sex.

5. Conflict of Interest Clause

Pursuant to Neb Rev. Stat. §23-3113 (Reissue 2012), the parties hereto declare and affirm that no officer, member, or employee of the County, and no member of its governing body, and no other public official of the County who exercises any functions or responsibilities in the review or approval of the undertaking described in this Contract, or the performing of services pursuant to this Contract, shall participate in any decision relating to this Contract which affects his or her personal interest, or any corporation, partnership, or association in which he or she is directly or indirectly interested; nor shall any employee of the County, nor any member of its governing body, have any interest, direct or indirect, in this Contract or the proceeds thereof.

6. Payment Terms

The successful Vendor shall submit a monthly itemized invoice for payment. Sarpy County will make payment to the successful Vendor within thirty (30) days after receipt of invoice and satisfactory delivery.

7. Supplemental Terms and Conditions/Modifications

Any supplemental terms, conditions, modifications, or waiver of these terms and conditions must be in writing and signed by the Sarpy County Board Chairman and the Vendor.

8. Termination

Either party may terminate the Contract with ninety (90) days' written notice to the other.

9. Residency Verification

The Vendor agrees to comply with the residency verification requirements of Neb. Rev. Stat. §4-108 through §4-114. The Vendor is required and hereby agrees to use a federal immigration verification system to determine the work eligibility status of new employees physically performing services within the State of Nebraska. A federal immigration verification system means the electronic verification of the work authorization program authorized by the Illegal Immigration Reform and Immigrant Responsibility Act of 1996, 8 U.S.C. 1324a, known as the E-Verify Program, or an equivalent federal program designated by the United States Department of Homeland Security or other federal agency authorized to verify the work eligibility status of a newly hired employee.

If the Vendor is an individual or sole proprietorship, the following applies:

The Vendor must complete the United States Citizenship Attestation Form, available on the Department of Administrative Services website at www.das.state.ne.us.

- a) If the Vendor indicates on such attestation form that he or she is a qualified alien, the Vendor agrees to provide the U.S. Citizenship and Immigration Services documentation required to verify the Vendor's lawful presence in the United States using the Systematic Alien Verification for Entitlements (SAVE) Program.

- b) The Vendor understands and agrees that lawful presence in the United States is required and the Vendor may be disqualified or the contract terminated if such lawful presence cannot be verified as required by Neb. Rev. Stat. Sect. 4-108.

10. Breach

Should Vendor breach, violate, or abrogate any term, condition, clause or provision of this agreement, the County shall notify Vendor in writing that such an action has occurred. If satisfactory provision does not occur within ten (10) days from such written notice the County may, at its option, terminate this agreement and obtain an alternate provider to provide all required materials. This provision shall not preclude the pursuit of other remedies for breach of contract as allowed by law.

11. Assignment

The Vendor may not assign this Contract without the prior written consent of the County.

12. Subcontracting

Vendor may not subcontract the work to be performed, without prior written consent of the County. If such consent is granted, Vendor will retain responsibility for all work associated with the Contract. The Vendor must identify any subcontractors it intends to use in the execution of this Contract. The Vendor must identify subcontractors in writing within the proposal.

13. Independent Contractor

The Vendor shall in the performance of the Contract at all times be an independent contractor and not an employee or agent of the County. The Vendor, its officers, employees and agents shall at no time represent the Vendor to be other than an independent contractor or represent themselves to be other than employees of the Vendor.

14. Indemnity

The Vendor shall indemnify and save harmless Sarpy County, its officers, employees and agents from all loss, claims, suits or actions of every kind and character made upon or brought against Sarpy County, its officers, employees, or agents, for or sustained by any party or parties as a result of any act, error, omission or negligence of said Vendor or its servants, agents, and subcontractors; and also from all claims of damage in fulfilling this

Contract.

15. Deviations

Once the bid has been accepted by Sarpy County, no deviations from the specifications will be accepted without prior written approval of Sarpy County.

16. Exceptions

These specifications are minimum acceptable specifications. You may bid other than what is specified if it is of higher specification than what is requested. Vendor must list any exceptions to the bid specifications on the bid form.

17. Literature

Vendor shall attach three (3) sets of detailed specifications or advertising literature of systems to the bid form. Any information necessary to show compliance with these requirements not given on the attached advertised data sheets shall be supplied in writing and attached to the bid proposal. Lack of sufficient information supplied with a proposal is cause for automatic rejection of such bid.

18. Warranty

A copy of all manufacturers' warranties shall be included in Vendor's proposal.

The Vendor shall warrant all materials, workmanship and equipment against defects for a period of one year beginning on the date of substantial completion except that certain equipment shall be warranted for longer periods as described in manufacturer's warranties.

19. Company Information

Vendor will provide the following company information on the bid form:

- a. Years in business;
- b. Number of employees; and,
- c. Total sales for last three (3) years.

20. References

Each Vendor must include with its proposal a list of no less than three (3) current

references that have purchased the specified product or service within the last two (2) years. The list must include the name of the company along with the name, phone number, and email of a contact person for each company.

Specifications:

1. The truck complete with enclosed cab furnished under this specification shall be the latest model, standard production unit, offered to the general trade, equal in every respect to the construction and performance characteristic shown in the manufacturer's specifications and descriptive literature for this type of truck as manufactured and advertised for delivery in the continental United States and including all equipment normally offered and installed at the factory. **A stripped truck version is specifically excluded.**
2. Engine bore, main bearing, connection rod, bearing and wrist pins shall not exceed the manufacturer's established size tolerance.
3. All trucks offered must meet or exceed the following minimum specifications. It is intended the manufacturer will build the truck to these specifications and the selling or servicing dealer will be required only to perform the normal pre-delivery service and not be required to modify, alter, exchange, assemble, install or paint various components to meet these specifications.
4. Truck shall be guaranteed to include all the latest engineering developments adopted by the company applying to transmission, fuel system, engine and accessories and to possess the capability of operation on diesel fuel.
5. All trucks shall comply with all current provisions of the National Traffic and Motor Vehicle Safety Act, and applicable provisions of the USEPA Emission Standards.
6. Factory Installations: If a manufacturer has requirements available from the factory, then item must be **FACTORY INSTALLED**; if factory installation is not available, then it must be noted as a dealer installation and an exception.
7. If a manufacturer has a standard item that exceeds the following minimum requirements, the standard item must be furnished.
8. List all exceptions/clarifications/comments on the page provided. Indicate acceptance or exception by marking YES/NO for specification listed. Any unmarked YES/NO line will be noted as exception to the specification.

1 copy

- 9. Vendor to provide with the bid, the build out dates or tentative build out dates, if they are available. Also, provide delivery date to Sarpy County.
- 10. Provide with the bid two (2) sets of all current descriptive literature and manufacturer's specifications for this type of truck as manufactured.

I. CHASSIS:

1. Truck size and chassis capacities

- A) Dimensions
 - 1. Wheel base two hundred twelve inches (212")
 - 2. Cab to rear suspension (CA) one hundred twenty five inches (125")
 - 3. Rear suspension to rear frame seventy eight inches (78")
 - 4. B.B.C. one hundred sixteen point five inches (116.5")
- B) Frame (Off Highway Use)
 - 1. Heat treated alloy steel (120,000 P.S.I. yield)
 - 2. Full C channel Single Frame with partial frame reinforcement at front suspension
 - 3. Front Integral frame extension twenty inches (20") for snow plow operation. Bolt on frame section is not acceptable
 - 4. RBM minimum three million two hundred four thousand (3,204,000) inch lbs per rail
 - 5. Section modulus minimum twenty six point seven inches (26.7")
 - 6. Two (2) tow hooks, front frame mounted
 - 7. Two (2) tow Hooks, rear frame mounted

YES/NO

C) Gross Vehicle Weight

1. Sixty-four thousand (64,000) lbs. minimum

2. **Axles and Suspensions**

A) Front Axle

1. Eighteen thousand (18,000) lbs. minimum (heat treated forged I beam type)
2. Hub piloted, oil lubricated bearing and seals with magnetic plugs
3. 50 Degree turning angle minimum

State axle model and brand

18,000 lbs. DETROIT DA-F-18.0-5

B) Front Suspension

1. Eighteen thousand (18,000) lbs. minimum capacity
2. Multi-leaf shackle type with grease fittings
3. Spring pins with lubrication groove
4. Front shock absorbers
5. Set forward front axle mounting

State type and capacity suspension specified

18,000 lbs FLOT LEAF

C) Rear Axle

1. Forty six thousand (46,000) lbs. minimum
2. Single reduction with lube oil pump
3. Magnetic filler and drain plugs

YES/NO

✓/__

4. Adequate gear ratio for road speed of seventy five (75) m.p.h.

✓/__

5. Eighteen inch (18") ring gear and two hundred (200) wheel ends

✓/__

6. Power divider lockout with warning light buzzer and cab manual air valve

State model and axle brand

RT-46-160P R-SERIES MERITOR Rear Axle

D) Rear Suspension

✓/__

1. Rear suspension shall be heavy duty air suspension type with minimum Forty-six thousand (46,000) lbs. rated capacity

✓/__

2. Hendrickson PRIMAAX EX heavy duty on/off road suspension (rubber pad spring suspension will not be accepted)

✓/__

3. Manual dump valve for rear suspension with indicator light mounted in dash

State type and capacity specified

AIR LIAZER 46,000 lbs SUSPENSION w/CHAIN CLEARANCE

E) Steering Gear

✓/__

1. Sheppard dual power steering or approved equal

✓/__

2. Eighteen inch (18") diameter steering wheel, two (2) spoke black

✓/__

3. Steering wheel tilt/telescoping type

State type of steering gear specified

TRW-TAP-60 P STEERING RCH AS AUXILIARY COAT.

F) All Wheel Alignment

✓/__

1. All wheel alignment per manufacturer specification

YES/NO

2. Provide manufacturer specifications and document of complete alignment

3. Brakes

A) Dual Air System for Straight Truck

1. Full ABS (full vehicle wheel control system) four (4) Channel with traction assist mode
2. Dual air gauges with low air warning lights and alarm
3. Brake lines nylon color - coded type

B) Air Compression, Air Dryer, Tanks

1. The compressor shall be a single or two – stage water cooled type with a minimum capacity of 17.0 CFM
2. Bendix AD-IP Air dryer heated with Spin on desiccant canister or OEM equivalent
3. All air tanks shall be steel
4. All tanks equipped with manual turn drain valves

State type of compressor/ air dryer specified

BWS Model BA-921, 17.0 CFM Single Cyl. w/ Spin on Valve

C) Front Brakes

1. S cam type. Sixteen point five inches by six inches (16.5" x 6")
2. Dust shields
3. Automatic slack adjusters

D) Rear Brakes

1. S cam type sixteen point five inches by seven inches (16.5" x 7")

YES/NO

- 2. Dust shields
- 3. Automatic slack adjusters
- 4. Thirty/Thirty (30/30) square inch spring actuated service/parking brake chambers on all rear brakes

4. Wheels and Tires

A) Wheels

- 1. Ten (10) hole I.S.O. Steel disc type (9.00 x 22.5)
- 2. Hub piloted type
- 3. Painted White

B) Front Tires

- 1. Radial Firestone FS820 or Goodyear Radial G287
- 2. Size 315/80R22.5
- 3. Load range "L" twenty (20) ply
- 4. Spare rim and tire for front

State tire brand and type

GY - G287

C) Rear Tires

- 1. Radial Firestone T831 or Goodyear G177
- 2. Size 11/00R22.5
- 3. Load range "H" sixteen (16) ply

YES/NO

4. Two (2) spare Rims and tires for rear

State tire brand and type

GY- G177

(only 1 Spare Rear Rim/Tire from Motorola)

II. ENGINE, TRANSMISSION, DRIVE LINE:

1. Engine

A) Engine

1. Diesel Electronic. – Tier 4 Emissions
2. Four hundred fifty (450) horsepower (minimum)
3. One thousand six hundred fifty (1650) ft. lbs. Torque at twelve hundred (1200) RPM
4. Idle shut down for idle over 4 minutes
5. Over ride switch for exhaust regeneration
6. Engine exhaust /Engine Brake

B) Engine Accessories

1. Engine shut down electronic (key operated)
2. Engine oil drain plug magnetic
3. Oil filter to be full flow, throw away type
4. Engine coolant filter
5. Dual fuel filters (primary and secondary)
6. Engine block heater (Phillips 120 volt, 1500 watt.)
7. Air filter dual element with integral snow valve with controls in cab

YES/NO

✓/___

8. Air intake inside/outside from under hood for snow operation

✓/___

9. Governor electronic type, road speed seventy five (75) M.P.H.

State brand, make, model of engine specified:

Brand/Make DETROIT DIESEL

Model 6613

H.P. 450

Peak Torque 1650 @ 1100 RPM

Displacement (C.I.D.) 761.11

2. Transmission - PTO

A) Automatic Transmission

✓/___

1. Allison HD 4500RDS 6-speed electronic

✓/___

2. PTO drive type (left or right hand location will be determined by successful bidders and exhaust configuration)

✓/___

3. Oil cooler for auto transmission (water to oil type, factory installed)

✓/___

4. Transmission Control Module to be located inside cab, if mounting location is available from OEM FIRE WALL.

✓/___

5. Speed sensor wiring in cab for road speed. (Used by body builder)

✓/___

6. Factory wiring harness installed for PTO engage/disengage interfaced to transmission and engine controls. (Hot Shift Chelsea PTO system, PTO to be installed by Body/Hydraulic Vendor, PTO will be engaged by rocker switch with red pilot light in cab on console indicating PTO engagement. Console to be installed by body/hydraulic vendor, PTO to be engaged only when engine rpm is at idle and vehicle speed is LESS than twelve (12) MPH. PTO to disengage if vehicle speed exceeds thirty-seven (37) MPH.

Note: Contact Purchasing Department in writing for additional

YES/NO

information about PTO type and set up. Fax number (402) 593-4304 or email bgarber@sarpy.com.

B) Driveline

- 1. Spicer 1810 series minimum
- 2. Interaxle driveline Spicer 1710 series minimum

3. **Fuel System, Exhaust System, Coolant System**

A) Fuel System

- 1. Single aluminum fuel tank with stainless steel tank straps
- 2. One hundred (100) gallon capacity ✓
- 3. Driver side mounted with stainless steel straps
- 4. Fuel shut off valve
- 5. Fuel cooler - Modine type

State location and size of fuel tank

LEFT HAND ORDER CAB, 100 GALLON w/136 GALLON DEF.

B) Exhaust System

- 1. Single system shielded Bright Finish
- 2. Muffler horizontal
- 3. Vertical tail pipe
- 4. Frame mounted right side (passenger)
- 5. Shielded to protect driver/passenger when entering cab
- 6. Curved discharge pipe to prevent rain from entering (No rain cap)

YES/NO

✓ /

7. Horizontal after treatment device frame mounted outside frame rail under cab with heat protection shield

✓ /

8. Mounting of exhaust system and treatment device shall not extend more than 3" past back of cab

C) Coolant System - Radiator

✓ /

1. Radiator Extra duty, one thousand five hundred (1,500) square inch minimum with one thousand four hundred eighty (1,480) square inch minimum charge air cooler

✓ /

2. Deaeration system with tank and sight glass

D) Coolant System - Coolant

✓ /

1. All season extended life permanent anti-freeze to minus forty (-40) degrees Fahrenheit

E) Fan Drive

✓ /

1. Automatic on/off type control, with normally closed temperature control (Horton Drivemaster or equal)

F) Hoses

✓ /

1. Molded silicone type *Carles Blue Stain*

III. Battery, Charging System, Wiring, Lights:

1. Battery

✓ /

1. Three (3) group 31, twelve (12) volt

✓ /

2. Seven hundred (700) C.C.A. at zero (0) degrees

✓ /

3. Maintenance free type

✓ /

4. Battery box – aluminum mounted on passenger side or under driver side

YES/NO

cab

Specify battery type and C.C.A. at zero (0) degrees Fahrenheit

(3) Alliance Model 1230, 610071, 2375 CCA

2. Charging System

- 1. Alternator Delco-Remy or Bosch 24SI
- 2. One hundred Sixty (160) amp minimum
- 3. Electronic regulator

3. Wiring

- 1. Chassis wiring - color coded and continuously numbered
- 2. Junction box in cab for tail light, turn signal, backup light, key switch and control circuits
- 3. Power distribution center in cab with storage for additional fuses/circuit breaker and puller device provided
- 4. Radio filter noise suppression
- 5. Body builder wiring system to include sealed box for tail, stop/turn lights, backup, accessory power and ground at rear of chassis for trailer plug installation (sander and dump box)

4. Lights

- 1. Two (2) sealed beam headlights
- 2. LED parking lights integral with front turn signal and rear tail lights
- 3. Five (5) cab marker LED lights. Clearance light LED type
- 4. Two (2) LED stop, turn, tail and backup lights on rear with reflectors
- 5. Headlight dimmer switch integral with turn signal switch

YES/NO

- 6. Turn signal switch self canceling with integral hazard switch
- 7. Flasher electro-mechanical twelve (12) lamp capacity
- 8. Back up alarm
- 9. Front plow lights with turn signal wiring harness terminates under hood for left and right sides

IV. Cab, Cab Controls, Environmental:

1. Cab

A) Cab dimension

- 1. Conventional ~~steel~~ ^{ALUM} cab minimum eighty-two inches (82") wide
- 2. Fifty-six inches (56") floor to ceiling
- 3. Seventy inches (70") minimum inside width
- 4. Rear air ride cab mounted (Air bag type with shock)

B) Cab Interior

- 1. Two (2) arm rests, one each door
- 2. Floor covering black rubber
- 3. Driver seat, air suspension, high back vinyl, isolated two (2) position front cushion adjustment minus two (2) degree to plus fifteen (15) degree adjustment mechanical lumbar support with arm rest
- 4. Passenger seat non-suspension high back vinyl with arm rest
- 5. Seat belts two (2) sets, three (3) point lap and shoulder type
- 6. Premium cab sound insulation
- 7. Cab interior trim, headliner, doors, half (½) cab interior, pillar cover and

YES/NO

instrument panel

8. Dome light center mounted
9. Two (2) sun visors padded
10. Interior main accent color gray
11. Interior sheet metal color of exterior
12. AM-FM radio factory installed
13. Storage pocket in doors or back wall of cab
14. Overhead storage/console storage
15. 2- Way radio accommodation package for mounting with 20 amp fuse key operated
16. Power outlet source – cigarette/USB plug type for accessories
17. Power windows driver/passenger side
18. Power door locks driver/passenger side
19. 5(LB) rated ABC fire extinguisher mounted between driver's seat and door with valve aimed rearward
20. Emergency triangle kit parallel to inside surface of passenger's seat base

C) Cab Exterior

1. Grab handle(s) cab access, driver and passenger side (outside of cab)
2. Windows all tinted safety glass
3. Three (3) piece type - front end tilting type hood, with stationary grille
4. Mud flaps, splash guards and fender extension to protect engine and cab
5. Two (2) horns - air with snow covers
6. Two (2) west coast style mirrors - left hand and right hand, sixteen inch

YES/NO

- by seven inch (16" x 7") heated, breakaway type
7. Two (2) eight inch (8") diameter convex mirror mounted below primary mirrors
8. Bright finish or painted exterior sun visor
9. Exterior color – White, Vendor will provide paint color chip for approval

2. Cab Controls/Gauges

A) Cab controls

1. Largest window washer reservoir available with pump equipped with low level warning
2. Dual wipers electric two (2) speed with intermittent/delay
3. Cruise Control (75MPH)
4. Parking brake air valve

B) Gauges

1. Electronic speedometer with odometer includes trip meter
2. Electronic engine tachometer
3. Two (2) air gauges with alarm/light warning
4. Volt meter
5. Oil pressure (engine)
6. Coolant temperature gauge
7. Fuel Gauge
8. Transmission Temperature Gauge
9. Indicator, warning lights, or audible alarm for all dash mounted gauges

YES/NO

10. Indicator warning lights with audible alarm for low coolant

11. Air Filter Restriction Gauge

3. Environmental

A) Heater

1. Heater fresh air factory installed

2. High output heater multiple speed fan

3. Dual Defroster

B) Air Conditioning - Factory Installed, 134A Type

1. Combined with heater

2. Refrigerant - 134A

V. Paint - Finish:

1. Cab Chassis

A) Cab/Chassis Paint

1. Exterior color – white
Vendor will provide paint color chip for approval

2. Interior sheet metal same as exterior color

3. Interior color gray

4. Frame/Chassis color - gloss black

VI. Shop and Parts Manuals:

1. One (1) Operator Manual or CD ROM/Flash Drive per vehicle

2. One (1) Shop Repair Manual or CD ROM/Flash Drive per vehicle

3. One (1) Parts Manual or CD ROM/Flash Drive per vehicle

YES/NO

4. One (1) Electrical Manual or CD/Flash Drive per vehicle - AVAILABLE @ ACCESSRIGHT.COM @ N/C

5. PC diagnostic compatible software with data link available cables, DLB Engine Software

6. One (1) Automatic Transmission Technical Manual or CD/ Flash drive per vehicle

7. Provide information on training/repair/service available for Equipment specified

TECH ADVANCEMENT CENTER
STANLEY Klein - 402-592-2440

VII. Miscellaneous:

1. Truck shall be delivered to Sarpy County with all wheels balanced and all wheel alignment

VIII. Warranty:

1. Regular manufacturer's standard warranty, manufacturer's statement of origin and complete pre-delivery inspection certificates required with truck at delivery

2. The manufacturer's standard warranty shall be stated in the bid

3. Manufacturer's extended warranty options if available

State type/ length of time/cost

4. Engine: (std) 24RS/200,000 > 5/74RS PACKAGE 100,000
54RS/200K - \$3,665
24RS/250K - \$5,610

5. Transmission: (211) 34RS (UNLIMITED), 54RS @ \$730

6. Drive train: 24RS/200K FRONT AXLE, 24RS/200K REAR AXLE 54RS \$775 EXT'd

7. Body: 14RS/100K, 54RS CAB CORROSION - SID

* ALSO INCLUDES 24RS - FREE VIRTUAL TECHNICIANS.

YES/NO

/

8. Manufacturer's written warranty including engine, transmission and differential must accompany delivery

/

9. All warranty work shall be performed within State of Nebraska and within sixty (60) miles of Sarpy County Fleet Shop at 15100 So. 84th Street, Papillion, NE. 68046

/

10. Mechanical or body repair required under manufacturer's warranty prior to use of the vehicle by the County shall be the responsibility of the selling dealer, including the transportation thereof

/

11. Warranty to be effective from date of issuance of title assignment and the mileage warranty will begin from the mileage on odometer on date of title

/

12. The selling dealer will provide warranty activation cards or similar information in order to properly activate said warranty

/

13. Vendor must provide Order Number to Sarpy County Purchasing within ten (10) working days after purchase order is received

IX. Service:

/

1. Pre-delivery service will be performed by the dealer. Factory pre-delivery will not be accepted.

/

2. Information on factory schools/training to be provided to Sarpy County Fleet Services within six (6) months of purchase of unit. Vendor/Manufacturer must supply letter that manufacturer training of Sarpy County Fleet Service Technicians is available and any charges to Sarpy County for training.

EXCEPTIONS / CLARIFICATIONS / COMMENTS

1. REAR TIRES A: CAN ONLY GET A TOTAL OF TWO SPACE TIRES (FROM FACTORY. QUOTED 1 FRONT & 1 REAR).
2. TRANS-PTO A: TCM IS FIREWALL MOUNTED TO INSIDE CAB
3. FUEL SYSTEM: NO FUEL SHUTOFF VALVE, ONE TANK.
4. DRIVE LINE: MERITOR ILO SPICER
5. _____
6. _____
7. _____
8. _____
9. _____
10. _____

Sarpy County, Nebraska
Bid Form

Two (2) - 2015 - 64,000 GVWR Tandem Axle Cab Chassis

Make: FREIGHTLINER

Model: 114SD SFA

GVWR: 64,000 (min. 64,000 lbs)

Wheelbase: 208 Cab to Axle (CA) 125 BBC 137 w/ 29" Frame EXT.

Series, Code, Trim Level: ALUM CAB, DPK GRAY VINYL W/ INTERIOR CONVENIENCE PACKAGE

Engine: 12.8L / dd13 Torque: 1650 @ 1100 Horsepower: 450

Transmission: ALLISON 6SPD. AUTOMATIC 4500RDS

Alternator Size: DP12 Delco Ampere: 160 AMP.

Battery Size: GROUP 31 (3) CCA @ 0 deg. F: 3375

Warranty: 1 YRS / 100K Month/Miles: 100K

New ~~2014~~²⁰¹⁵ Tandem Axle Cab Chassis Unit Price: \$ 106,587.00 each. TURK

Delivery Date: 6-25-2014 AS OF 3/27/14

Build Out Date: 6-15-2014 " "

Company Information:

Years in business: 39 years

Total employees: 450

Total sales last 3 years: 715 - 50,000,000

References:

Company Name: ELLIOTT EQUIPMENT CO.
Address: 4427 SO 76TH CIRCUIT, DUNSMO, MO 68127
Contact Name: PAUL THOMAS
Phone Number: 402-932-7278 Fax Number: 402-592-4533
Date of Purchase: 2010, 2011, 2012, 13, 14, 15

Company Name: CRANE SALES & SERVICE
Address: 5910 SO 27TH ST DUNSMO, MO, 68107
Contact Name: RANDY HOOVER
Phone Number: 402-731-4655 Fax Number: 402-731-1116
Date of Purchase: 2011, 2012, 2013, 2014

Company Name: BUILDERS SUPPLY CO
Address: 5701 SO. 72ND ST. DUNSMO, MO. 68127
Contact Name: DOUG ALBERT
Phone Number: 402-331-4500 Fax Number: 402-331-1735
Date of Purchase: 2009, 10, 11, 12, 13, 14

Company Name: OPP
Address: 1101 NO 180TH ST DUNSMO, MO.
Contact Name: ROBLY HASSLER
Phone Number: 402-592-4940 Fax Number: 402-592-4969
Date of Purchase: 2007, 10, 11, 12, 13, 14, 15

Company Name: RUMER FREIGHT LLC
Address: 15910 PARKER ST. DUNSMO, MO 68118
Contact Name: RON BOENE
Phone Number: 402-630-0127 Fax Number: —
Date of Purchase: 2012, 2011, 12, 13, 14, 15

I certify that this bid is submitted in accordance with the specifications issued by Sarpy County.

The undersigned acknowledged receipt of the following addendums (if applicable):

Addendum #1 MR Noon
Addendum #2 _____

Attachments: Literature - 2 sets
Manufacturer's Specifications

Omaha Truck Center

Company Name

Michael R Noon

Company Representative (Please Print)

MR Noon

Authorized Signature

4522 So. 108th St, Omaha, NE

Address

68137

City, State & Zip

M.Noon@TRUCKCENTERCOMPANIES.COM

E-Mail address

402-592-0410

Telephone Number

402-592-7709

Fax Number

***NOTE: Sarpy County is tax exempt and will provide the proper form upon request.**

Prepared for:
DEB HOUGHTALING
SARPY COUNTY
1210 GOLDEN GATE DRIVE
SUITE 1116
PAPILLION, NE 68046
Phone: 402-593-4476


Prepared by:
Michael Noon
OMAHA TRUCK CENTER, INC.
10710 I STREET
OMAHA, NE 68127
Phone: 402-592-0440

A proposal for
SARPY COUNTY

Prepared by
OMAHA TRUCK CENTER, INC.
Michael Noon

Mar 24, 2014

Freightliner 114SD

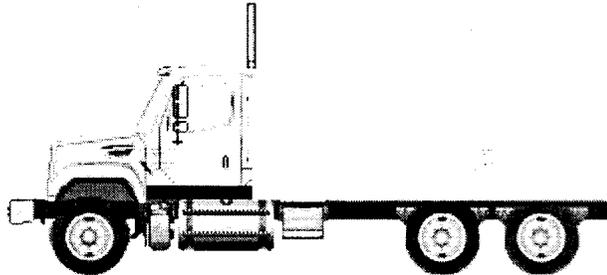

Components shown may not reflect all spec'd options and are not to scale



Prepared for:
 DEB HOUGHTALING
 SARPY COUNTY
 1210 GOLDEN GATE DRIVE
 SUITE 1116
 PAILLION, NE 68046
 Phone: 402-593-4476

Prepared by:
 Michael Noon
 OMAHA TRUCK CENTER, INC.
 10710 I STREET
 OMAHA, NE 68127
 Phone: 402-592-0440

S P E C I F I C A T I O N P R O P O S A L

Data Code	Description	Weight Front	Weight Rear	Retail Price
Price Level				
PRL-08D	SD PRL-08D (EFF:01/28/14)			STD
Data Version				
DRL-008	SPECPRO21 DATA RELEASE VER 008			N/C
Vehicle Configuration				
001-177	114SD CONVENTIONAL CHASSIS	8,015	6,640	\$139,082.00
004-215	2015 MODEL YEAR SPECIFIED			STD
002-003	SET FORWARD AXLE - TRUCK			STD
019-002	STRAIGHT TRUCK PROVISION			STD
003-001	LH PRIMARY STEERING LOCATION			STD
General Service				
AA1-002	TRUCK CONFIGURATION			STD
AA6-002	DOMICILED, USA (EXCLUDING CALIFORNIA AND CARB OPT-IN STATES)			N/C
A85-011	CONSTRUCTION SERVICE			STD
A84-1GM	GOVERNMENT BUSINESS SEGMENT			N/C
AA4-010	DIRT/SAND/ROCK COMMODITY			N/C
AA5-002	TERRAIN/DUTY: 100% (ALL) OF THE TIME, IN TRANSIT, IS SPENT ON PAVED ROADS			STD
AB1-008	MAXIMUM 8% EXPECTED GRADE			STD
AB5-001	SMOOTH CONCRETE OR ASPHALT PAVEMENT - MOST SEVERE IN-TRANSIT (BETWEEN SITES) ROAD SURFACE			STD
995-1AE	FREIGHTLINER LEVEL II WARRANTY			N/C
A66-99D	EXPECTED FRONT AXLE(S) LOAD : 18000.0 lbs			
A68-99D	EXPECTED REAR DRIVE AXLE(S) LOAD : 46000.0 lbs			
A63-99D	EXPECTED GROSS VEHICLE WEIGHT CAPACITY : 64000.0 lbs			
Truck Service				
AA3-018	FRONT PLOW/END DUMP BODY			N/C



Prepared for:
 DEB HOUGHTALING
 SARPY COUNTY
 1210 GOLDEN GATE DRIVE
 SUITE 1116
 PAPHILLION, NE 68046
 Phone: 402-593-4476

Prepared by:
 Michael Noon
 OMAHA TRUCK CENTER, INC.
 10710 I STREET
 OMAHA, NE 68127
 Phone: 402-592-0440

Data Code	Description	Weight Front	Weight Rear	Retail Price
Engine				
101-2T1	DETROIT DD13 12.8L 450 HP @ 1800 RPM, 2080 GOV RPM, 1650 LB/FT @ 1100 RPM			\$1,174.00
Electronic Parameters				
79A-075	75 MPH ROAD SPEED LIMIT			STD
79B-000	CRUISE CONTROL SPEED LIMIT SAME AS ROAD SPEED LIMIT			N/C
79G-003	4 MINUTES IDLE SHUTDOWN WITHOUT CLUTCH AND SERVICE BRAKE OVERRIDE			N/C
79K-007	PTO MODE ENGINE RPM LIMIT - 1100 RPM			N/C
79M-002	PTO MODE BRAKE OVERRIDE - SERVICE OR PARK BRAKE ENABLED			N/C
79P-002	PTO RPM WITH CRUISE SET SWITCH - 700 RPM			N/C
79Q-003	PTO RPM WITH CRUISE RESUME SWITCH - 800 RPM			N/C
79S-001	PTO MODE CANCEL VEHICLE SPEED - 5 MPH			N/C
79T-001	PTO MODE RPM INCREMENT - 25 RPM			N/C
79U-007	PTO GOVERNOR RAMP RATE - 250 RPM PER SECOND			N/C
79V-001	ENABLE REGENERATION IN PTO MODE			N/C
79W-001	ONE REMOTE PTO SPEED			N/C
79X-005	REMOTE PTO SPEED 1 SETTING - 900 RPM			N/C
80G-001	PTO MINIMUM RPM - 600			N/C
Engine Equipment				
99C-013	2013 ONBOARD DIAGNOSTICS/2010 EPA/CARB/GHG14			STD
99D-011	2008 CARB EMISSION CERTIFICATION - CLEAN IDLE (INCLUDES 6X4 INCH LABEL ON LOWER FORWARD CORNER OF DRIVER DOOR)			\$106.00
13E-001	STANDARD OIL PAN			STD
105-001	ENGINE MOUNTED OIL CHECK AND FILL			STD
014-1C5	SIDE OF HOOD AIR INTAKE WITH FIREWALL MOUNTED DONALDSON AIR CLEANER AND INSIDE/OUTSIDE AIR WITH SNOW DOOR	10		\$653.00
124-1D7	DR 12V 160 AMP 28-SI QUADRAMOUNT PAD ALTERNATOR WITH REMOTE BATTERY VOLT SENSE			STD
292-071	(3) ALLIANCE MODEL 1231, GROUP 31, 12 VOLT MAINTENANCE FREE 3375 CCA THREADED STUD BATTERIES			STD
290-017	BATTERY BOX FRAME MOUNTED			STD
281-001	STANDARD BATTERY JUMPERS			STD



Prepared for:
 DEB HOUGHTALING
 SARPY COUNTY
 1210 GOLDEN GATE DRIVE
 SUITE 1116
 PAPHILLION, NE 68046
 Phone: 402-593-4476

Prepared by:
 Michael Noon
 OMAHA TRUCK CENTER, INC.
 10710 I STREET
 OMAHA, NE 68127
 Phone: 402-592-0440

Data Code	Description	Weight Front	Weight Rear	Retail Price
282-003	SINGLE BATTERY BOX FRAME MOUNTED LH SIDE BACK OF CAB			STD
291-017	WIRE GROUND RETURN FOR BATTERY CABLES WITH ADDITIONAL FRAME GROUND RETURN			STD
289-001	NON-POLISHED BATTERY BOX COVER			STD
107-044	BW MODEL BA-921 19.0 CFM SINGLE CYLINDER AIR COMPRESSOR WITH SAFETY VALVE			STD
152-041	ELECTRONIC ENGINE INTEGRAL SHUTDOWN PROTECTION SYSTEM			STD
128-002	JACOBS COMPRESSION BRAKE			STD
016-1C2	RH OUTBOARD UNDER STEP MOUNTED HORIZONTAL AFTERTREATMENT SYSTEM ASSEMBLY WITH RH B-PILLAR MOUNTED VERTICAL TAILPIPE	30	25	\$874.00
28F-002	ENGINE AFTERTREATMENT DEVICE, AUTOMATIC OVER THE ROAD REGENERATION AND DASH MOUNTED REGENERATION REQUEST SWITCH			STD
239-026	10 FOOT 06 INCH (126 INCH+0/-5 INCH) EXHAUST SYSTEM HEIGHT			N/C
233-017	STANDARD CURVE BRIGHT UPPER STACK(S)			\$244.00
237-1CR	RH CURVED VERTICAL TAILPIPE B-PILLAR MOUNTED ROUTED FROM STEP			N/C
23U-002	13 GALLON DIESEL EXHAUST FLUID TANK			STD
30N-003	100 PERCENT DIESEL EXHAUST FLUID FILL			STD
23Y-001	STANDARD DIESEL EXHAUST FLUID PUMP MOUNTING			STD
43X-002	LH MEDIUM DUTY STANDARD DIESEL EXHAUST FLUID TANK LOCATION			STD
43Y-001	STANDARD DIESEL EXHAUST FLUID TANK CAP			STD
242-001	STAINLESS STEEL AFTERTREATMENT DEVICE/MUFFLER/TAILPIPE SHIELD			\$18.00
273-036	BORG WARNER (KYSOR) REAR AIR ON/OFF ENGINE FAN CLUTCH			STD
276-001	AUTOMATIC FAN CONTROL WITHOUT DASH SWITCH, NON ENGINE MOUNTED			STD
110-068	DDC SUPPLIED ENGINE MOUNTED FUEL FILTER/FUEL WATER SEPARATOR WITH WATER-IN-FUEL INDICATOR			STD
118-001	FULL FLOW OIL FILTER			STD
120-036	DDC SUPPLIED COOLANT FILTER, ENGINE MOUNTED			STD
* 266-057	1500 SQUARE INCH ALUMINUM RADIATOR			STD
103-004	ANTIFREEZE TO -34F, NOAT EXTENDED LIFE COOLANT			STD



Prepared for:
 DEB HOUGHTALING
 SARPY COUNTY
 1210 GOLDEN GATE DRIVE
 SUITE 1116
 PAPHILLION, NE 68046
 Phone: 402-593-4476

Prepared by:
 Michael Noon
 OMAHA TRUCK CENTER, INC.
 10710 I STREET
 OMAHA, NE 68127
 Phone: 402-592-0440

Data Code	Description	Weight Front	Weight Rear	Retail Price
171-007	GATES BLUE STRIPE COOLANT HOSES OR EQUIVALENT			STD
172-001	CONSTANT TENSION HOSE CLAMPS FOR COOLANT HOSES			STD
270-016	RADIATOR DRAIN VALVE			STD
138-005	PHILLIPS-TEMRO 1500 WATT/115 VOLT BLOCK HEATER	4		\$128.00
140-022	CHROME ENGINE HEATER RECEPTACLE MOUNTED UNDER LH DOOR			\$14.00
155-065	DELCO 12V 39MT+ HD/OCP STARTER WITH THERMAL PROTECTION AND INTEGRATED MAGNETIC SWITCH			STD
Transmission				
342-1M3	ALLISON 4500 RDS AUTOMATIC TRANSMISSION WITH PTO PROVISION	210	60	\$22,458.00
Transmission Equipment				
343-339	ALLISON VOCATIONAL PACKAGE 223 - AVAILABLE ON 3000/4000 PRODUCT FAMILIES WITH VOCATIONAL MODELS RDS, HS, MH AND TRV			N/C
84B-012	ALLISON VOCATIONAL RATING FOR ON/OFF HIGHWAY APPLICATIONS AVAILABLE WITH ALL PRODUCT FAMILIES			N/C
84C-023	PRIMARY MODE GEARS, LOWEST GEAR 1, START GEAR 1, HIGHEST GEAR 6, AVAILABLE FOR 3000/4000 PRODUCT FAMILIES ONLY			N/C
84D-023	SECONDARY MODE GEARS, LOWEST GEAR 1, START GEAR 1, HIGHEST GEAR 6, AVAILABLE FOR 3000/4000 PRODUCT FAMILIES ONLY			N/C
353-027	VEHICLE INTERFACE WIRING AND PDM WITH BODY BUILDER CONNECTOR AT END OF FRAME			\$794.00
34C-001	ELECTRONIC TRANSMISSION CUSTOMER ACCESS CONNECTOR FIREWALL MOUNTED			\$22.00
362-035	CUSTOMER INSTALLED CHELSEA 277 SERIES PTO			N/C
363-001	PTO MOUNTING, LH SIDE OF MAIN TRANSMISSION			N/C
341-018	MAGNETIC PLUGS, ENGINE DRAIN, TRANSMISSION DRAIN, AXLE(S) FILL AND DRAIN			N/C
345-003	PUSH BUTTON ELECTRONIC SHIFT CONTROL, DASH MOUNTED			N/C
97G-004	TRANSMISSION PROGNOSTICS - ENABLED 2013			N/C



Prepared for:
 DEB HOUGHTALING
 SARPY COUNTY
 1210 GOLDEN GATE DRIVE
 SUITE 1116
 PAPANILLION, NE 68046
 Phone: 402-593-4476

Prepared by:
 Michael Noon
 OMAHA TRUCK CENTER, INC.
 10710 I STREET
 OMAHA, NE 68127
 Phone: 402-592-0440

Data Code	Description	Weight Front	Weight Rear	Retail Price
370-011	WATER TO OIL TRANSMISSION COOLER, FRAME MOUNTED			N/C
346-003	TRANSMISSION OIL CHECK AND FILL WITH ELECTRONIC OIL LEVEL CHECK			N/C
35T-001	SYNTHETIC TRANSMISSION FLUID (TES-295 COMPLIANT)			N/C
Front Axle and Equipment				
400-1BA	DETROIT DA-F-18.0-5 18,000# FL1 71.0 KPI/3.74 DROP SINGLE FRONT AXLE	210		\$2,196.00
402-030	MERITOR 16.5X6 Q+ CAST SPIDER CAM FRONT BRAKES, DOUBLE ANCHOR, FABRICATED SHOES			N/C
403-002	NON-ASBESTOS FRONT BRAKE LINING			STD
419-023	CONMET CAST IRON FRONT BRAKE DRUMS			STD
427-001	FRONT BRAKE DUST SHIELDS	5		\$106.00
409-021	SKF SCOTSEAL PLUS XL FRONT OIL SEALS			STD
408-001	VENTED FRONT HUB CAPS WITH WINDOW, CENTER AND SIDE PLUGS - OIL			STD
416-022	STANDARD SPINDLE NUTS FOR ALL AXLES			STD
405-002	MERITOR AUTOMATIC FRONT SLACK ADJUSTERS			STD
406-001	STANDARD KING PIN BUSHINGS			STD
536-055	TRW THP-60 POWER STEERING WITH RCH45 AUXILIARY GEAR	130		\$1,248.00
539-003	POWER STEERING PUMP			STD
534-003	4 QUART POWER STEERING RESERVOIR	5		N/C
533-001	OIL/AIR POWER STEERING COOLER	5		N/C
40T-001	ORGANIC SAE 80/90 FRONT AXLE LUBE			STD
Front Suspension				
620-005	18,000# FLAT LEAF FRONT SUSPENSION	290		\$767.00
619-004	GRAPHITE BRONZE BUSHINGS WITH SEALS - FRONT SUSPENSION			N/C
410-001	FRONT SHOCK ABSORBERS			STD
Rear Axle and Equipment				
420-111	RT-46-160P 46,000# R-SERIES TANDEM REAR AXLE		450	\$4,311.00
421-489	4.89 REAR AXLE RATIO			\$147.00
424-001	IRON REAR AXLE CARRIER WITH STANDARD AXLE HOUSING			STD
386-075	MXL 18T MERITOR EXTENDED LUBE MAIN DRIVELINE WITH HALF ROUND YOKES	40	40	STD



Prepared for:
 DEB HOUGHTALING
 SARPY COUNTY
 1210 GOLDEN GATE DRIVE
 SUITE 1116
 PAPIILLION, NE 68046
 Phone: 402-593-4476

Prepared by:
 Michael Noon
 OMAHA TRUCK CENTER, INC.
 10710 I STREET
 OMAHA, NE 68127
 Phone: 402-592-0440

Data Code	Description	Weight Front	Weight Rear	Retail Price
388-073	MXL 17T MERITOR EXTENDED LUBE INTERAXLE DRIVELINE WITH HALF ROUND YOKES			STD
878-019	(1) INTERAXLE LOCK VALVE FOR TANDEM OR TRIDEM DRIVE AXLES			STD
87A-001	BLINKING LAMP WITH EACH MODE SWITCH, INTERAXLE UNLOCK DEFAULT WITH IGNITION OFF			STD
423-020	MERITOR 16.5X7 Q+ CAST SPIDER CAM REAR BRAKES, DOUBLE ANCHOR, FABRICATED SHOES			STD
433-002	NON-ASBESTOS REAR BRAKE LINING			STD
434-005	BRAKE CAMS AND CHAMBERS ON FORWARD SIDE OF DRIVE AXLE(S) WITH AUXILIARY SUPPORT BRACKETS			N/C
451-023	CONMET CAST IRON REAR BRAKE DRUMS			STD
425-002	REAR BRAKE DUST SHIELDS		10	\$114.00
440-021	SKF SCOTSEAL PLUS XL REAR OIL SEALS			STD
426-075	HALDEX GOLDSEAL LONGSTROKE 2-DRIVE AXLES SPRING PARKING CHAMBERS			STD
428-002	MERITOR AUTOMATIC REAR SLACK ADJUSTERS			STD
41T-001	ORGANIC SAE 80/90 REAR AXLE LUBE			STD
Rear Suspension				
622-108	AIRLINER 46,000# REAR SUSPENSION WITH CHAIN CLEARANCE		440	\$2,483.00
621-007	AIRLINER HIGH POSITION RIDE HEIGHT			N/C
431-005	AXLE SEATS WITH RETAINERS			N/C
624-025	55 INCH AXLE SPACING			N/C
888-047	MANUAL DUMP VALVE FOR AIR SUSPENSION WITHOUT GAUGE			\$91.00
87D-006	INDICATOR LIGHT FOR EACH REAR SUSPENSION CONTROL SWITCH			N/C
910-001	SINGLE AIR REAR SUSPENSION LEVELING VALVE			N/C
623-002	TRANSVERSE CONTROL RODS			N/C
439-005	REAR SHOCK ABSORBERS - TWO AXLES (TANDEM) (AIR RIDE SUSPENSION)			N/C
Brake System				
490-101	WABCO 4S/4M ABS WITH TRACTION CONTROL			\$188.00
871-001	REINFORCED NYLON, FABRIC BRAID AND WIRE BRAID CHASSIS AIR LINES			STD
904-001	FIBER BRAID PARKING BRAKE HOSE			STD
412-001	STANDARD BRAKE SYSTEM VALVES			STD



Prepared for:
 DEB HOUGHTALING
 SARPY COUNTY
 1210 GOLDEN GATE DRIVE
 SUITE 1116
 PAPHILLION, NE 68046
 Phone: 402-593-4476

Prepared by:
 Michael Noon
 OMAHA TRUCK CENTER, INC.
 10710 I STREET
 OMAHA, NE 68127
 Phone: 402-592-0440

Data Code	Description	Weight Front	Weight Rear	Retail Price
46D-002	STANDARD AIR SYSTEM PRESSURE PROTECTION SYSTEM			STD
413-002	STD U.S. FRONT BRAKE VALVE			STD
432-003	RELAY VALVE WITH 5-8 PSI CRACK PRESSURE, NO REAR PROPORTIONING VALVE			STD
480-009	BW AD-9 BRAKE LINE AIR DRYER WITH HEATER	20		N/C
483-003	BENDIX OIL COALESCING FILTER FOR AIR DRYER			N/C
479-015	AIR DRYER FRAME MOUNTED			STD
460-001	STEEL AIR BRAKE RESERVOIRS			STD
477-011	PETCOCK DRAIN VALVES ON ALL AIR TANK(S)			(\$3.00)
Trailer Connections				
335-004	UPGRADED CHASSIS MULTIPLEXING UNIT			STD
Wheelbase & Frame				
545-527	5275MM (208 INCH) WHEELBASE			N/C
546-1B2	1/2X3.64X11-7/8 INCH STEEL FRAME (12.7MMX301.6MM/0.5X11.88 INCH) 120KSI	390	230	\$1,922.00
547-034	PARTIAL INNER FRAME REINFORCEMENT AT FRONT SUSPENSION	180		\$937.00
548-803	BODY COMPANY INSTALLED ADDITIONAL FRONT FRAME REINFORCEMENT FOR SNOW PLOW			N/C
552-043	1975MM (78 INCH) REAR FRAME OVERHANG			N/C
55W-007	FRAME OVERHANG RANGE: 71 INCH TO 80 INCH	-30	110	N/C
549-002	24 INCH INTEGRAL FRONT FRAME EXTENSION	115	-20	\$500.00
AC8-99D	CALC'D BACK OF CAB TO REAR SUSP C/L (CA) : 124.54 in			
AE8-99D	CALCULATED EFFECTIVE BACK OF CAB TO REAR SUSPENSION C/L (CA) : 121.54 in			
AE4-99D	CALC'D FRAME LENGTH - OVERALL : 337.69			
AM6-99D	CALC'D SPACE AVAILABLE FOR DECKPLATE : 124.54 in			
FSS-0LH	CALCULATED FRAME SPACE LH SIDE : 36.12 in			N/C
FSS-0RH	CALCULATED FRAME SPACE RH SIDE : 91.82 in			N/C
553-001	SQUARE END OF FRAME			STD
587-003	REAR TOW HOOKS		10	\$49.00
550-001	FRONT CLOSING CROSSMEMBER			STD
559-001	STANDARD WEIGHT ENGINE CROSSMEMBER			STD
562-001	STANDARD MIDSHIP #1 CROSSMEMBER(S)			STD
572-001	STANDARD REARMOST CROSSMEMBER			STD



Prepared for:
 DEB HOUGHTALING
 SARPY COUNTY
 1210 GOLDEN GATE DRIVE
 SUITE 1116
 PAPHILLION, NE 68046
 Phone: 402-593-4476

Prepared by:
 Michael Noon
 OMAHA TRUCK CENTER, INC.
 10710 I STREET
 OMAHA, NE 68127
 Phone: 402-592-0440

Data Code	Description	Weight Front	Weight Rear	Retail Price
565-002	HEAVY DUTY SUSPENSION CROSSMEMBER			N/C
Chassis Equipment				
556-1AG	16.5 INCH PAINTED STEEL STRAIGHT BUMPER			STD
558-001	FRONT TOW HOOKS - FRAME MOUNTED	15		\$96.00
574-001	BUMPER MOUNTING FOR SINGLE LICENSE PLATE			STD
551-001	HUCK-SPIN ROUND COLLAR CHASSIS FASTENERS SUSPENSIONS ONLY			\$56.00
Fuel Tanks				
204-156	100 GALLON/378 LITER ALUMINUM FUEL TANK - LH	20		\$206.00
218-006	25 INCH DIAMETER FUEL TANK(S)			STD
215-007	PLAIN ALUMINUM/PAINTED STEEL FUEL/HYDRAULIC TANK(S) WITH POLISHED STAINLESS STEEL BANDS			\$272.00
212-007	FUEL TANK(S) FORWARD			STD
664-001	PLAIN STEP FINISH			STD
205-001	FUEL TANK CAP(S)			STD
216-020	EQUIFLO INBOARD FUEL SYSTEM			STD
202-016	HIGH TEMPERATURE REINFORCED NYLON FUEL LINE			STD
221-001	FUEL COOLER	10		\$148.00
Tires				
093-1N0	GOODYEAR G287 MSA 315/80R22.5 20 PLY RADIAL FRONT TIRES	70		\$826.00
094-982	GOODYEAR G177 11R22.5 16 PLY RADIAL REAR TIRES		256	\$920.00
* 510-1N0	GOODYEAR G287 MSA 315/80R22.5 20 PLY RADIAL SPARE TIRE		115	\$1,201.00
* 508-982	GOODYEAR G177 11R22.5 16 PLY RADIAL ADDITIONAL SPARE TIRE			\$872.00
Hubs				
418-045	CONMET PRE-SET BEARING IRON FRONT HUBS			STD
450-045	CONMET PRE-SET BEARING IRON REAR HUBS			STD
Wheels				
502-433	ACCURIDE 29039 22.5X9.00 10-HUB PILOT 5.25 INSET 5-HAND STEEL DISC FRONT WHEELS	50		\$222.00
505-428	ACCURIDE 28828 22.5X8.25 10-HUB PILOT 2-HAND HD STEEL DISC REAR WHEELS		40	STD
511-433	ACCURIDE 29039 22.5X9.00 10-HUB PILOT 5.25 INSET 5-HAND STEEL DISC SPARE WHEEL		103	\$347.00



Prepared for:
 DEB HOUGHTALING
 SARPY COUNTY
 1210 GOLDEN GATE DRIVE
 SUITE 1116
 PAPHILLION, NE 68046
 Phone: 402-593-4476

Prepared by:
 Michael Noon
 OMAHA TRUCK CENTER, INC.
 10710 I STREET
 OMAHA, NE 68127
 Phone: 402-592-0440

Data Code	Description	Weight Front	Weight Rear	Retail Price
* 51A-428	ACCURIDE 28828 22.5X8.25 10-HUB PILOT 2-HAND HD STEEL DISC ADDITIONAL SPARE WHEEL		68	\$218.00
Cab Exterior				
829-1A2	114 INCH BBC FLAT ROOF ALUMINUM CONVENTIONAL CAB			STD
650-008	AIR CAB MOUNTS			STD
648-002	NONREMOVABLE BUGSCREEN MOUNTED BEHIND GRILLE			STD
754-002	3-1/2 INCH FENDER EXTENSIONS	15		\$195.00
678-001	LH AND RH GRAB HANDLES			STD
646-041	STATIONARY BLACK GRILLE			STD
65X-004	BLACK HOOD MOUNTED AIR INTAKE GRILLE			STD
644-004	FIBERGLASS HOOD			STD
727-1AJ	DUAL 14 INCH ROUND POLISHED AIR HORNS	4		\$101.00
726-001	SINGLE ELECTRIC HORN			STD
728-002	DUAL HORN SHIELDS			N/C
657-1CV	DOOR LOCKS AND IGNITION SWITCH KEYED THE SAME WITH (4) KEYS			\$19.00
575-001	REAR LICENSE PLATE MOUNT END OF FRAME			STD
312-068	HALOGEN COMPOSITE HEADLAMPS WITH BLACK BEZELS			STD
302-047	LED AERODYNAMIC MARKER LIGHTS			\$40.00
294-042	FREIGHTLINER LED FLANGE MOUNTED STOP/TAI/TURN LIGHTS WITH SEPARATE INCANDESCENT BACKUP LIGHTS		5	\$123.00
300-015	STANDARD FRONT TURN SIGNAL LAMPS			STD
744-1BM	DUAL WEST COAST BRIGHT FINISH HEATED MIRRORS			\$159.00
797-001	DOOR MOUNTED MIRRORS			STD
796-001	102 INCH EQUIPMENT WIDTH			STD
743-204	LH AND RH 8 INCH BRIGHT FINISH CONVEX MIRRORS MOUNTED UNDER PRIMARY MIRRORS			N/C
729-001	STANDARD SIDE/REAR REFLECTORS			STD
677-053	RH AFTERTREATMENT SYSTEM CAB ACCESS WITH STEEL SHIELDING			STD
764-010	COMPOSITE EXTERIOR SUN VISOR	10		\$247.00
768-043	63X14 INCH TINTED REAR WINDOW			STD
661-004	TINTED DOOR GLASS LH AND RH WITH TINTED OPERATING WING WINDOWS			STD
654-011	RH AND LH ELECTRIC POWERED WINDOWS	4		\$218.00



Prepared for:
 DEB HOUGHTALING
 SARPY COUNTY
 1210 GOLDEN GATE DRIVE
 SUITE 1116
 PAPIILLION, NE 68046
 Phone: 402-593-4476

Prepared by:
 Michael Noon
 OMAHA TRUCK CENTER, INC.
 10710 I STREET
 OMAHA, NE 68127
 Phone: 402-592-0440

Data Code	Description	Weight Front	Weight Rear	Retail Price
663-013	TINTED WINDSHIELD			STD
659-007	8 LITER WINDSHIELD WASHER RESERVOIR, CAB MOUNTED, WITHOUT FLUID LEVEL INDICATOR			STD
Cab Interior				
707-1AK	OPAL GRAY VINYL INTERIOR			STD
055-004	INTERIOR CONVENIENCE PACKAGE WITH CB PROVISION			\$359.00
706-016	MOLDED DOOR PANEL WITH UPPER VINYL INSERTS			N/C
708-016	MOLDED DOOR PANEL WITH UPPER VINYL INSERTS			N/C
772-006	BLACK MATS WITH SINGLE INSULATION			STD
785-004	DASH MOUNTED ASH TRAY(S) WITHOUT LIGHTER			STD
691-008	FORWARD ROOF MOUNTED CONSOLE WITH UPPER STORAGE COMPARTMENTS WITHOUT NETTING			STD
696-012	CENTER STORAGE CONSOLE MOUNTED ON BACKWALL	20		\$24.00
742-007	(2) CUP HOLDERS LH AND RH DASH			STD
680-007	GRAY/CHARCOAL WING DASH			STD
860-004	SMART SWITCH EXPANSION MODULE			\$169.00
720-003	5 LB. FIRE EXTINGUISHER	10		\$65.00
700-002	HEATER, DEFROSTER AND AIR CONDITIONER			STD
701-001	STANDARD HVAC DUCTING			STD
703-005	MAIN HVAC CONTROLS WITH RECIRCULATION SWITCH			STD
170-015	STANDARD HEATER PLUMBING			STD
130-033	DENSO HEAVY DUTY AIR CONDITIONER COMPRESSOR			STD
702-002	BINARY CONTROL, R-134A			STD
739-034	PREMIUM INSULATION			\$173.00
285-013	SOLID-STATE CIRCUIT PROTECTION AND FUSES			STD
280-007	12V NEGATIVE GROUND ELECTRICAL SYSTEM			STD
324-011	DOME DOOR ACTIVATED LH AND RH, DUAL READING LIGHTS, FORWARD CAB ROOF			N/C
655-005	LH AND RH ELECTRIC DOOR LOCKS			\$99.00
284-023	(1) 12 VOLT POWER SUPPLY IN DASH			STD
722-002	TRIANGULAR REFLECTORS WITHOUT FLARES	10		\$25.00



Prepared for:
 DEB HOUGHTALING
 SARPY COUNTY
 1210 GOLDEN GATE DRIVE
 SUITE 1116
 PAPHILLION, NE 68046
 Phone: 402-593-4476

Prepared by:
 Michael Noon
 OMAHA TRUCK CENTER, INC.
 10710 I STREET
 OMAHA, NE 68127
 Phone: 402-592-0440

Data Code	Description	Weight Front	Weight Rear	Retail Price
756-1J3	BASIC HIGH BACK AIR SUSPENSION DRIVER SEAT WITH MECHANICAL LUMBAR AND INTEGRATED CUSHION EXTENSION	30		\$221.00
760-1DC	BASIC HIGH BACK NON SUSPENSION PASSENGER SEAT			STD
759-006	DUAL DRIVER SEAT ARMRESTS AND INBOARD PASSENGER SEAT ARMREST	6		\$104.00
711-004	LH AND RH INTEGRAL DOOR PANEL ARMRESTS			STD
758-036	VINYL WITH VINYL INSERT DRIVER SEAT			STD
761-036	VINYL WITH VINYL INSERT PASSENGER SEAT			STD
763-032	3 POINT FIXED D-RING RETRACTOR DRIVER AND PASSENGER SEAT BELTS			STD
532-002	ADJUSTABLE TILT AND TELESCOPING STEERING COLUMN	10		\$478.00
540-015	4-SPOKE 18 INCH (450MM) STEERING WHEEL			STD
765-002	DRIVER AND PASSENGER INTERIOR SUN VISORS			STD

Instruments & Controls

732-003	WOODGRAIN DRIVER INSTRUMENT PANEL			N/C
734-003	WOODGRAIN CENTER INSTRUMENT PANEL			N/C
870-001	BLACK GAUGE BEZELS			STD
486-001	LOW AIR PRESSURE LIGHT AND BUZZER			STD
840-002	2 INCH PRIMARY AND SECONDARY AIR PRESSURE GAUGES			STD
198-025	INTAKE MOUNTED AIR RESTRICTION INDICATOR WITHOUT GRADUATIONS			STD
721-025	97 DB BACKUP ALARM MOUNTED INBOARD OF RAIL		3	\$71.00
149-017	ELECTRONIC CRUISE CONTROL WITH SWITCHES ON AUXILIARY GAUGE PANEL (B DASH PANEL)			STD
156-007	KEY OPERATED IGNITION SWITCH AND INTEGRAL START POSITION; 4 POSITION OFF/RUN/START/ACCESSORY			STD
811-011	ODOMETER/TRIP/HOUR/DIAGNOSTIC/VOLTAGE DISPLAY: 1X7 CHARACTER, 26 WARNING LAMPS, DATA LINKED, ICU3			STD
160-025	DIAGNOSTIC INTERFACE CONNECTOR, 9 PIN, SAE J1939, LOCATED BELOW DASH			STD
844-001	2 INCH ELECTRIC FUEL GAUGE			STD
845-011	FUEL FILTER RESTRICTION INDICATOR			STD
148-003	PROGRAMMABLE RPM CONTROL - ELECTRONIC ENGINE			STD



Prepared for:
 DEB HOUGHTALING
 SARPY COUNTY
 1210 GOLDEN GATE DRIVE
 SUITE 1116
 PAILLION, NE 68046
 Phone: 402-593-4476

Prepared by:
 Michael Noon
 OMAHA TRUCK CENTER, INC.
 10710 I STREET
 OMAHA, NE 68127
 Phone: 402-592-0440

Data Code	Description	Weight Front	Weight Rear	Retail Price
856-001	ELECTRICAL ENGINE COOLANT TEMPERATURE GAUGE			STD
864-001	2 INCH TRANSMISSION OIL TEMPERATURE GAUGE			N/C
830-017	ENGINE AND TRIP HOUR METERS INTEGRAL WITHIN DRIVER DISPLAY			STD
372-043	(1) DASH MOUNTED PTO SWITCH WITH INDICATOR LAMP - PARK BRAKE AND NEUTRAL INTERLOCK	5		\$111.00
852-002	ELECTRIC ENGINE OIL PRESSURE GAUGE			STD
679-001	OVERHEAD INSTRUMENT PANEL			N/C
746-1A2	AM/FM/WB RADIO WITH FRONT AUXILIARY INPUT	10		\$320.00
747-001	DASH MOUNTED RADIO			N/C
750-002	(2) RADIO SPEAKERS IN CAB			N/C
753-001	AM/FM ANTENNA MOUNTED ON FORWARD LH ROOF	2		N/C
748-006	POWER AND GROUND WIRING PROVISION			N/C
749-001	ROOF/OVERHEAD CONSOLE CB RADIO PROVISION WITH FACE PLATE			\$92.00
810-027	ELECTRONIC MPH SPEEDOMETER WITH SECONDARY KPH SCALE, WITHOUT ODOMETER			STD
812-001	ELECTRONIC 3000 RPM TACHOMETER			STD
813-1B4	DETROIT CONNECT VIRTUAL TECHNICIAN REMOTE ENGINE DIAGNOSTICS (DETROIT ENGINES ONLY)			STD
81X-001	2 YEAR SERVICE CONTRACT INCLUDED WITH VIRTUAL TECHNICIAN			STD
162-002	IGNITION SWITCH CONTROLLED ENGINE STOP			STD
836-015	DIGITAL VOLTAGE DISPLAY INTEGRAL WITH DRIVER DISPLAY			STD
660-008	SINGLE ELECTRIC WINDSHIELD WIPER MOTOR WITH DELAY			STD
304-039	MARKER LIGHT SWITCH INTEGRAL WITH HEADLIGHT SWITCH AND DUAL CONNECTORS AND SWITCH FOR CUSTOMER FURNISHED SNOW PLOW LIGHTS, LOW BEAMS OFF WITH HIGH BEAMS			\$269.00
882-009	ONE VALVE PARKING BRAKE SYSTEM WITH WARNING INDICATOR			STD
299-013	SELF CANCELING TURN SIGNAL SWITCH WITH DIMMER, WASHER/WIPER AND HAZARD IN HANDLE			STD



Prepared for:
 DEB HOUGHTALING
 SARPY COUNTY
 1210 GOLDEN GATE DRIVE
 SUITE 1116
 PAPPILLION, NE 68046
 Phone: 402-593-4476

Prepared by:
 Michael Noon
 OMAHA TRUCK CENTER, INC.
 10710 I STREET
 OMAHA, NE 68127
 Phone: 402-592-0440

Data Code	Description	Weight Front	Weight Rear	Retail Price
298-039	INTEGRAL ELECTRONIC TURN SIGNAL FLASHER WITH HAZARD LAMPS OVERRIDING STOP LAMPS			STD
Design				
065-000	PAINT: ONE SOLID COLOR			STD
Color				
980-5F6	CAB COLOR A: L0006EB WHITE ELITE BC			STD
986-020	BLACK, HIGH SOLIDS POLYURETHANE CHASSIS PAINT			STD
962-972	POWDER WHITE (N0006EA) FRONT WHEELS/RIMS (PKWHT21, TKWHT21, W, TW)			STD
966-972	POWDER WHITE (N0006EA) REAR WHEELS/RIMS (PKWHT21, TKWHT21, W, TW)			STD
964-020	STANDARD BLACK BUMPER PAINT			STD
976-995	SUNVISOR PAINTED SAME AS CAB COLOR A			N/C
Destination Charge				
P73-2FT	STANDARD DESTINATION FREIGHTLINER			\$2,000.00
Certification / Compliance				
996-001	U.S. FMVSS CERTIFICATION, EXCEPT SALES CABS AND GLIDER KITS			STD
Sales Programs				
NO SALES PROGRAMS HAVE BEEN SELECTED				

TOTAL VEHICLE SUMMARY

Adjusted List Price

Adjusted List Price ** \$189,689.00

Weight Summary

	Weight Front	Weight Rear	Total Weight
Factory Weight ⁺	9930 lbs	8585 lbs	18515 lbs
Total Weight ⁺	9930 lbs	8585 lbs	18515 lbs



Prepared for:
DEB HOUGHTALING
SARPY COUNTY
1210 GOLDEN GATE DRIVE
SUITE 1116
PAPILLION, NE 68046
Phone: 402-593-4476

Prepared by:
Michael Noon
OMAHA TRUCK CENTER, INC.
10710 I STREET
OMAHA, NE 68127
Phone: 402-592-0440

**ITEMS NOT INCLUDED IN ADJUSTED LIST
PRICE**

Other Factory Charges

R1X-001	2 YEAR SERVICE CONTRACT INCLUDED WITH VIRTUAL TECHNICIAN - PRICING	N/C
	STANDARD DELIVERY CHARGE	\$2,000.00

(+) Weights shown are estimates only.

If weight is critical, contact Customer Application Engineering.


(**) Prices shown do not include taxes, fees, etc... "Net Equipment Selling Price" is located on the Quotation Details Proposal Report.



Prepared for:
 DEB HOUGHTALING
 SARPY COUNTY
 1210 GOLDEN GATE DRIVE
 SUITE 1116
 PAPIILLION, NE 68046
 Phone: 402-593-4476

Prepared by:
 Michael Noon
 OMAHA TRUCK CENTER, INC.
 10710 I STREET
 OMAHA, NE 68127
 Phone: 402-592-0440

DIMENSIONS

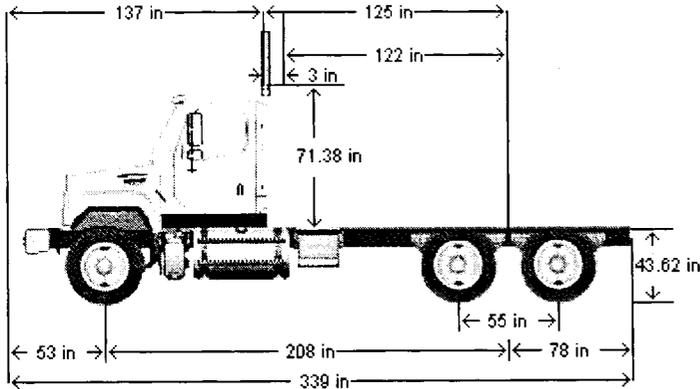

VEHICLE SPECIFICATIONS SUMMARY - DIMENSIONS

Model.....	114SD
Wheelbase (545).....	5275MM (208 INCH) WHEELBASE
Rear Frame Overhang (552).....	1975MM (78 INCH) REAR FRAME OVERHANG
Fifth Wheel (578).....	NO FIFTH WHEEL
Mounting Location (577).....	NO FIFTH WHEEL LOCATION
Maximum Forward Position (in).....	0
Maximum Rearward Position (in).....	0
Amount of Slide Travel (in).....	0
Slide Increment (in).....	0
Desired Slide Position (in).....	0.0
Cab Size (829).....	114 INCH BBC FLAT ROOF ALUMINUM CONVENTIONAL CAB
Sleeper (682).....	NO SLEEPER BOX/SLEEPER CAB
Exhaust System (016).....	RH OUTBOARD UNDER STEP MOUNTED HORIZONTAL AFTERTREATMENT SYSTEM ASSEMBLY WITH RH B-PILLAR MOUNTED VERTICAL TAILPIPE

TABLE SUMMARY - DIMENSIONS



Prepared for:
 DEB HOUGHTALING
 SARPY COUNTY
 1210 GOLDEN GATE DRIVE
 SUITE 1116
 PAILLION, NE 68046
 Phone: 402-593-4476

Prepared by:
 Michael Noon
 OMAHA TRUCK CENTER, INC.
 10710 I STREET
 OMAHA, NE 68127
 Phone: 402-592-0440

Bumper to Back of Cab (BBC)	137.0
Bumper to Centerline of Front Axle (BA)	53.5
Min. Cab to Body Clearance (CB)	3.0
Back of Cab to Centerline of Rear Axle(s) (CA)	124.5
Effective Back of Cab to Centerline of Rear Axle(s) (Effective CA)	121.5
Back of Cab Protrusions (Exhaust/Intake) (CP)	1.5
Back of Cab Protrusions (Side Extenders/Trim Tab) (CP)	0.0
Back of Cab Clearance (CL)	3.0
Back of Cab to End of Frame	202.5
Cab Height (CH)	71.4
Wheelbase (WB)	208.0
Frame Overhang (OH)	78.0
Overall Length (OAL)	339.5
Rear Axle Spacing	55.0
Unladen Frame Height at Centerline of Rear Axle	43.6

Performance calculations are estimates only. If performance calculations are critical, please contact Customer Application Engineering.

Freightliner (FTL)



Run Smart

Freightliner Level II

Level II Coverage is not available for vehicles in these vocations:		Mining
Category Determinants		Models with Limitations
Road Surface— most severe in-transit between sites	Up to 30% off-highway Rough, maintained concrete/asphalt; maintained gravel/crushed rock; maintained dirt or soft soil	Up to 10% off-highway Columbia, Century, or Coronado Rough maintained concrete/asphalt; maintained gravel/crushed rock
GCW	140,000 lb/63 505 kg or less Doubles on NY turnpikes are rated 143,000 lb Doubles on FL turnpikes are rated 147,000 lb	
Axles and Their Manufacturer's GVW Rating		
	2-axle unit	46,000 lb/20 865 kg or less
	3-axle unit	66,000 lb/29 937 kg or less
	4-axle unit	86,000 lb/39 008 kg or less
	5 axles or more	98,000 lb/44 452 kg or less
Coverage		
Description	Time ¹	Distance ¹
Basic Vehicle	1 Year	100,000 mi/161 000 km
Battery	1 Year	100,000 mi/161 000 km
Brightwork	6 Months	Unlimited
Cab Corrosion/Perforation	5 Years	Unlimited
Cab Structure	3 Years	150,000 mi/241 000 km
Chassis Paint	6 Months	Unlimited
Corrosion	6 Months	Unlimited
Crossmembers	5 Years	300,000 mi/483 000 km
Drivetrain	2 Years	100,000 mi/161 000 km
Frame Rails	5 Years	300,000 mi/483 000 km
Paint	1 Year	100,000 mi/161 000 km

¹Time or distance, whichever comes first

Warranty Statement & Warranty Coverage Descriptions follow on page two of this document.

The information provided in this document is for general information only and is not offered as customer's warranty.

This coverage may be superseded without notification.

Copyright © Daimler Trucks North America LLC. All rights reserved. Daimler Trucks North America LLC is a Daimler company.

Warranty Statement

1.00 NEW VEHICLE COVERAGE

The following section outlines Company standard warranty coverages for all Company vehicles, apparatus or chassis or cabs sold and domiciled in the USA (50 states and Washington, D.C.), Puerto Rico, and Canada. This information is also included in the Operator's Maintenance and Owner's Warranty Information Booklet.

1.01 NEW VEHICLE LIMITED WARRANTY

Under this New Vehicle Limited Warranty ("Warranty"), Company warrants that each new vehicle will be free from defects in material and workmanship that occur under normal use within the applicable warranty period, subject to certain limitations and exclusions as specified in this document.

This Warranty covers all components and parts unless specifically covered by other warranties or otherwise excluded by this document.

1.02 LIMITATIONS

This Warranty does not apply to vehicles that are sold or domiciled outside of the United States (50 states and Washington, D.C.), Puerto Rico, or Canada.

This Warranty does not apply to engines, Allison or Twin Disc transmissions, tires, or other components or parts that are not manufactured by Company and that are warranted directly by their respective manufacturers. With respect to the foregoing, Company makes no warranty whether express, implied, statutory or otherwise including, but not limited to, any warranty of merchantability or fitness for a particular purpose.

THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES OF ANY KIND WHETHER WRITTEN, ORAL, OR IMPLIED INCLUDING, BUT NOT LIMITED TO ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. THIS WARRANTY SPECIFICALLY EXCLUDES ANY OTHER WARRANTIES OR CONDITIONS PROVIDED FOR BY LAW, WHETHER STATUTORY OR OTHERWISE.

COMPANY'S SOLE OBLIGATION UNDER THIS WARRANTY SHALL BE TO REPAIR OR REPLACE, IN COMPANY'S SOLE DISCRETION, ANY DEFECTIVE COMPONENT OR PART. SUCH REPAIR OR REPLACEMENT SHALL BE WITHOUT COST TO PURCHASER WHEN PERFORMED WITHIN THE APPLICABLE WARRANTY PERIOD (TIME, DISTANCE, OR HOUR LIMIT, WHICHEVER OCCURS FIRST).

Purchaser must notify Company within the applicable warranty period, of any failure of the vehicle to comply with this Warranty and Purchaser must, at Purchaser's expense, promptly return the vehicle to an authorized Dealer for inspection and repair or replacement of any defect in material or workmanship occurring within the applicable warranty period.

The vehicle must be maintained and serviced according to the prescribed schedules outlined in the Driver's/Operator's and Maintenance Manuals. Receipted bills and other evidence that required maintenance and service have been performed are required by Company as a condition of this Warranty.

After the Company's obligations under this Warranty expire, all liabilities of Company to Purchaser under this Warranty shall terminate. Repairs made under this Warranty do not constitute an extension of the original Warranty period for the vehicle or for any specific component or part.

To the extent that any provision of this Warranty contravenes the law of any jurisdiction, such provision shall be inapplicable in such jurisdiction, and the remainder of the warranty shall not be affected.

1.03 PURCHASER'S EXCLUSIVE REMEDY

THIS WARRANTY SHALL BE THE PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST COMPANY, WHETHER IN CONTRACT, UNDER STATUTE (INCLUDING STATUTORY PROVISIONS AS TO QUALITY OR FITNESS FOR ANY PARTICULAR PURPOSE OF GOODS SUPPLIED PURSUANT TO THE CONTRACT OF SALE), WARRANTY, TORT, STRICT LIABILITY, OR ANY OTHER LEGAL THEORY.

1.04 LIMITATION OF LIABILITY

COMPANY'S LIABILITY UNDER THIS WARRANTY IS LIMITED TO THE COST TO REPAIR OR REPLACE, IN COMPANY'S SOLE DISCRETION, THE DEFECTIVE COMPONENT OR PART THAT IN NO EVENT SHALL EXCEED THE FAIR MARKET VALUE OF THE VEHICLE AT THE TIME THE DEFECT IS DISCOVERED.

IN NO EVENT SHALL COMPANY BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES INCLUDING, BUT NOT LIMITED TO, INJURIES TO PERSONS OR DAMAGE TO PROPERTY, LOSS OF PROFITS OR ANTICIPATED PROFITS, OR LOSS OF VEHICLE USE.

Coverage Descriptions

Axles

Coverage includes all factory-installed steer axles, drive axles; tag axles; and pusher axles. *Excludes any axle installed by a dealer or body builder.*

Drive Axle(s)

Coverage includes axle housing, carrier assembly, differential assembly, power divider, axle shafts, and gaskets and seals. *Excludes suspension and torque rod brackets, tie rod ends, wheel end equipment, wiring, yokes, and attaching hardware.*

Pusher Axle

A pusher axle is a non-driven, weight-bearing axle that can be raised when not required to bear a portion of the load. Since the pusher axle can be of many different configurations, warranty coverage includes all components included in the individual build specification of each individual application.

Steer Axle

Coverage includes I-beam, steering knuckles, differential on drive steer axle, spindles, kingpins, kingpin bearings and steering arms. *Excludes wheel end equipment, tie rod ends, steering linkage components, kingpin bushings, and king pin seals.*

Tag Axle

A tag axle is a non-driven, continuous weight-bearing axle. Since the tag axle can be of many different configurations, warranty coverage includes all components included in the individual build specification of each individual application.

Battery

Only Freightliner LLC's private brand-label (Alliance Brand Parts), Mopar (Sterling Bullet only), and Furukawa (STL360 Model only) batteries will be warranted. *Any other brand of battery is excluded from Company coverage. Claims for all other brands must be submitted directly to the supplier. Warranty coverage includes the battery assembly only.*

Basic Body

Coverage includes body emergency lighting and controls; hinged and rollup compartment doors; body trim; body lighting and controls; body electrical systems.

Basic Chassis

Coverage includes all factory-installed components of the vehicle/chassis that are not excluded elsewhere in the warranty, or by special agreement or described as having a different time, or distance or hours, or listed separately on each new vehicle warranty coverage chart.

Basic Vehicle

Coverage includes all factory-installed components of the vehicle/chassis that are not excluded elsewhere in the warranty, or by special agreement or described as having a different time or distance, or listed separately on each new vehicle warranty coverage chart.

Body Electrical

Coverage includes body wiring harness(es) only.

Body Structure

Coverage includes compartments and body panels; hinged compartment doors; fire pump closure; body frame and sub-frame, if applicable. *Excludes surface corrosion caused by chips or scratches.*

Body Structure and Corrosion

Coverage includes compartments and body panels; hinged compartment doors; fire pump closure; body frame and sub-frame, if applicable. *Excludes surface corrosion caused by chips or scratches.*

Brightwork

Coverage includes all factory-installed components with chrome, polished aluminum, or polished stainless steel surfaces. *Excludes any damage to bumper, backside of bumpers, and concealed or inner surfaces.*

Cab Corrosion/Perforation

Coverage is limited to rust-through or perforation of the cab and integral sleeper structure and sleeper box (if applicable) due to corrosion from within. *Excludes all conditions of rust or corrosion that has not resulted in rust-through or perforation as well as surface rust or corrosion caused by non-adhesion. Excludes any damage to the paint such as chips or scratches.*

Cab Structure

Coverage includes cab and integral sleeper structural components, structural components of factory installed sleeper boxes (if applicable), sheet metal panels, doors, and hoods. *Excludes all bolt-on components including door and hood hinges, latches, guides, and other mounting hardware.*

Corrosion

Coverage provides warranty against corrosion to any metal or metal alloy part of the vehicle. Rust or corrosion to specific components and/or caused by certain conditions are excluded from all Company warranty coverage and will not be paid under Basic Vehicle, Cab Structure, Cab Corrosion, or Aftermarket Parts Warranty.

Exclusions to corrosion warranty include, but are not limited to, the following:

- Corrosion caused by general rust (for example, rust on the unfinished backside of a bumper)
- Surface rust caused by chips or scratches in the paint or chrome surfaces
- Corrosion caused by high-pressure washing, severe wash solutions, cleaning solvents, detergents, compounds
- Corrosion caused by salinity in the environment or corrosive salts and/or chemicals used on the road surface.
- Corrosion caused by acid rain or other industrial fallout
- Corrosion due to improper prevention measures during storage or use

- Corrosion or rust on tone rings, rotors or drums (rotor exclusion does not apply to hydraulic discs with Magna-Coat Rotors)

- Corrosion due to environmental damage (including ocean spray); airborne fallout (includes chemicals, tree sap, etc.), or other atmospheric conditions or other acts of nature

- Corrosion due to improper use, misuse or abuse, negligence, including improper or insufficient maintenance

Cowl Corrosion/Perforation

Coverage is limited to rust-through or perforation of the cowl due to corrosion from within. *Excludes all conditions of rust or corrosion that have not resulted in rust-through or perforation as well as surface rust or corrosion caused by non-adhesion. Excludes any damage to the paint such as chips or scratches.*

Cowl Structure

Coverage includes cowl structural components, sheet metal panels, and hood. *Excludes all bolt-on components including hood hinges, latches, guides, or other mounting hardware.*

Crossmembers

Coverage includes crossmembers, gussets, and huck-mounting bolts that attach gussets to crossmembers and gussets/crossmembers to frame rails. *Excludes any bolt-on item attached with either conventional or huck bolts.*

Driveline

Coverage includes driveshaft tubing, U-joints, yokes, support bearings, and splines.

Drivetrain

Coverage includes transmission, (except Allison transmissions) steer axle(s), drive axle(s), and transfer case. *Excludes tag axle(s), pusher axle(s), driveline, and U-joints.*

Frame Rails

Coverage is limited to breaking or cracking of factory installed frame rails, frame rail liners, frame rail extensions, and any item(s) factory welded to them. *Excludes all bolt-on items regardless if attached with conventional or huck bolts.*

Glider

An incomplete vehicle which may be ordered with or without engine and/or major drive train components; warranty coverage includes all components as specified in the specific build specification.

Off Road On-Site Assistance

Coverage is exclusively available for off road vehicles that are prohibited from use on public streets. If this coverage is provided, it will be specifically included in the coverage table as a separate category. Coverage includes on-site assistance and/or equipment transportation to the nearest authorized repairing location for a Daimler Trucks North America LLC warrantable repair.

Paint (Body, Cab, & Cowl)

Paint coverage excludes lack-of gloss issues on vehicles painted with low gloss colors; the underside of hoods and roof and side mounted air fairings; and any damages to the paint or painted surface such as chips and scratches.

Body Paint

Coverage includes all factory-painted exterior body surfaces. Warranted against orange peel; peeling/delaminating; cracking or checking; or loss of gloss due to cracking, checking or hazing.

Cab Paint

Coverage includes all factory-painted exterior surfaces (except those included in chassis paint coverage). Warranted against orange peel, peeling or delaminating; cracking or checking; or loss of gloss due to cracking, checking or hazing.

Cowl Paint

Coverage includes all factory-painted exterior surfaces of cowl structure (except those included in chassis paint). Warranted against orange peel; peeling or delaminating; cracking or checking; or loss of gloss due to cracking, checking or hazing.

Paint, Chassis (Chassis Paint)

Coverage includes all factory painted surfaces on frame rails, crossmembers/gussets, front and rear bumpers, suspension components, power train components, drivelines, fuel tanks, air tanks, wheel end equipment, tool boxes, battery boxes, access steps, and attaching brackets and hardware. Warranted against peeling or non-adhesion. *Excludes U-joints and any damages to the paint or painted surface such as chips and scratches.*

Towing/Roadside Assistance

Coverage includes roadside assistance or towing (to the nearest authorized repair location) for a Daimler Trucks North America LLC warrantable repair in a vehicle-down situation that prevents the safe and lawful operation of the vehicle. If this coverage is provided, it will be specifically included in the coverage table as a separate category.

Transfer Case Assembly

Coverage includes housing and all internally lubricated parts.

Transmission

Coverage includes housing and all internally lubricated parts, electric/air shift/control units, valves, gaskets, and seals. Excludes broken synchronizer pins, PTOs, transfer case(s), airlines, gauge senders, yoke(s), clutch and clutch control components including clutch brake. *Excludes Allison automatic transmissions and Twin Disc Automatic Transmissions.*

Wheel End Equipment

Coverage includes brake components, wheels, hubs, drums, rotors, wheel seals/ bearings, slack adjusters, and attaching hardware.



DETROIT
EXTENDED SERVICE COVERAGE

POWERTRAIN SERVICE COVERAGE FOR VOCATIONAL TRUCKS



VOCATIONAL

When you run Detroit engines and axles, you know durability comes standard. All of our engines and components come with a comprehensive standard warranty coverage package featuring expedited parts and service for critical downtime situations. Even better, our fast, hassle-free process will get you running and back to work in no time. And if you'd like even greater coverage, see our extended warranty options below.

ENGINE

Engine: 2 years / Unlimited miles
Includes parts and labor

Injectors: 2 years / 200,000 miles
Includes parts and labor

Major components: 5 years / 500,000 miles

No charge on parts

Pays 100% of service outlet's normal charge

FRONT AXLES

3 years / 300,000 miles
2 years / Unlimited miles for M2 models

100% warranty coverage of all knuckle parts, including the kingpin

Covers I-beam, steering knuckles, spindles, kingpins, kingpin bearings and steering arms


Covers progressive damage

REAR AXLES

3 years / 300,000 miles
2 years / Unlimited miles for M2 models

Covers axle housing, carrier assembly, inter-axle differential, axle shafts, gaskets and seals

With an Extended Service Coverage package, Detroit has your back for a very long time. Nearly every component on your DD13, DD15 TC or DD16 engine is covered by one of our comprehensive packages listed on the following page. Plus, your truck will be serviced by factory-trained technicians using Detroit genuine parts, so you know you'll always be getting the best. That's just how we do things around here.

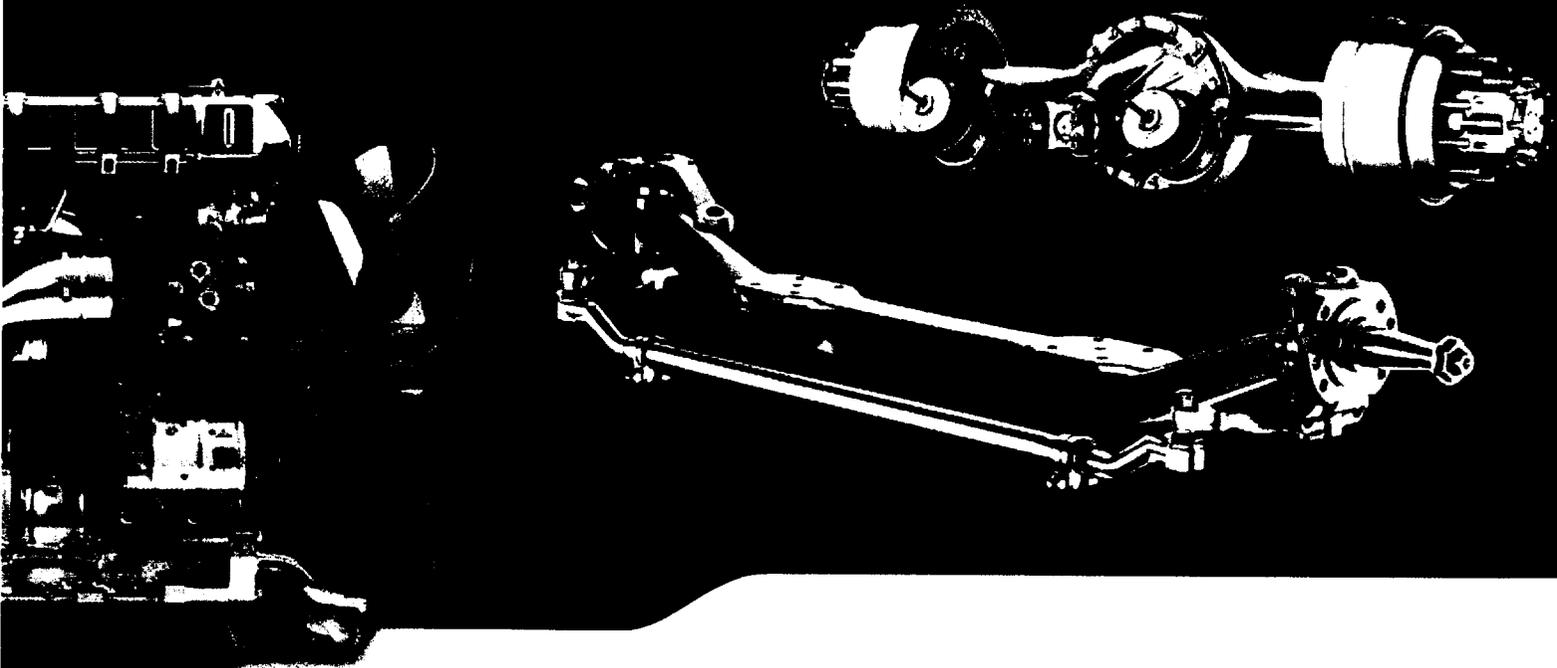



DETROIT
EXTENDED SERVICE COVERAGE

EXTENDED SERVICE COVERAGE

All over the U.S. or Canada, you'll find Detroit-certified service locations staffed with factory-trained technicians who are experts in Detroit products.


Our service locations use only OEM parts to ensure the highest quality, fit and finish for your truck.

You deal directly with Detroit, not a disinterested third party, so you know you're getting qualified service.

Control unexpected major repair costs which can affect operational efficiency.

Daimler Trucks North America created the Aftermarket Service Products line specifically to help your business stay as profitable as possible. Our flexible extended service coverage (ESC) options are designed to keep your trucks on the road longer and your business in the black by protecting you against unexpected downtime and repair costs. Find out more at our website. www.aftermarketserviceproducts.com.

DDC-EMC-BRO-0073-0713. Specifications are subject to change without notice. Detroit Diesel Corporation is registered to ISO 9001:2008. Copyright © Detroit Diesel Corporation. All rights reserved. Detroit™ is a brand of Detroit Diesel Corporation, a subsidiary of Daimler Trucks North America LLC, a Daimler company.

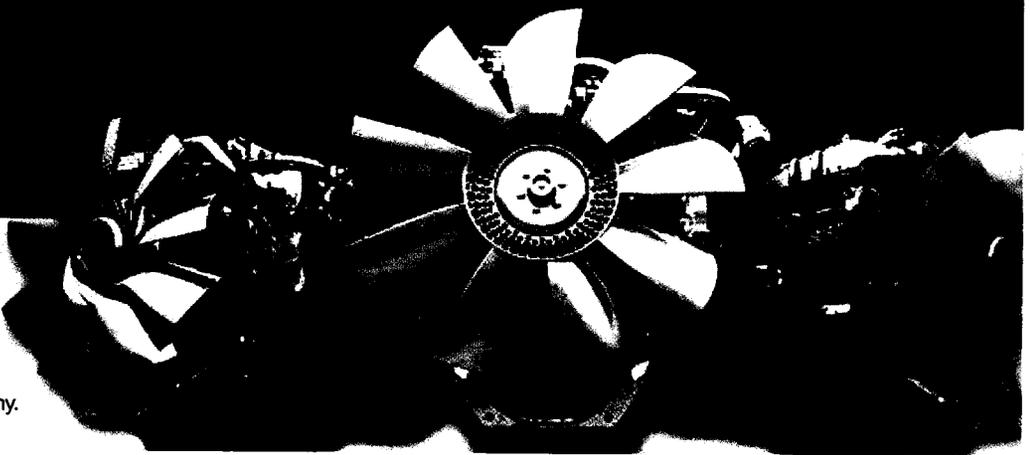



DETROIT
EXTENDED SERVICE COVERAGE

EXTENDED SERVICE COVERAGE

Choose the warranty package, along with the right mix of year and mileage coverage, to fit your business and budget.

EW1

Air Inlet Manifold	Cylinder Head Gasket	Integrated Engine Brake	Thermostat Housing & Gasket
Air Intake Throttle Valve	Cylinder Liner	Low Pressure Fuel Pump	Turbo Compound Device & Coupling
Alternator Bracket*	EGR System	Main Bearing Bolts	Turbocharger Outlet Elbow
Belt Tensioner	Engine-Mounted Sensors	Main Bearings	Valves (exhaust, intake)
Camshaft Assembly (including seals)	Exhaust Manifold & Bellows	MCM/CPC	Valve Springs, Guides, Inserts
Cold Pipe Assembly	Fan Support Assembly	Oil Cooler, Housing & Gaskets	Vibration Damper
Connecting Rod, Bearings & Bolts	Flywheel, Housing & Gasket	Oil Pan & Seals	Water Pump (excludes water pump seal)
Cooler Inlet Pipe	Fuel Filter Housing	Oil Press REG & Relief Valves	
Crankcase Breather Oil Separator	Gear Case	Oil Pump	
Crankshaft Thrust Washer	Gear Train	Pistons (rings, pins, retainers)	
Cylinder Block	Gear Train/Timing Case Gasket	Rocker Arm Assembly	
Cylinder Head Assembly	High Pressure Fuel System & Lines	Rocker Cover & Seals	

EW2

EVERYTHING IN EW1, PLUS:

Air Compressor**	Turbocharger
Fuel Injectors	Water Pump Seal

EW3

EVERYTHING IN EW2, PLUS:

Electrical Harness & Connectors	Aftertreatment Temperature Sensors	Hydrocarbon Fuel Line
Seals - Front & Rear Crankshaft	Aftertreatment Control Module	Hydrocarbon Injection Valve
Aftertreatment Nox Sensors	DEF Pump/Metering Unit/Injection Unit	Hydrocarbon Metering Unit
Aftertreatment Pressure Sensors		

EW4

EVERYTHING IN EW3, PLUS:

Aftertreatment System Mounting Brackets & Clamps	Diesel Particulate Filter & Housing
Diesel Oxidation Catalyst & Housing	SCR Catalyst & Housing

**5 YEARS
OR 200K MILES**

**7 YEARS
OR 250K MILES**

* If supplied by DDC
** Air Compressor for GHG14 covered under EW2 package. EPA 10 covered under EW3 package

Have a second owner prospect? Don't worry!
Give them added value with the fully transferable
extended service coverage.

Roll the cost of the extended service directly into the monthly
payments for your truck. For just a few extra dollars a day, you
get long-term peace of mind the moment you hit the road.