

BOARD OF COMMISSIONERS
SARPY COUNTY, NEBRASKA
RESOLUTION AWARDING BID FOR STAINLESS STEEL MATERIAL SPREADERS FOR THE
PUBLIC WORKS DEPARTMENT

WHEREAS, pursuant to Neb. Rev. Stat. §23-104(6)(Reissue 2012), the County has the power to do all acts in relation to the concerns of the County necessary to the exercise of its corporate powers; and,

WHEREAS, pursuant to Neb. Rev. Stat. §23-103 (Reissue 2012), the powers of the County as a body are exercised by the County Board; and,

WHEREAS, bids for the stainless steel material spreaders have been solicited, made, opened and reviewed pursuant to applicable Nebraska State Statutes; and,


WHEREAS, based on those proceedings, and after a public hearing, this Board has duly deliberated and considered the bids received; and,

WHEREAS, this Board desires to proceed forthwith in order to expedite and facilitate service to the citizens of Sarpy County.

NOW, THEREFORE, BE IT RESOLVED BY THIS BOARD OF COUNTY COMMISSIONERS THAT:


- (1) Based upon the recommendation of the Purchasing Department, and upon a comparison of the bids to the bid specifications, the bid is hereby awarded to the lowest responsible bidder Palfleet Truck Equipment for Two (2) 2014 Stainless Steel Material Spreaders in the amount of Fifty Three Thousand Seven Hundred Seventy Eight Dollars and No Cents (\$53,778.00) is accepted, ratified, and confirmed.
- (2) This Board's Chairman, Clerk, and Attorney are hereby authorized and directed to execute such ancillary documents as may be required to evidence the contract and take any and all steps necessary or required in order to carry out the terms of such contract after said documents have been reviewed by the Attorney, Fiscal Administrator, and County Administrator.

The above resolution was approved by a vote of the Sarpy County Board of Commissioners at a public meeting duly held in accordance with applicable law on the 8th day of July, 2014.

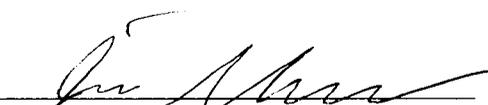
Sarpy County Board Chairman



TEST:

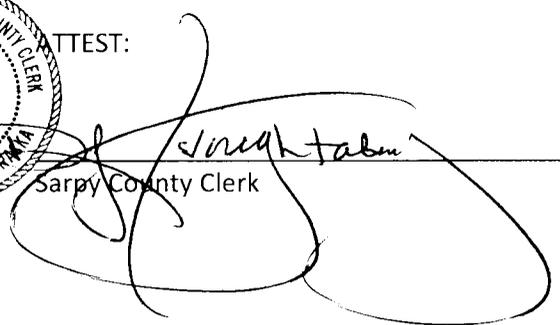
Sarpy County Clerk

SEAL

Sarpy County Purchasing Department

SARPY COUNTY COURTHOUSE
1210 GOLDEN GATE DRIVE SUITE 1220
PAPILLION, NE 68046



Brian Hanson, Purchasing Agent
(402) 593-2349
Debby Peoples, Asst. Purchasing Agent
(402) 593-4164
Beth Garber, Senior Buyer/Contract Administrator
(402) 593-4476
Lois Spethman, Supply Clerk/Purchaser
(402) 593-2102

MEMO

To: Sarpy County Board of Commissioners
From: Beth Garber
Re: Bid Award – Stainless Steel Material Spreaders

On June 20, 2014 one (1) bid from Palfleet Truck Equipment was opened for the Stainless Steel Material Spreaders for the Public Works Department. The Public Works Department has seven (7) of the proposed units in service, all performing well. Therefore, it is recommended the bid be awarded to the low bid, Palfleet Truck Equipment for \$53,778.00.

In 2013 the County received two (2) bids for the spreaders with the bid being awarded to the lowest responsible bidder (\$49,700.00) of Palfleet Truck Equipment. I anticipated bids from several other companies; however when I contacted them after the bid opening they determined their current schedule was too busy to properly bid the project or felt their product could not properly meet our specifications. Within the next few weeks George Funderburk and I will be meeting to discuss future specifications and bidding. Our goal is to have final specifications that are specific enough to meet Sarpy County expectations but general enough to allow multiple vendors the opportunity to participate in the bidding process.

If you have any questions, please let me know.

June 25, 2014

Beth Garber

cc: Deb Houghtaling
Mark Wayne
Scott Bovick
Brian Hanson
George Funderburk
Rich Weber

SARPY COUNTY

FLEET SERVICE DEPARTMENT

15100 SOUTH 84TH STREET
PAPILLION, NE 68046
Phone 402-537-6980
FAX 402-537-6999

FLEET MANAGER
George Funderburk
gfunderburk@sarpy.com

Date: June 25, 2014

To: Beth Garber
From: George Funderburk
Ref: Highway Stainless Steel Material Spreaders Bid

I have reviewed the Public Works Stainless Steel Material Spreader Bid. I would recommend that we purchase the Bid from Palfleet Truck Equipment Company for 2 (two) 2014 Highway Model E2020Xt Stainless Steel Material Spreaders with pre-wet system for the total price of \$53,778.00.

Currently Public Works has 7 units in service, all of which are performing as expected. Adding 2 (two) more units will simplify training and repairs for operators and mechanics.

Any questions please call: 402-537-6980

CC: Rich Weber

Stainless Steel Material Spreaders
for the
Sarpy County Public Works Department

Bid Opening:
2:00 P.M., Thursday,
June 19, 2014

	Palfleet Truck Equipment
Unit Price	\$26,889.00
Extended Price	\$53,778.00
Make	Hi-Way
Model	E2020XT
Year	2014
Delivery Date	November/December

Sarpy County, Nebraska
Two (2) STAINLESS STEEL MATERIAL SPREADERS
Bid Form

Company Name: Parifleet Truck Equipment
Make: HI-WAY Model: E2020XT w/ Pne-wet
Year: 2014 system

The undersigned, having carefully examined the specifications and other contract documents for furnishing Two (2) Stainless Steel Material Spreaders. Sanders will be mounted in fourteen (14) foot Dump Bodies with Hydraulic Systems. I hereby propose to furnish equipment as specified for a cost as follows:

UNIT PRICE: \$ 26,889^{w/} EA X 2 = \$ 53,778^{w/}

*Prices are to be F.O.B. - 15100 South 84th Street, Papillion, NE 68046

DELIVERY DATE: November/Dec A.R.O

Company Information:

Years in business: 40

Number of employees: 20

Total sales last 3 years: 15 Million

References:

Company Name: City of Omaha Fleet Management
Address: 2606 N 26th ST Omaha, NE 68111
Contact Name & Title: John Wesley
Phone Number: (402) 444-5402
Fax Number: _____

Company Name: City of Council Bluffs
Address: 206 Pearl St CB, Iowa 51503
Contact Name & Title: Dave McDermitt
Phone Number: 712-328-4607
Fax Number: _____

Company Name: M.U.D
Address: 3100 S. 61st Ave Omaha, NE, 68106
Contact Name & Title: Steve Stezak
Phone Number: 402-554-7854
Fax Number: _____

I certify that this bid is submitted in accordance with the specifications issued by Sarpy County.

I acknowledge receipt of the following addenda (if applicable):

Addendum #1 yes (✓)

Addendum #2 _____

Attachments: Literature - 1 set
Warranty Information

Paifleet Truck Equipment
Company Name (please print)

Kevin Miniro
Company Representative

Kevin Miniro
Authorized Signature

712-323-7116
Telephone Number

2109 S. 35th ST.
Address

712-325-1771
Fax Number

CB, Iowa, 51501
City, State & Zip

K.miniro@Paifleet.com
E-Mail Address

***NOTE: Sarpy County is tax exempt and will provide the proper form upon request.**

HI-WAY LIMITED WARRANTY

BASIC WARRANTY

HIGHWAY EQUIPMENT COMPANY ("Highway") has manufactured or is distributing the Product/Genuine Parts to which this warranty is attached, and warrants to its original reseller including Dealers, Distributors and Original Equipment Manufacturers (hereafter called Dealer) that the Product/Genuine Parts will, under normal conditions of use and service, be free from material defects due to faulty manufacturing for a period of six (6) months from the date of delivery to the original user. For any Product/Genuine Part that does not conform to the aforesaid warranty within six (6) months from the date of delivery to the original user, your Dealer will, at its option, repair or replace parts. Labor costs for this basic warranty coverage will be paid by Highway to the Dealer at their standard shop rate, based on the amount of time Highway establishes to be the time reasonably necessary to make required repairs. If the Product/Genuine Part is defective in materials or workmanship, you must promptly notify your Dealer; and complete the warranty registration by utilizing the internet at <http://dealer.highwayequipment.com> for such Product before the expiration of the warranty period (Genuine Parts do not require a warranty registration but may require proof of purchase). If your Dealer determines that the defect is due to Highway's material or workmanship, your Dealer will, with Highway's consent, repair such defect during normal working hours, at their location, or such other location as the Dealer may designate. The installation of any part that did not originate from Highway will void this Basic Warranty in its entirety. In the event of repair or replacement, the warranty period shall not be extended beyond the original warranty period.

EXTENDED WARRANTY

In lieu of the basic warranty described above, if the warranty registration (or warranty information as provided above) is received at Highway within thirty (30) days after the date of delivery to the original user, Highway will warrant that the Product will, under normal conditions of use and service, be free from material defects due to faulty manufacturing for a period of thirteen (13) months from the date of delivery to the original user. For any Product that does not conform to the aforesaid warranty within thirteen (13) months from the date of delivery, your Dealer will, at its option, send you a new part, or give you full credit for the part, provided the replacement part is purchased through your Dealer. Labor costs for this extended warranty coverage will be paid by Highway to the Dealer at their standard shop rate, based on the amount of time Highway establishes to be the time reasonably necessary to make required repairs. If the Product is defective in materials or workmanship, you must promptly notify your Dealer before the expiration of the warranty period. If your Dealer determines that the defect is due to Highway's material or workmanship, your Dealer will, with Highway's consent, repair such defect during normal working hours, at their location, or such other location as your Dealer may designate. In the event of repair or replacement, the warranty period shall not be extended beyond the original warranty period.

Genuine Parts are covered by the Basic Warranty and are not eligible for the Extended Warranty.

If you fail to complete the warranty registration (or warranty information as provided above) to Highway within thirty (30) days after the date of delivery, this extended warranty shall not apply, and your sole remedy for any defects in the Product shall be under the basic warranty described above.

The above warranties do not cover:

- (1) Product that is damaged by abuse, neglect, accident, or modification;
- (2) fluids, towing, telephone, travel and cleaning cost;
- (3) loss of use of vehicle, inconvenience, commercial loss, or consequential damages;
- (4) any product, component, or part not manufactured by Highway; or
- (5) the Product itself if parts are installed on the Product that did not originate from Highway.

The above warranties do not apply under the following conditions:

- (1) when Product has been improperly used or installed, or modified, or fitted with sideboards, or fails because of defects or inefficiency of components not furnished with the Product;
- (2) when Product is used for purposes for which it was not originally designed or intended;
- (3) when Product is used under abnormal operating conditions; or
- (4) when the dealer or user fails to follow Highway instructions regarding the Product, including the instruction to install only Highway-supplied parts onto the Product.

HIGHWAY WILL BEAR NO OTHER EXPENSE, INCLUDING BUT NOT LIMITED TO LABOR AND MATERIAL COSTS (OTHER THAN THOSE SPECIFIED HEREIN) OF ANY KIND, AND YOUR EXCLUSIVE REMEDY, IN LIEU OF ALL INCIDENTAL, SPECIAL, CONSEQUENTIAL OR ANY OTHER DAMAGES, INCLUDING, BUT NOT LIMITED TO, DAMAGES FOR NEGLIGENCE, IS LIMITED TO REPAIR OR REPLACEMENT AS HERETOFORE DESCRIBED. THE FOREGOING WARRANTIES ARE IN LIEU OF ALL OTHER REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED OF ANY KIND REGARDING ANY PRODUCT, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE OR USE. IN NO CASE SHALL HIGHWAY BE LIABLE FOR ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES BASED UPON BREACH OF WARRANTY, BREACH OF CONTRACT, NEGLIGENCE, STRICT TORT, OR ANY OTHER LEGAL THEORY.

Unless modified in writing, signed by both parties, this Limited Warranty is understood to be the complete and exclusive agreement between the parties, superseding all prior agreements, oral or written, and all other communications between the parties relating to the subject matter of this Limited Warranty. No representative or agent of Highway nor any third party has authority to change or modify this warranty in any respect, nor to assume any other obligation or liability on behalf of Highway. Any action for breach of warranty must be commenced within six (6) months following the expiration of the Limited Warranty.

These warranties are extended only to the original Dealer and are not transferable. In the event of a warranty claim, you should promptly notify your Dealer, and provide the following:

1. Model and serial number of the Product;
2. Date of delivery to the original user;
3. Part number of the defective part;
4. Description of the difficulty encountered;
5. Date of repair.

Highway will work with your Dealer regarding instructions for repair, replacement, or refund, if the warranty claim can be validated.

Effective with Product delivered to original user on or after September 20, 2010.

**Acknowledgement of Receipt
for the
Two (2) Stainless Steel Material Spreaders Specifications**

Please take a moment to acknowledge receipt of the attached bid documents. Your compliance with this request will assist us in maintaining proper bid follow-up procedures while ensuring that all vendors have the opportunity to bid.

Date Specifications Released: May 23, 2014

Date Specifications Received: 5-20-14

Do You Plan on Submitting a Proposal? YES NO

If no, please explain:

Company Information:

Company Name Palfleet Truck Equipment

Address 2109 s.35th st

City, State, Zip Council Bluffs , Iowa ,51501

Phone/Fax 712-323-7116 712-325-1771

Email Address k.minino@palfleet.com

Received By Kevin Minino

**Note: Acknowledgements can be faxed or emailed to Beth Garber
at:**

**402-593-4304 (fax)
bgarber@sarpy.com**

**IMPORTANT: DO NOT FAX BIDS
BIDS MUST BE SUBMITTED IN SEALED PACKAGES!**



13' Hi-Way E2020XT – 409 Stainless Steel

13' Length X 82" Wide X 64.5" Height

15" integrated side extensions

11.01 cubic yards struck capacity

Fully welded 10ga hopper and stakes

10ga longsills

#5 straight belt conveyor with slotted floor

6:1 reduction spur gear drive with a hi-torque / low speed hydraulic motor

Fully enclosed spinner hopper with 2 internal deflectors and 4 external baffles

20" diameter hydraulically driven spinner disc with 6 bolt-on hardened fins

Idler grease tubes extended to rear

Idler adjustments extended to rear

Sensor motor for conveyor

304SS feedgate and hardware ILOS

Top mount, direct drive spinner assembly

304SS spinner disc ILOS

Inverted "V" – 304SS – swinging

1/2 cab shield – please specify 57" – 63" – 69"

Hinged screens (2.5 X 2.5 openings)

All components are cleaned with a high pressure Iron phosphate treatment

Body painted with 2 finish coats of Hi-Way yellow plural-component urethane paint

All bolt-on steel components are primed and painted black

All units are topped with a black decal group

Optional Equipment

DBMT kit & tailgate latching devise (HECO standard)

Notes & Exceptions:

- 1) Any orders generated from this quotation that are considered "special" will be non-cancelable once they are released for production. Additional production time may be required. Please consult inside sales for production time prior to order placement.
- 2) Highway Equipment Company's standard warranty shall apply unless otherwise noted.
- 3) Distributor spinner assembly – Spinner disc will turn clockwise
- 4) Screens – Openings will be 2.5" X 2.5"
- 5) Main beam support – Dealer to provide two added support braces
- 6) Hydraulic system & controls – Dealer to provide
- 7) Hydraulic quick disconnect couplers – Dealer to provide
- 8) Paint – Plural-component epoxy primer will be used
- 9) Lights – Dealer to provide
- 10) Working Light – Dealer to provide
- 11) Mounting – Dealer to provide
- 12) Rubber Side Flaps – Dealer to provide rubber side flaps
- 13) Performance of Spreader – We do not recommend spreading anything larger than 1/2" in diameter

Pricing provided on this quote is valid for 30 days. Pricing based on FOB Cedar Rapids, IA.

655-TM-2013

Pal fleet Truck – Sarpy County

6/3/2014

Page 2

Hi-Way HWV150-SOLH Pre-Wet System

Designed to install into existing series hydraulic system of spreader

Two 75-gallon polyethylene tanks (150 gallon system)

Two 5" spin-on vented lids per tank

1.5" quick fill port, 3/4" suction port and 3/4" bypass port

Tanks are equipped with splash proof, positive ventilation devise

9 GPM corrosion resistant positive displacement pump

5 GPM hydraulic motor

Drive components protected in a weather-proof polypropylene housing

Non-corrosive plumbing kit includes: 1-1/2" quick fill port, ball valve shut off, inline -strainer and relief valve

1.5" hose connects both tanks together for equalization and ease of filling

Three brass spray nozzles with in-line check valve

E2020XT mounting bracket kit - dual tanks – 304SS

Low level sensor

Powder coated steel mounting straps

All 304 stainless steel is left unpainted

All non 304 stainless steel bolt-on components are primed and painted black

Optional Equipment**Notes & Exceptions:**

- 1) Any orders generated from this quotation that are considered "special" will be non-cancelable once they are released for production. Additional production time may be required. Please consult inside sales for production time prior to order placement.
- 2) Highway Equipment Company's standard warranty shall apply unless otherwise noted.
- 3) Pre-wet system – Dealer responsible for plumbing oil – 304 stainless steel and galvanized mounting straps and hardware will be provided – low level indicator light not included – Dealer to inspect to insure compatibility


Pricing provided on this quote is valid for 30 days. Pricing based on FOB Cedar Rapids, IA.

Hi-Way E2020XT Heavy-Duty Spreader

The **E2020XT** is the spreader of choice among municipalities for winter deicing. Mounted on a dump body or truck chassis, it features a gearcase assembly that quickly removes for faster service.

Standard Equipment:

- A heavy-duty 10-gauge hopper and stakes with 7-gauge conveyor bottom panel and sills. Stainless steel units are constructed of a 12-gauge hopper and stakes with 10-gauge conveyor bottom panel and sills.
- A 24" (61 cm) wide roller chain conveyor with 3/8" x 1-1/2" (9.5mm x 38mm) crossbars for spreading deicing materials. The conveyor is driven by a 6:1 reduction, 98% efficient spur gear drive with a hi-torque low-speed hydraulic motor.

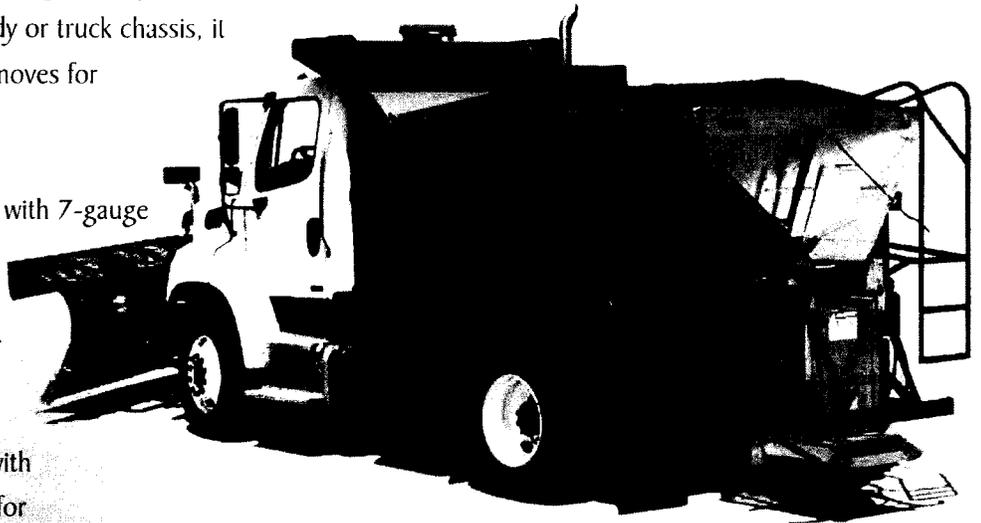

- A heavy-duty height-adjustable hydraulic-drive spinner with two internal deflectors, mounted on a heavy-duty splaner disc including six bolt-on hardened fins and a hydraulic control for the control material application.

Optional Equipment:



- A heavy-duty #4 belt-over-chain, or #5 belt-over-chain conveyor for spreading a variety of materials.
- A heavy-duty hydraulic drive system for spreading a variety of materials.

- An inverted "V" that mounts in a fixed or swinging position to reduce material bridging and protect the conveyor.
- Fenders, mud flaps, cab shield, and screens are just some of the other options available.
- Other popular options: inverted "V", hinged top screens, extended idler adjustment, hinged idler grease tubes.

- Convenient dump body mounting kits for spreading bodies and truck mount kits.



E200

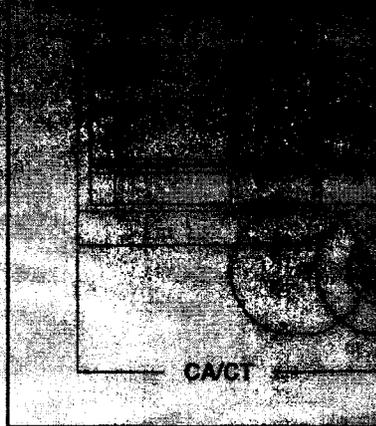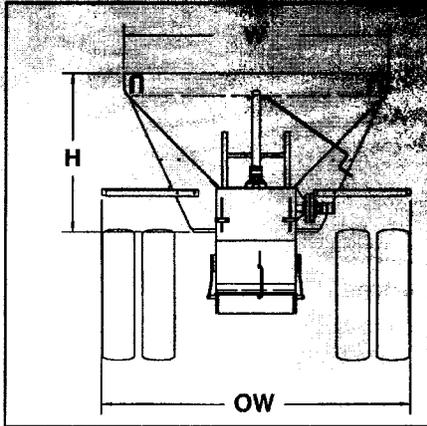

Inside Body Length-BL	Inside Body Width-W	Overall Length-OL	Overall Width-OW (w/fenders)	Height-H	Struck Capacity	Conveyor Width	CA/GT
9' (2.74 m)	82" (208 cm)	130.75" (332 cm)	96" (244 cm)	49.5" (126 cm)	4.7 yds ³ (3.6 m ³)	24" (61 cm)	84" (213 cm)
10' (3.05 m)	82" (208 cm)	142.75" (363 cm)	96" (244 cm)	49.5" (126 cm)	5.2 yds ³ (4.0 m ³)	24" (61 cm)	84" (213 cm)
11' (3.35 m)	82" (208 cm)	154.75" (391 cm)	96" (244 cm)	49.5" (126 cm)	5.8 yds ³ (4.4 m ³)	24" (61 cm)	84" (213 cm)
12' (3.66 m)	82" (208 cm)	166.75" (424 cm)	96" (244 cm)	49.5" (126 cm)	6.3 yds ³ (4.8 m ³)	24" (61 cm)	102" (259 cm)
13' (3.96 m)	82" (208 cm)	178.75" (454 cm)	96" (244 cm)	49.5" (126 cm)	6.9 yds ³ (5.3 m ³)	24" (61 cm)	102" / 108" (259 / 274 cm)
14' (4.27 m)	82" (208 cm)	190.75" (485 cm)	96" (244 cm)	49.5" (126 cm)	7.5 yds ³ (5.7 m ³)	24" (61 cm)	120" (304 cm)
15' (4.57 m)	82" (208 cm)	210.00" (533 cm)	96" (244 cm)	49.5" (126 cm)	8.0 yds ³ (6.1 m ³)	24" (61 cm)	130" (330 cm)
16' (4.88 m)	82" (208 cm)	222.00" (564 cm)	96" (244 cm)	49.5" (126 cm)	8.6 yds ³ (6.6 m ³)	24" (61 cm)	138" (351 cm)

*The Cab to Axle/Tandem dimensions are only guidelines.
Consult federal, state and local weight laws and chassis manufacturer's ratings to ensure neither government weight restrictions, nor GVWR and GAWRs are exceeded.

Spreader Shipping Weight


- 1920 lbs. (871 kg)
- 2020 lbs. (916 kg)
- 2150 lbs. (975 kg)
- 2385 lbs. (1082 kg)
- 2535 lbs. (1150 kg)
- 2675 lbs. (1213 kg)
- 2825 lbs. (1281 kg)
- 2975 lbs. (1349 kg)



Highway Equipment Company
1330 76th Ave. SW • Cedar Rapids, IA 52404-7052
Phone: (319) 363-8281 or (800) 363-1771
Fax: (319) 286-3351 or (800) 363-8267
Online: www.highwayequipment.com
E-mail: information@highwayequipment.com

Products and specifications subject to change without notice. Photos and illustrations may or may not include optional equipment. Hi-Way® is a registered trademark of Highway Equipment Company. Copyright 2011 Highway Equipment Company, Inc. Form No. HII35-2011-06

Hi-Way Pre-Wet Systems

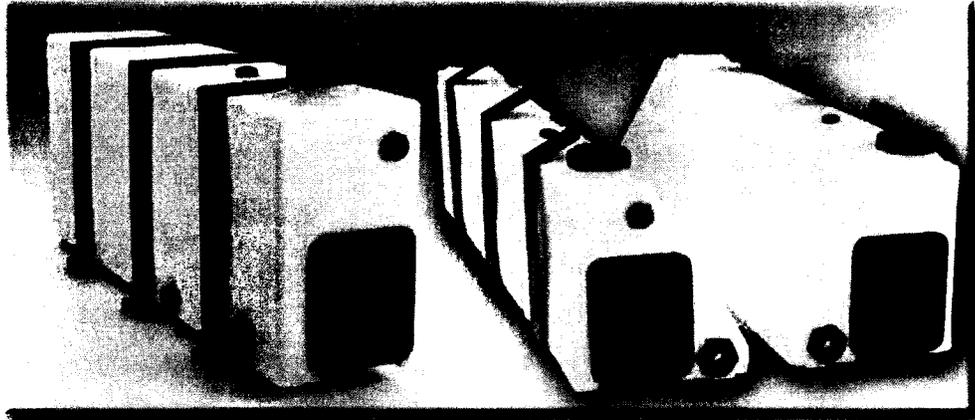


Tailgate
Up to 100 gallon

V-box
Up to 200 gallon

Power Units


Electrical Manual

- 3.3 gpm corrosion resistant diaphragm pump with viton seals and polypropylene housing.
- Manual pressure switches for "ground" and "no ground interrupt."
- 12v controller with harnessing.
- 12v manual override for spreader controls.




Hydraulic Series Loop

- 9 gpm corrosion resistant gear pump.
 - 9 gpm gerotor hydraulic drive motor.
 - Hydraulic series valve with manual on/off, electric on/off or electrical proportional control.
- Used with auger/conveyor exhaust oil.*



Hydraulic Series Loop



Hydraulic Closed Loop


- 9 gpm corrosion resistant positive displacement silver cast roller vane pump.
 - 12 pulse polypropylene rotary flow meter with cabling.
 - 5 gpm gerotor hydraulic drive motor.
- Used with automatic spreader controls.*

• Integrated power units.


• Proportional liquid level sensor available.

Pro


HWV100
HWV200

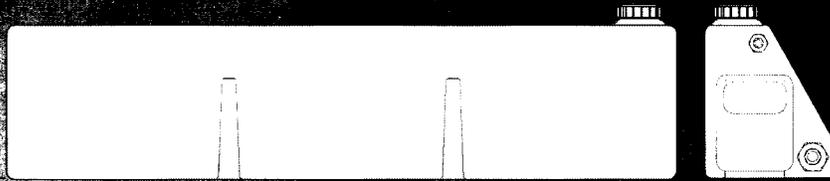

HWV075
HWV150

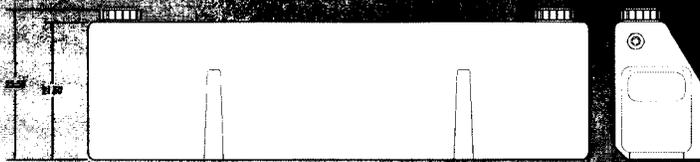

HWT100

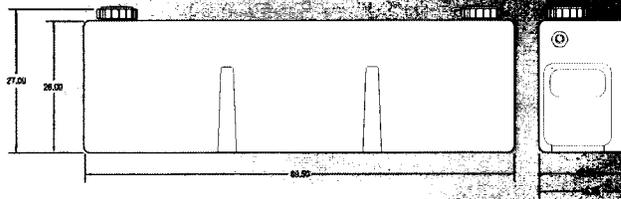

Ordering Information

Code	Description
HWT100	Tailgate 100 Gallon
HWV075	V-Box Single 75 Gallon
HWV100	V-Box Single 100 Gallon
HWV150	V-Box Twin 75 Gallon
HWV200	V-Box Twin 100 Gallon

Code	Description
ME	Electrical Manual
CLH	Hydraulic Closed Loop
HSL	

Hi-Way **NEW LEADER**
Highway Equipment Company
Building the best since 1959.

Highway Equipment Company
1330 76th Ave. SW • Cedar Rapids, IA 52404-7052
Phone: (319) 363-8281 or (800) 363-1771
Fax: (319) 286-3351 or (800) 363-8267
Online: www.highwayequipment.com
E-mail: information@highwayequipment.com

Products and specifications subject to change without notice. Photos and illustrations may or may not include optional equipment. Hi-Way® is a registered trademark of Highway Equipment Company. Copyright 2011 Highway Equipment Company, Inc. Form No. H1138-2011-12

HI-WAY LIMITED WARRANTY

BASIC WARRANTY

HIGHWAY EQUIPMENT COMPANY ("Highway") has manufactured or is distributing the Product/Genuine Parts to which this warranty is attached, and warrants to its original reseller including Dealers, Distributors and Original Equipment Manufacturers (hereafter called Dealer) that the Product/Genuine Parts will, under normal conditions of use and service, be free from material defects due to faulty manufacturing for a period of six (6) months from the date of delivery to the original user. For any Product/Genuine Part that does not conform to the aforesaid warranty within six (6) months from the date of delivery to the original user, your Dealer will, at its option, repair or replace parts. Labor costs for this basic warranty coverage will be paid by Highway to the Dealer at their standard shop rate, based on the amount of time Highway establishes to be the time reasonably necessary to make required repairs. If the Product/Genuine Part is defective in materials or workmanship, you must promptly notify your Dealer, and complete the warranty registration by utilizing the internet at <http://dealer.highwayequipment.com> for such Product before the expiration of the warranty period (Genuine Parts do not require a warranty registration but may require proof of purchase). If your Dealer determines that the defect is due to Highway's material or workmanship, your Dealer will, with Highway's consent, repair such defect during normal working hours, at their location, or such other location as the Dealer may designate. The installation of any part that did not originate from Highway will void this Basic Warranty in its entirety. In the event of repair or replacement, the warranty period shall not be extended beyond the original warranty period.

EXTENDED WARRANTY

In lieu of the basic warranty described above, if the warranty registration (or warranty information as provided above) is received at Highway within thirty (30) days after the date of delivery to the original user, Highway will warrant that the Product will, under normal conditions of use and service, be free from material defects due to faulty manufacturing for a period of thirteen (13) months from the date of delivery to the original user. For any Product that does not conform to the aforesaid warranty within thirteen (13) months from the date of delivery, your Dealer will, at its option, send you a new part, or give you full credit for the part, provided the replacement part is purchased through your Dealer. Labor costs for this extended warranty coverage will be paid by Highway to the Dealer at their standard shop rate, based on the amount of time Highway establishes to be the time reasonably necessary to make required repairs. If the Product is defective in materials or workmanship, you must promptly notify your Dealer before the expiration of the warranty period. If your Dealer determines that the defect is due to Highway's material or workmanship, your Dealer will, with Highway's consent, repair such defect during normal working hours, at their location, or such other location as your Dealer may designate. In the event of repair or replacement, the warranty period shall not be extended beyond the original warranty period.

Genuine Parts are covered by the Basic Warranty and are not eligible for the Extended Warranty.

If you fail to complete the warranty registration (or warranty information as provided above) to Highway within thirty (30) days after the date of delivery, this extended warranty shall not apply, and your sole remedy for any defects in the Product shall be under the basic warranty described above.

The above warranties do not cover:

- (1) Product that is damaged by abuse, neglect, accident, or modification;
- (2) fluids, towing, telephone, travel and cleaning cost;
- (3) loss of use of vehicle, inconvenience, commercial loss, or consequential damages;
- (4) any product, component, or part not manufactured by Highway; or
- (5) the Product itself if parts are installed on the Product that did not originate from Highway.

The above warranties do not apply under the following conditions:

- (1) when Product has been improperly used or installed, or modified, or fitted with sideboards, or fails because of defects or inefficiency of components not furnished with the Product;
- (2) when Product is used for purposes for which it was not originally designed or intended;
- (3) when Product is used under abnormal operating conditions; or
- (4) when the dealer or user fails to follow Highway instructions regarding the Product, including the instruction to install only Highway-supplied parts onto the Product.

HIGHWAY WILL BEAR NO OTHER EXPENSE, INCLUDING BUT NOT LIMITED TO LABOR AND MATERIAL COSTS (OTHER THAN THOSE SPECIFIED HEREIN) OF ANY KIND, AND YOUR EXCLUSIVE REMEDY, IN LIEU OF ALL INCIDENTAL, SPECIAL, CONSEQUENTIAL OR ANY OTHER DAMAGES, INCLUDING, BUT NOT LIMITED TO, DAMAGES FOR NEGLIGENCE, IS LIMITED TO REPAIR OR REPLACEMENT AS HERETOFORE DESCRIBED. THE FOREGOING WARRANTIES ARE IN LIEU OF ALL OTHER REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED OF ANY KIND REGARDING ANY PRODUCT, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE OR USE. IN NO CASE SHALL HIGHWAY BE LIABLE FOR ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES BASED UPON BREACH OF WARRANTY, BREACH OF CONTRACT, NEGLIGENCE, STRICT TORT, OR ANY OTHER LEGAL THEORY.

Unless modified in writing, signed by both parties, this Limited Warranty is understood to be the complete and exclusive agreement between the parties, superseding all prior agreements, oral or written, and all other communications between the parties relating to the subject matter of this Limited Warranty. No representative or agent of Highway nor any third party has authority to change or modify this warranty in any respect, nor to assume any other obligation or liability on behalf of Highway. Any action for breach of warranty must be commenced within six (6) months following the expiration of the Limited Warranty.

These warranties are extended only to the original Dealer and are not transferable. In the event of a warranty claim, you should promptly notify your Dealer, and provide the following:

1. Model and serial number of the Product;
2. Date of delivery to the original user;
3. Part number of the defective part;
4. Description of the difficulty encountered;
5. Date of repair.

Highway will work with your Dealer regarding instructions for repair, replacement, or refund, if the warranty claim can be validated.

Effective with Product delivered to original user on or after September 20, 2010.

SARPY COUNTY, NEBRASKA

REQUEST FOR PROPOSALS

Two (2) Stainless Steel Material Spreaders For the Public Works Department

**PROPOSALS DUE:
2:00 p.m., Thursday, June 19, 2014**

General Information

Notice to Vendors

Sarpy County is seeking proposals for Two (2) Stainless Steel Material Spreaders for the Public Works Department. The successful Vendor will enter into a Contract that incorporates both the RFP along with the submitted proposal for a period of years commencing with .

Sealed bids will be received Monday through Friday 8:00 a.m. to 4:45 p.m. except holidays, until 2:00 p.m., Thursday, June 19, 2014. Bids shall be in a sealed envelope, clearly marked "Sealed Bid – Two (2) Stainless Steel Material Spreaders" and shall have the name of the Vendor, and the time and date of the bid opening. **Do not fax bids, only sealed bids will be accepted.**

Submit one (1) original, four (4) copies and an electronic copy of the completed proposal.

Requests for information and clarification questions must be received by 12:00 p.m., June 12, 2014 at 12:00 P.M. in order for Sarpy County to have time to issue an addendum.

Bidding criteria must be received from Beth Garber, Purchaser, 1210 Golden Gate Drive Suite 1220, Papillion, NE 68046, (402) 593-4476, bgarber@sarpy.com or via the internet at www.sarpy.com.

Vendors that obtain specifications from the internet sites are responsible for obtaining any addenda that may be added at a later time.

Bids must be sent to:

Deb Houghtaling
Sarpy County Clerk's Office
1210 Golden Gate Drive Suite 1250
Papillion, NE 68046

Bids not addressed and delivered to the above person will not be considered. Bids received after the above stated time and date will not be considered.

Bid opening will be a public opening to be held in the Sarpy County Administrative Conference Room at 1210 Golden Gate Drive, Papillion, NE. The bid opening will be at 2:00 p.m., Thursday, June 19, 2014.

All bids submitted shall be valid for a period of ninety (90) days following the final date for submission of bids.

Sarpy County will not be liable for costs incurred by Vendors for proposal preparation, printing, demonstration, or any other costs associated with or incurred in reliance on proposal creation. All such costs shall be the responsibility of the Vendor.

The bids shall include all charges and applicable taxes, F.O.B. Destination, freight prepaid, Sarpy County, Nebraska. The Vendor need not include sales tax in the bid. Sarpy County will, upon request, furnish

the successful Vendor with a completed State of Nebraska Tax Exempt Form 13 upon acceptance of the successful Vendor's proposal.

The Sarpy County Board of Commissioners reserves the right to reject any or all bids and to waive minor informalities.

In the event of conflict between unit price and extended price, unit price shall prevail.

Procedures for Evaluation and Awarding of Bid

Evaluation will be done by Beth Garber, Sarpy County Purchaser along with personnel from the Public Works Department. After evaluation the Purchaser will make a recommendation to the County Board of Commissioners for award. This recommendation and pending award will be made at a public meeting of the Board of Commissioners. Agendas are available each Friday afternoon on our internet site www.sarpy.com. The Commissioners award the bid by majority vote.

The following factors will be used to consider the award of the bid, where applicable:

- a) Compliance with all requirements.
- b) Price.
- c) The ability, capability, and skills of the Vendor to perform.
- d) The character, integrity, reputation, judgment, experience, and efficiency of the Vendor.
- e) The quality of previous performance.
- f) Whether the Vendor can perform within the time specified.
- g) The previous and existing compliance of the supplier with laws.
- h) The life-cost of the personal property or services in relation to the purchase price and specified use.
- i) The performance of the personal property or service taking into consideration any commonly accepted tests and standards of product, service, usability and user requirements.
- j) The energy efficiency ratio as stated by the supplier.
- k) The life-cycle costs between alternatives for all classes of equipment, the evidence of expected life, the repair and maintenance costs, and the energy consumption on a per year basis.
- l) Such other information as may be secured having a bearing on the decision.

Terms and Conditions

1. Information, Discussion, and Disclosures

Any information provided by Sarpy County to any Vendor prior to the release of this Request for Proposal ("RFP"), verbally or in writing, is considered preliminary and is not binding on Sarpy County.

The Vendor must not make available nor discuss any cost information contained in the sealed copy of the proposal to or with any employee of Sarpy County from the date of issuance of this

RFP until the contract award has been announced, unless allowed by the Sarpy County Purchasing Department in writing for the purpose of clarification or evaluation.

No interpretation of the meaning of the specifications, or other bidding documents, or correction of any ambiguity, inconsistency, or error therein will be made orally to any Vendor.

Every request for such interpretation or correction should be in writing, addressed to the Sarpy County Purchaser, Beth Garber, 1210 Golden Gate Drive Suite 1220, Papillion, NE 68046 or bgarber@sarpy.com. **Requests must be received by 12:00 p.m., June 12, 2014 in order for Sarpy County to have time to issue an addendum. Requests received after deadline may not be considered.** In case Sarpy County finds it expedient to supplement, modify, or interpret any portion of the bidding documents prior to the proposed bid date, such procedure will be accomplished by the issuance of written addenda to the RFP which will be mailed or delivered to all prospective Vendors at the respective addresses furnished for such purpose.

2. Addenda

All addenda will become part of this RFP and must be responded to by each Vendor.

All addenda must be acknowledged in writing in the bid submitted by the Vendor.

This RFP, any subsequent addenda, and any written responses to questions take precedence over any information previously provided.

3. Confidentiality of Documents

Sarpy County considers all information, documentation and other materials requested to be submitted in response to this proposal to be of a non-confidential and/or non-proprietary nature and therefore shall be subject to public disclosure under Neb. Rev. Stat. § 84-712.05(3).

Vendors are hereby notified that Sarpy County strictly adheres to all statutes, court decisions, and opinions of the Nebraska Attorney General with respect to disclosure of RFP information.

Any "proprietary, trade secret, or confidential commercial or financial" information must be clearly identified, in a separate sealed envelope, at the time of bid/proposal submission. **Pricing information is not considered financial information and therefore is not considered Confidential.** Please note: even if Vendor believes pricing information is confidential and includes it in a separate, sealed envelope, such information will be read aloud and entered into record during the public bid opening. For all other appropriately identified proprietary, trade secret, or confidential commercial or financial information, the Vendor will be required to fully defend, in all forums, Sarpy County's refusal to produce such information; otherwise, Sarpy County will make such information public upon request.

4. Non-Discrimination Clause

Pursuant to Neb. Rev. Stat. §73-102 (Reissue 2009), Vendor declares, promises, and warrants it has and will continue to comply fully with Title VI of the Civil Rights Act of 1964, as amended (42 U.S.C.A. §1985, et seq.), and the Nebraska Fair Employment Practice Act, Neb. Rev. Stat. §48-1101, et seq. (Reissue 2010), in that there shall be no discrimination against any employee who is employed in the performance of this Contract, or against any applicant for such employment, because of age, color, national origin, race, religion, creed, disability or sex.

5. Conflict of Interest Clause

Pursuant to Neb Rev. Stat. §23-3113 (Reissue 2012), the parties hereto declare and affirm that no officer, member, or employee of the County, and no member of its governing body, and no other public official of the County who exercises any functions or responsibilities in the review or approval of the undertaking described in this Contract, or the performing of services pursuant to this Contract, shall participate in any decision relating to this Contract which affects his or her personal interest, or any corporation, partnership, or association in which he or she is directly or indirectly interested; nor shall any employee of the County, nor any member of its governing body, have any interest, direct or indirect, in this Contract or the proceeds thereof.

6. Payment Terms

The successful Vendor shall submit an itemized invoice for payment. Sarpy County will make payment to the successful Vendor within thirty (30) days after receipt of invoice and satisfactory delivery.

7. Supplemental Terms and Conditions/Modifications

Any supplemental terms, conditions, modifications, or waiver of these terms and conditions must be in writing and signed by the Sarpy County Board Chairman and the Vendor.

8. Termination

Either party may terminate the Contract with ninety (90) days' written notice to the other.

9. Residency Verification

The Vendor agrees to comply with the residency verification requirements of Neb. Rev. Stat. §4-108 through §4-114. The Vendor is required and hereby agrees to use a federal immigration verification system to determine the work eligibility status of new employees physically performing services within the State of Nebraska. A federal immigration verification system means the electronic verification of the work authorization program authorized by the Illegal Immigration Reform and Immigrant Responsibility Act of 1996, 8 U.S.C. 1324a, known as the E-Verify Program, or an equivalent federal program designated by the United States Department of Homeland Security or other federal agency authorized to verify the work eligibility status of a

newly hired employee.

If the Vendor is an individual or sole proprietorship, the following applies:

The Vendor must complete the United States Citizenship Attestation Form, available on the Department of Administrative Services website at www.das.state.ne.us.

- a) If the Vendor indicates on such attestation form that he or she is a qualified alien, the Vendor agrees to provide the U.S. Citizenship and Immigration Services documentation required to verify the Vendor's lawful presence in the United States using the Systematic Alien Verification for Entitlements (SAVE) Program.
- b) The Vendor understands and agrees that lawful presence in the United States is required and the Vendor may be disqualified or the contract terminated if such lawful presence cannot be verified as required by Neb. Rev. Stat. Sect. 4-108.

10. Breach

Should Vendor breach, violate, or abrogate any term, condition, clause or provision of this agreement, the County shall notify Vendor in writing that such an action has occurred. If satisfactory provision does not occur within ten (10) days from such written notice the County may, at its option, terminate this agreement and obtain an alternate provider to provide all required materials. This provision shall not preclude the pursuit of other remedies for breach of contract as allowed by law.

11. Assignment

The Vendor may not assign this Contract without the prior written consent of the County.

12. Subcontracting

Vendor may not subcontract the work to be performed, without prior written consent of the County. If such consent is granted, Vendor will retain responsibility for all work associated with the Contract. The Vendor must identify any subcontractors it intends to use in the execution of this Contract. The Vendor must identify subcontractors in writing within the proposal.

13. Independent Contractor

The Vendor shall in the performance of the Contract at all times be an independent contractor and not an employee or agent of the County. The Vendor, its officers, employees and agents shall at no time represent the Vendor to be other than an independent contractor or represent themselves to be other than employees of the Vendor.

14. Indemnity

The Vendor shall indemnify and save harmless Sarpy County, its officers, employees and agents from all loss, claims, suits or actions of every kind and character made upon or brought against Sarpy County, its officers, employees, or agents, for or sustained by any party or parties as a result of any act, error, omission or negligence of said Vendor or its servants, agents, and subcontractors; and also from all claims of damage in fulfilling this Contract.

15. Deviations

Once the bid has been accepted by Sarpy County, no deviations from the specifications will be accepted without prior written approval of Sarpy County.

16. Exceptions

These specifications are minimum acceptable specifications. You may bid other than what is specified if it is of higher specification than what is requested. Vendor must list any exceptions to the bid specifications on the bid form.

17. Literature

Vendor shall attach one (1) sets of detailed specifications or advertising literature of systems to the bid form. Any information necessary to show compliance with these requirements not given on the attached advertised data sheets shall be supplied in writing and attached to the bid proposal. Lack of sufficient information supplied with a proposal is cause for automatic rejection of such bid.

18. Warranty

A copy of all manufacturer's warranties shall be included in Vendor's proposal.

The Vendor shall warrant all materials, workmanship and equipment against defects for a period of one year beginning on the date of substantial completion except that certain equipment shall be warranted for longer periods as described in manufacturer's warranties.

19. Company Information

Vendor will provide the following company information on the bid form:

- a. Years in business;
- b. Number of employees; and,
- c. Total sales for last three (3) years.

20. References

Each Vendor must include with its proposal a list of no less than three (3) current references that have purchased the specified product or service within the last two (2) years. The list must include the name of the company along with the name, phone number, and email of a contact person for each company.

21. Delivery

Vendor shall provide delivery time frame to Sarpy County with the bid.

YES/NO

A. Hopper Body: *E 2020 XT 13' 4109*

X /

*15" Ext. Sides
10 Gauge Stakes
10 Gauge Sides*

The body shall be all welded with a minimum of twelve (12) gauge, 409 stainless steel construction and not less than eleven (11) cubic yards struck capacity. The body sides of the hopper shall have not less than a forty-five (45) degree pitch for easy flow of material to conveyor belt. Sides and ends to be minimum twelve (12) gauge 409 stainless steel. The hopper front and rear with end gate shall be tapered with a minimum of twenty-three (23) degrees to relieve pressure on the conveyor. There shall be a minimum of six (6) upright supports on the hopper made from ten (10) gauge 409 stainless steel. The upright support shall be braced and tied in with sills to provide the highest degree of resistance to warping or twisting under heavy loads. The body sills shall be a minimum of ten (10) gauge, 409 stainless steel with longitudinal flanges on a minimum of 3" x 1-1/2" seven (7) gauge 304 structural stainless steel cross sills. The body shall be provided with four (4) lifting hooks, one (1) at each corner of the body. All necessary hardware shall be made of 304 stainless steel. If necessary, a hopper extension may be used to provide eleven (11) cubic yard water level capacity.

B. Conveyor:

A /

#5 Belt

The conveyor system shall be of the straight belt type running longitudinally with the body, feeding material to the distributor disc. The overall width shall be approximately twenty-four inches (24"). The conveyor belt shall be rubber covered pre-stretched tempered nylon cord. Belt over chain or chain with ladders will NOT be accepted. The conveyor drive and all idler pulleys shall be self-cleaning. The drive shaft bearings shall not be bolted to the longitudinal sill, but shall be held into position by heavy duty bearing retainers. The retainers shall allow for ease in replacement of bearing without disassembling the

YES/NO

Extended Grease & Ad Adjustments

conveyor belt. All bearings shall be capable of being lubricated. Front bearings shall be lubricated from the back of the sander by extended grease zerk hoses. Belt drive assembly in the front shall be fully adjustable by extended idle control rods mounted at the back of the sander. The idler bearings shall be of an actual ~~Call for~~ design fixture with a positive adjustment, screw type with at least four inches (4") of travel for proper tension at all times. Drive drum assembly shall be made of stainless steel. Rubber covered drums are NOT ACCEPTABLE Replaceable and removable twelve (12) gauge stainless steel conveyor belt shields in conjunction with conveyor bottom edge shall form a labyrinth seal. Belt type edge sealers are NOT acceptable. Conveyor bottom shall be made of stainless steel and of the slatted design type. Conveyor System shall have a feedback sensor installed that is compatible with Force America SSC6100 CAN BUS Spreader Control Hydraulic System.

TAKE-UP DESIGN

Specify Belt Type: Straight Belt

Conveyor Gearbox:

* Sensor Motor Specify Please Weather Pack or M12

State Type: SPUR GEAR Drive

Reduction: 6:1

C Discharge Gate:

304 SS FEEDGATE 304 SS Hardware

X /

An adjustable discharge gate of the screw jack type shall be located at the rear body to properly adjust the flow of material to the spinner. Maximum feed gate opening shall be approximately twelve inches (12") high and eighteen inches (18") wide. Heavy duty, replaceable, ~~Call for~~ shall be made of 304 stainless steel feed gate slides will reinforce the gate opening. All necessary hardware shall be made of 304 stainless steel. To provide accurate calibration of the material flow, a feed gate indicator and ruler shall be provided.

Disc Spins Clockwise

D. Distributor Spinner Assembly: Top Mounted/ Direct Drive

 /
304 Disc (SS)
Top Mount Direct Drive

The spreading disc shall be made of stainless steel twenty inches (20") in diameter. It shall have six (6) equally spaced vanes bolted on to the distributor disc for easy replacement. The hydraulic motor will be directly coupled to the distributor disc with the hydraulic motor mounted to the outside of the chute. The distributor disc shall rotate **counter clockwise** as viewed from the top or hydraulic motor side. Distributor disc assembly shall be designed to obtain a controlled spread. Material shall be guided from conveyor end to distributor

YES/NO

disc by means of adjustable material flow deflectors through a fully enclosed adjustable chute.

Specify: TOP Mount Direct Drive

F. Baffles:

X / To control direction and width of spread, four (4) baffle sections installed over the right, left, rear and front of spinners are required. These baffles shall be equipped with flexible rubber shields at each corner. The shields will be designed to prevent material from exiting the corners of the spinner and striking the underside of the truck or trailing vehicle. Baffle sections made of 12 gauge 409 stainless steel shall be easily adjusted without use of tools from full down to horizontal position.

G. Diverter Chute:

X / A deflector baffle made of stainless steel shall be provided in an enclosed distributor spinner hopper assembly, so it can be positioned in such a manner that material can be unloaded from the Spreader without striking the spinners.

Specify: Spinner Hopper Includes Diverter CHUTE

H. Inverted "V":

X / A height adjustable twelve (12) gauge 304 stainless steel inverted ~~recessed~~ steel shield supported from a minimum of two vertical positions shall be provided to reduce the load on the conveyor. This ~~recess~~ shall be designed to allow a swing motion to eliminate material bridging while protecting the conveyor from excessive load pressure.

Inverted
"V"
304SS

I. Cab Shield:

X / Cab Shield shall be designed to protect the cab and front area of dump body from falling material. It shall be of a slope down design so that material landing on it will fall into the hopper as the spreader unloads. The cab shield shall be constructed of a minimum of twelve (12) gauge 409 stainless steel.

CAB Shield

YES/NO

J Screens:

Hinged
Screens

X/

Screens shall be of the heaviest steel used by the manufacturer. The screen sections are to have 3/8" diameter rod welded to a 1/4" x 2" angle frame forming 2-3/8" x 2-1/2" openings. Sectional screens with a maximum length per section of six (6) feet. They shall be hinged to a 6" X 9.0 LB I beam running longitudinally the full length of the spreader hopper. At the outer edge of the screens, along the side sheets of the body, the screens shall nest into the body. This nesting will lock the screens from movement.

2.5" x
2.5"
openings

K Main Beam Support:

X/

The 6" X 9.0 LB I beam running longitudinally the full length of the spreader hopper shall have two added support braces installed on the underside of the beam. The braces shall be made of (4"x 1/4) flat bar 409 stainless steel and bolted into place with stainless steel bolts. See attached picture.

L Spreader Construction:

X/

Entire Spreader shall be constructed of 409 stainless steel or equivalent.

Specify type of Stainless Steel: 409 Stainless Steel

Specify any parts other than conveyor belt, hydraulic motors, and hoses that are not stainless steel.

1. Hinged Screens - Carbon Steel

2. TAILGATE Latching Device - Carbon Steel

3. _____

M. Power Drive:

X/

It shall be a hydraulic type with two (2) hydraulic motors, one powering the spinner and one the conveyor. Motors shall be of the highest quality on the

YES/NO

market. The conveyor hydraulic motor shall be of the orbital, low speed, hi torque type, integrally mounted to the conveyor gearbox.

Specify: _____

N. Hydraulic System & Controls:

X / _____

Hydraulic System & Controls that are installed on trucks are the dual type electric control permitting independent spinner and conveyor speed control with ground speed sensing. The hydraulic system and controls have three modes of operation: manual, open loop (ground speed only) and closed loop (ground speed with auger/conveyor feedback). Feedback sensor shall be supplied and installed on the conveyor system that is compatible with controls mounted in the truck. The current hydraulic system used by Sarpy County is a Force America SSC6100 CAN BUS Spreader Control Hydraulic System with load sensing piston type displacement pump.

The hoses, couplers and Spreader control wiring will be installed at the rear of the truck. **Vendor shall inspect dump body, controls and truck hydraulics to ensure spreader compatibility.**

O. Hydraulic Quick Disconnect Couplers:

X / _____

These are required for ease in hooking to hydraulic system and will be provided by Vendor. Quick Couplers to be Aeroquip 5600 series, three quarter inch (3/4") (12-12) for spinner and conveyor belt, one inch (1") (16-16) for return line. (See Attachment "A" for details).

P. Pre-Wet System:

X / _____

V-Box dump body mounting pre-wet system with two (2) seventy-five (75) gallon molded polyethylene tanks are required. Tanks shall have two (2) five inch (5") fill inlets with vented caps. Tanks shall be baffled with two (2) 1 1/4" outlet ports. Pre-Wet pump shall be driven by the exhaust oil from the Spreader conveyor drive motor. Spinner drive motor exhaust oil must be tied into the return line after the pre-wet pump to prevent the pump from running when the spinner is on. The Pre-wet pump shall have a minimum capacity of 7 GPM. Pump assembly and control components shall be mounted in a weather tight enclosure.

Enclosure shall be constructed from corrosion-resistant material. All plumbing components shall be black, glass reinforced polypropylene with black EPDM hose

YES/NO

rated at 150 PSI. Pre-wet system shall incorporate in-line check valves, shut-off valves, in-line screen strainer, and low level indicator light. All mounting plates and hardware will be made of 409 stainless steel. All components shall be corrosion-resistant throughout. Minimum of three (3) variable displacement spray orifices shall be provided. Pre-wet system shall be controlled by electronic controls provided by Sarpy County. **Vendor shall inspect dump body, controls and truck hydraulics to ensure spreader pre-wet system compatibility.**

Q. Paint:

X / _____

Prior to assembly of the unit, all components are to be individual cleaned with iron phosphate treatment. Standard factory yellow with one (1) coat of rust proof primer and two (2) coats of yellow multi-component urethane paint is required. Paint and Primer shall be of the highest quality available.

*Plural - Component
EROxy Primer*

R. Lights:

X / _____

Clearance lights and reflectors shall be provided as required for Spreader to comply with DOT FMVSS 108. All wiring connections shall be soldered and cover with heat shrink. Clearance lights shall be 2-1/2" diameter, sealed type mounted in rubber grommets. Stainless steel brackets for lights shall be mounted on the top back left corner, top center back of sander, top back right corner. Light plugs shall be supplied by Vendor. Truck female plug shall be Balkamp # 755-5019, Boot for female side Balkamp # BK7555002, Sander male plug shall be Balkamp # 755-5025 or equal. All wires for spreader shall run through this plug.

S. Working Light:

X / _____

One work light shall be installed on the driver side rear chute pointing down at a 45 degree angle to illuminate the material that is being spread. The work light shall be wired to operate with the clearance lights of truck. The work light shall be an ECCO E92006 Series 9 LED 1800 lumens or equal.

T. Mounting:

X / _____

Spreader mounting to include two (2) heavy duty ratchet type turn buckles with hooks for the front. The front sander mounts will be install by the body builder. The tubes will be placed on the back side of the upper inside stiffener of the front panel. The front panel shall have sander mounting tubes welded to the bottom side of stiffener. Tubes shall be placed 25" in from the inside edge of the

YES/NO

dump box. The tube diameter shall be 2" outside diameter with 3/8 wall x 3" long. A U brace shall be bolted to the front of the spreader frame. The U brace shall be constructed of three inch (3") stainless channel and formed around the dump body doghouse. The rear sander mount shall be a stainless beam at the rear of Spreader that is held by end gate latches and welded to spreader sills. All brackets shall be heavy duty type and securely fastened to spreader and dump body latches. Four (4) heavy duty adjustable knee braces shall be installed. The knee braces shall be constructed of three inch (3") stainless channel iron with a shoe and extend from the spreader support to within one inch (1") of the dump body. The knee braces shall be positioned eighteen inches (18") up from the floor of the dump body. Spreader shall be mounted and ready for service by Vendor. All connections to electrical and hydraulic systems shall be quick disconnect type. The successful Vendor will coordinate with Sarpy County Fleet Services Department prior to mounting for further mounting details and coupling type.

U. Rubber Side Flaps:

X / Rubber side flaps shall be installed along the top rail of Spreader body. The flaps shall run from the front of the sander to the back. The rubber flaps shall be bolted down with stainless steel bolts and washers spaced out every twelve inches (12"). The grates in the closed position will sit on top of the belting. The belting shall be rubber covered pre-stretched tempered nylon cord. Dimension of belting 18" wide 13'1" Long by 3/8" thick.

V. Operation, Parts and Maintenance Manuals:

X / These manuals shall cover the safe operation, maintenance, and parts listing for the units.

W. Performance of Spreader:

 / X The Spreader shall be capable of spreading salt or abrasive material such as sand, gravel, and crushed rock chips up to 1-1/2" in diameter. The Spreader will be used both for winter ice control and summer work for spreading coarse rock along shoulders, etc. Spreader shall be capable of spreading an even path at any speed.

*NOT Recommended for Anything Larger
Than 1/2"*

EXCEPTIONS/CLARIFICATIONS/COMMENTS

- 1. (W) Not Recommended for Anything Larger than 1/2"
- 2. OPTIONAL DBMT Kit And Tailgate Catching #653^{CO}
- 3. _____
- 4. _____
- 5. _____
- 6. _____
- 7. _____
- 8. _____
- 9. _____
- 10. _____


Attachment "A"

Sarpy County Truck Rear Hydraulic Coupler Configuration for Spreader

Conveyor

Return

Spinner



Female

Male

Male

Couplers: Aeroquip 5600 Series

Conveyor and Spinner Size: $\frac{3}{4}$ " (12-12)

Return Line Size: 1" (16-16)

MAIN BEAM SUPPORT



Sarpy County Purchasing Department

SARPY COUNTY COURTHOUSE
1210 GOLDEN GATE DRIVE SUITE 1220
PAPILLION, NE 68046



Brian Hanson, Purchasing Agent
(402) 593-2349
Debby Peoples, Asst. Purchasing Agent
(402) 593-4164
Beth Garber, Senior Buyer/Contract Administrator
(402) 593-4476
Lois Spethman, Supply Clerk/Purchaser
(402) 593-2102

Addendum #1

Two (2) Stainless Steel Material Spreaders For the Public Works Department

Km

Clarification: General Information, Notice to Vendors should be replaced in full with the following.

General Information

Notice to Vendors

Sarpy County is seeking proposals for Two (2) Stainless Steel Material Spreaders for the Public Works Department.

Sealed bids will be received Monday through Friday 8:00 a.m. to 4:45 p.m. except holidays, until 2:00 p.m., Thursday, June 19, 2014. Bids shall be in a sealed envelope, clearly marked "Sealed Bid – Two (2) Stainless Steel Material Spreaders" and shall have the name of the Vendor, and the time and date of the bid opening. **Do not fax bids, only sealed bids will be accepted.**

Requests for information and clarification questions must be received by 12:00 p.m., June 12, 2014 at 12:00 P.M. in order for Sarpy County to have time to issue an addendum.

Bidding criteria must be received from Beth Garber, Purchaser, 1210 Golden Gate Drive Suite 1220, Papillion, NE 68046, (402) 593-4476, bgarber@sarpy.com or via the internet at www.sarpy.com.

Vendors that obtain specifications from the internet sites are responsible for obtaining any addenda that may be added at a later time.

Bids must be sent to:

Deb Houghtaling
Sarpy County Clerk's Office
1210 Golden Gate Drive Suite 1250
Papillion, NE 68046

Bids not addressed and delivered to the above person will not be considered. Bids received after the above stated time and date will not be considered.

Bid opening will be a public opening to be held in the Sarpy County Administrative Conference Room at 1210 Golden Gate Drive, Papillion, NE. The bid opening will be at 2:00 p.m., Thursday, June 19, 2014.

All bids submitted shall be valid for a period of ninety (90) days following the final date for submission of bids.

Sarpy County will not be liable for costs incurred by Vendors for proposal preparation, printing, demonstration, or any other costs associated with or incurred in reliance on proposal creation. All such costs shall be the responsibility of the Vendor.

The bids shall include all charges and applicable taxes, F.O.B. Destination, freight prepaid, Sarpy County, Nebraska. The Vendor need not include sales tax in the bid. Sarpy County will, upon request, furnish the successful Vendor with a completed State of Nebraska Tax Exempt Form 13 upon acceptance of the successful Vendor's proposal.

The Sarpy County Board of Commissioners reserves the right to reject any or all bids and to waive minor informalities.

In the event of conflict between unit price and extended price, unit price shall prevail.

**All other terms remain unchanged.
Addendum must be acknowledged on the Bid Form.**

Fall Fleet Truck & Equipment

2109 S. 35th St

Channah, 51501



0191011

"1" Scania Pick

Thomas Jun 19th 2014

"2" Stainless Steel Method
Sprayers"

Deb Howard/Talms

Sheriff County's Clerk's Office

1210 Golden Gate Drive Suite
1450

Flagstaff, AZ, 86006