2014-146

14|000613

BOARD OF COUNTY COMMISSIONERS
SARPY COUNTY, NEBRASKA

RESOLUTION APPROVING AND AUTHORIZING CHAIRMAN TO SIGN THE INTERLOCAL COOPERATION ACT AGREEMENT BETWEEN SARPY COUNTY AND SANITARY AND IMPROVEMENT DISTRICT 292 (North Shore) FOR ROAD IMPROVEMENTS TO 120TH AND 126TH STREETS AND CORNHUSKER ROAD

WHEREAS, pursuant to Neb. Rev. Stat. § 23-104 (Reissue 2012), the County has the power to do all acts in relation to the concerns of the County necessary to the exercise of its corporate powers; and,

WHEREAS, pursuant to Neb. Rev. Stat. § 23-103 (Reissue 2012), the powers of the County as a body are exercised by the County Board; and,

WHEREAS, general supervision and control of the public roads of each county is vested in the County Board by virtue of Neb. Rev. Stat. §39-1402 (Reissue 2012); and,

WHEREAS, pursuant to Neb. Rev. Stat. §13-801, *et seq.*, (Reissue 2012), an Interlocal Cooperation Act Agreement has been proposed between Sanitary and Improvement District 292 and Sarpy County for allocation of the cost of certain road improvements to portions of 120th Street, 126th Street, and Cornhusker Road as further outlined in said Agreement; and,

WHEREAS, it is in the best interests of the residents of Sarpy County to participate in said Interlocal Cooperation Agreement, a copy of which is attached hereto and incorporated by reference.

NOW, THEREFORE, BE IT RESOLVED BY THE SARPY COUNTY BOARD OF COMMISSIONERS that this Board hereby approves and adopts the attached Interlocal Cooperation Agreement.

BE IT FURTHER RESOLVED that the Chair and Clerk are hereby authorized to execute said Agreement on behalf of Sarpy County, Nebraska and they in addition to the County Public Works Director (or his designee) are authorized to take such other actions as may be necessary under the terms of said Agreement.

The above Resolution was approved by a vote of the Sarpy County Board of Commissioners at a public meeting duly held in accordance with applicable law on the 22nd day of April, 2014.

Attest:

SEAL

COUNTY CLERK SEAL SARPY COUNTY NEBRASKA

Sarpy County Board Chairman

County Clerk

INTERLOCAL COOPERATION AGREEMENT

(120th Street to 126th Street Between Lincoln and Cornhusker Road and Cornhusker Road Improvements)

This INTERLOCAL COOPERATION AGREEMENT is made and entered into by and between COUNTY OF SARPY, in the State of Nebraska (hereinafter referred to as "County") and SANITARY AND IMPROVEMENT DISTRICT NO. 292 OF SARPY COUNTY, NEBRASKA (hereinafter referred to as "SID 292").

PRELIMINARY STATEMENT

SID 292 is presently undertaking the development of the real property legally described as North Shore which is generally located northwest of 120th Street and Lincoln Road in Sarpy County, Nebraska.

Pursuant to the Interlocal Cooperation Act, Section 23-2201, et seq., the County and SID 292 are authorized to enter into this Agreement with each other so as to make the most efficient use of their powers by enabling them to cooperate on a basis of mutual advantage and thereby provide services and facilities in a manner and pursuant to forms of governmental organization that will accord best with geographic, economic, population and other factors influencing the needs and development of such political subdivisions.

It is in the best interests and would be mutually advantageous to the County and SID 292 to improve at this time, pursuant to this Agreement, those portions of 120th Street, 126th Street and Cornhusker Road shown on the site plan (the "Site Plan") attached hereto as Exhibit "A" and incorporated herein by this reference. Such improvements shall include, without limitation, relocation of utilities, storm sewers and other drainage facilities, paving and related improvements, as more particularly described within the schedule of estimated cost summary from Lamp, Rynearson & Associates, Inc., engineers for SID 292, entitled Total Costs for 120th to 126th Street Between Lincoln and Cornhusker; and Paving Major Cornhusker Road, dated 4/14/2014, copies of which are attached hereto as Exhibit "B" and incorporated herein by this reference, hereinafter referred to as the "Improvements." Said attachments are intended to show only a basic description of the work and the costs presently estimated and may be revised from time to time.

NOW, THEREFORE, in consideration of the covenants herein set forth, the County and SID 292 do hereby agree and contract with each other as follows:

1. No Administrative Entity. There shall be no separate legal or administrative entity created to administer this Agreement and, therefore, no separate budget established for such an entity.

2. Plans and Design. SID 292 has contracted Lamp, Rynearson & Associates, Inc., registered engineers in the State of Nebraska ("Engineers"), for the preparation of plans and specifications for the construction of the Improvements. The final plans and specifications shall be reviewed and approved by each of the parties hereto.

3. Construction. SID 292 agrees to cause the Improvements to be constructed and bid in accordance with the plans and specifications approved by the parties hereto in accordance with Paragraph 2. During the course of the construction of the Improvements, the County and SID 292 may at any time cause inspection of the work to insure compliance with the final plans and specifications.

4. Payment of Costs of Improvements. The estimated costs for the Improvements and proportionate shares of the cost are as shown on the attached Exhibit "B." Excluding the legal, fiscal, and interest costs, County shall (1) pay ½ of the estimated construction, engineering, construction administration and testing costs for the paving of 120th to 126th Street, and (2) pay 1/3 of the estimated construction, engineering, construction administration and testing costs for the paving of Cornhusker Road. Periodic payment for the actual costs of the Improvements shall be made by SID 292. The County shall be billed for its portion of the cost of the Improvements within sixty (60) days after the issuance of the engineering Certificate of Completion.

5. Grading of Cornhusker. SID 292 shall cause the right-of-way of Cornhusker Road to be graded at no cost or expense to the County west of 120th Street as more particularly shown on Exhibit "C" attached hereto and incorporated herein by this reference.

6. Purpose of Agreement; Timing of Work. It is the mutual desire and intention of the parties that the Improvements shall be completed as expeditiously as possible. Accordingly, the parties hereby agree to cooperate with each other and make reasonable, good faith efforts to perform their obligations hereunder in a timely manner so as to achieve completion of all of the Improvements contemplated by this Agreement. No separate legal or administrative entity will be created hereunder. Existing Agents of the respective parties will complete the terms of this contract.

7. Records. SID 292 shall maintain records of all construction costs incurred by SID 292 in connection with the Improvements and the County and SID 292 shall have the right to audit and review such records at any time to assure that such records are accurate.

8. Duration. This Agreement shall continue until such time as the Improvements to be performed by the County pursuant to this Agreement have been completed and paid for, unless this Agreement is terminated sooner by the written agreement of all parties hereto.

9. Appointment of Administrators. The Sarpy County Engineer or his designee shall administer this contract on behalf of the County. Lamp, Rynearson & Associates, Inc. shall administer this contract on behalf of SID 292. The parties hereto agree that the County shall serve as the lead agency for the said Improvements.

10. Maintenance. The maintenance and preservation of all Improvements in the right-of-way of Cornhusker Road shall be that of the County upon completion of the Improvements. The portions of 120th Street and 126th Street through the development shall be maintained by SID 292.

11. Entire Agreement. This instrument contains the entire agreement of the parties and shall be binding upon the successors and assigns of the respective parties. No amendments, deletions, or additions shall be made to this Agreement except in writing signed by all parties. Nebraska law shall govern the terms and performances under this Agreement.

12. Nondiscrimination Clause. In accordance with the Nebraska Fair Employment Practice Act, Neb. Rev. Stat. 48-1122, each party agrees that it nor any of its subcontractors or agents shall discriminate against any employee, or applicant for employment to be employed in the performance of this agreement, with respect to hire, tenure, terms, conditions, or privileges of employment because of the race, color, religion, sex, disability, or national origin of the employee or applicant.

13. Choice of Law. This Agreement shall be governed in all respects by the laws of the State of Nebraska and the venue for any litigation with respect hereto shall be in the courts of Sarpy County, Nebraska.

14. New Employee Work Eligibility Status. The parties agree to comply with the residency verification requirements of Neb. Rev. Stat. §4-108 through §4-114. The parties are required and hereby agree to use a federal immigration verification system to determine the work eligibility status of new employees physically performing services within the State of Nebraska. A federal immigration verification system means the electronic verification of the work authorization program authorized by the Illegal Immigration Reform and immigrant Responsibility Act of 1996, 8 U.S.C. 1324a, known as the E-Verify Program, or an equivalent federal program designated by the United States Department of Homeland Security or other federal agency authorized to verify the work eligibility status of a newly hired employee.

15. Conflict of Interest. The parties warrant to each other that they have not employed nor retained any company or person, other than a bona fide employee working solely for the parties to this Agreement to solicit or secure this contract, and that they have not paid or agreed to pay any company or person other than a bona fide employee working solely for the parties, any fee, commissions, percentage, brokerage fees, gifts or other consideration, contingent upon or resulting from the award or making of this contract.

16. Severability. In the event any portion of this Agreement may be held invalid or unenforceable for any reason, it is agreed that any invalidity or unenforceability shall not affect the remainder of this Agreement and the remaining provisions shall remain in full force and effect, and any court of competent jurisdiction may so modify any objectionable provision of this Agreement so as to render it valid and enforceable.

IN WITNESS WHEREOF, we, the contracting Parties, by our respective duly authorized agents, hereby enter into this Agreement, effective on the day and year affixed hereon. Executed in duplicate on the dates indicated with the signatures below.

Executed by County this 22nd day of April, 2014.

ATTEST:

COUNTY CLERK SEAL SARPY COUNTY NEBRASKA

Renee Lausmann

County Clerk Chief Deputy

THE COUNTY OF SARPY, NEBRASKA

By

Chairman, Sarpy County Board of Commissioners

APPROVED AS TO FORM:

Deputy County Attorney

Approved by SID 292 this 28th day of April, 2014.

ATTEST:

Clerk

SANITARY AND IMPROVEMENT DISTRICT
NO. 292 OF SARPY COUNTY, NEBRASKA

By

Chairman

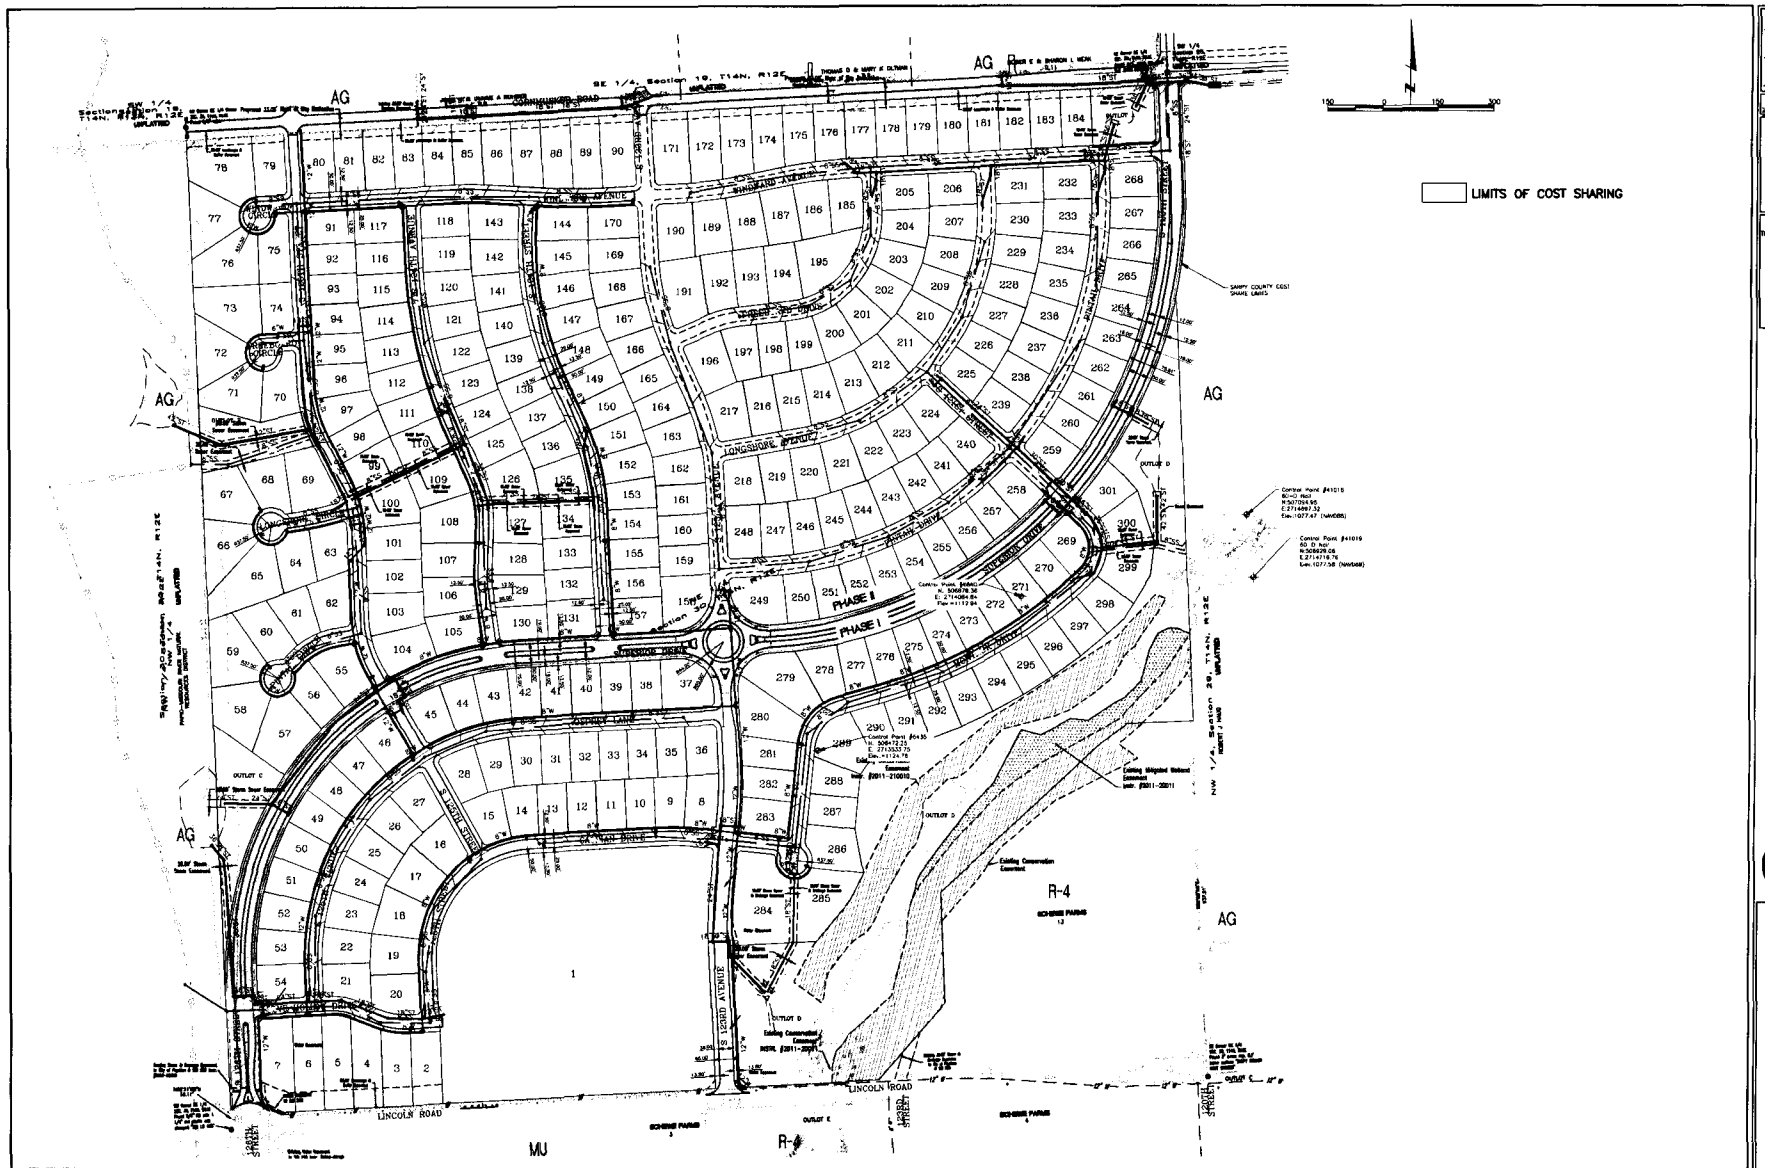

EXHIBIT A

drawn by CJL
designed by CJL
reviewed by KAP

Sarpy County Cost Share

revisions
1 RJK 03-06-2014

This document was originally issued and sealed by CHRISTOPHER J. LANGAN E-11192 on 08-20-2013
This media should not be considered a certified document.

LAMP RYNEARSON & ASSOCIATES
14710 West Dodge Road, Suite 100 402.496.2498 | P
Omaha, Nebraska 68154-2027 402.496.2730 | F
www.LRA-Inc.com

SANITARY AND IMPROVEMENT DISTRICT NO. 292, SARPY COUNTY, NEBRASKA
SANITARY SEWER, STORM SEWER, WATER AND PAVING

SARPY COUNTY
COST SHARE EXHIBIT

job number-tasks 0112044.11-050
book page
date 3/25/2014
sheet 1 of 1

TOTAL COST FOR 120TH TO 126TH STREET BETWEEN LINCOLN AND CORNHUSKER - EXHIBIT B

Assumptions/Comments:

Boulevard includes 120th Street, Superior and 126th Street. 50% Cost Share by Sarpy County.

	Bid Item Description	Approximate Quantity	Unit	Unit Price	Total
	PAVING (Items 1-24 are based on bids)				
1 .	REMOVE TEMPORARY CURB	108	LF	7.42	$801.36
2 .	7" CONCRETE PAVEMENT - TYPE L65	20,311	SY	23.23	$471,824.53
3 .	COMMON EARTH EXCAVATION	6,770	CY	1.94	$13,134.45
4 .	MEDIAN SURFACING	4,255	SF	7.02	$29,870.10
5 .	CONSTRUCT MEDIAN NOSE	10	EA	183.75	$1,837.50
6 .	CONSTRUCT DETECTABLE WARNING	88	SF	21.00	$1,848.00
7 .	ADJUST MANHOLE TO GRADE	7	EA	164.30	$1,150.10
8 .	EXTERNAL FRAME SEAL	7	EA	302.78	$2,119.46
9 .	CONSTRUCT BURIED LUG HEADER	1	EA	105.00	$105.00
10 .	CONCRETE HEADER	25	LF	6.70	$167.50
11 .	CONSTRUCT END OF STREET BARRICADE	1	EA	790.72	$790.72
12 .	REMOVE TEMPORARY INLET BASE	1	EA	100.00	$100.00
13 .	CONSTRUCT CURB INLET - TYPE I	11	EA	1,620.00	$17,820.00
14 .	CONSTRUCT CURB INLET - TYPE III	1	EA	1,920.00	$1,920.00
15 .	BARRICADES - TYPE II	4,000	BD	0.48	$1,920.00
16 .	BARRICADES - TYPE III	700	BD	1.17	$819.00
17 .	TOPSOIL ISLANDS	1,800	CY	9.36	$16,848.00
18 .	SEEDING - TYPE "TEMPORARY SEED MIX"	3	AC	159.00	$477.00
19 .	STRAW MULCH	3	AC	424.00	$1,272.00
20 .	CONSTRUCT SILT FENCE	0	LF	2.65	$0.00
21 .	CLEANOUT SILT FENCE	0	LF	2.10	$0.00
22 .	CLEANOUT SILT BASIN	0	CY	3.00	$0.00
23 .	JET EXISTING SANITARY SEWER	0	LF	0.64	$0.00
24 .	CONSTRUCT MOW STRIP	13,000	SF	8.25	$107,250.00
25 .	PREFORMED PAVEMENT MARKING TAPE MARKING SYMBOL - WHITE DIRECTIONAL ARROW	2	EA	350.00	$700.00
26 .	5" PREFORMED PAVEMENT MARKING TAPE PAVEMENT MARKING - WHITE DOTTED	500	EA	2.00	$1,000.00
27 .	5" PREFORMED PAVEMENT MARKING TAPE PAVEMENT MARKING - WHITE	200	LF	$3.00	$600.00
28 .	6" PREFORMED PAVEMENT MARKING TAPE PAVEMENT MARKING - WHITE	13,965	LF	$3.50	$48,877.50
29 .	PREFORMED PAVEMENT MARKING TAPE MARKING SYMBOL - WHITE BIKE SYMBOL	36	EA	$250.00	$9,000.00
30 .	PREFORMED PAVEMENT MARKING TAPE MARKING SYMBOL - WHITE BIKE ARROW	36	EA	$150.00	$5,400.00
31 .	GRADING AND ROW EASEMENTS	1.00	LS	$17,190.22	$17,190.22
32 .	9" PAVEMENT CHANGE ORDER	20,311.00	SY	$5.43	$110,288.73

PAVING MAJOR CORNHUSKER ROAD EXHIBIT B

Cornhusker Road Paving and Storm Sewer

Assumptions/Comments:

West 1/4-mile of project has already been graded flat in the ROW.

	Bid Item Description	Approximate Quantity	Unit	Unit Price	Total
1 .	CLEARING AND GRUBBING GENERAL	1	LS	$10,000.00	$10,000.00
2 .	CLEARING AND GRUBBING TREES OVER 9" TO 18" DIAMETER	7	EA	$200.00	$1,400.00
3 .	CLEARING AND GRUBBING TREES OVER 18" TO 27" DIAMETER	4	EA	$500.00	$2,000.00
4 .	CLEARING AND GRUBBING TREES OVER 27" TO 36" DIAMETER	2	EA	$800.00	$1,600.00
5 .	REMOVE FENCE	942	LF	$1.00	$942.00
6 .	REMOVE AND REPLACE MAILBOX	2	EA	$200.00	$400.00
7 .	REMOVE AND REPLACE STOP SIGN	1	EA	$200.00	$200.00
8 .	REMOVE CULVERT PIPE OVER 18" TO 24"	88	LF	$15.00	$1,320.00
9	REMOVE FLARED END SECTION (24" TO 36")	1	EA	$250.00	$250.00
10 .	REMOVE PAVEMENT	56	SY	$10.00	$560.00
11	REMOVE SIDEWALK	92	SF	$2.50	$230.00
12 .	SAW CUT - FULL DEPTH	21	LF	$6.00	$126.00
13	REMOVE BARRICADE	1	EA	$400.00	$400.00
14	REMOVE CONCRETE HEADER	25	LF	$6.00	$150.00
15 .	EARTHWORK (EXCAVATION)	13,918	CY	$4.00	$55,672.00
16 .	EARTHWORK (UNSUITABLE EXCAVATION)	1,000	CY	$6.00	$6,000.00
17	EXPLORATORY EXCAVATION	20	HR	$225.00	$4,500.00
18 .	9" CONCRETE PAVEMENT - TYPE L65	682	SY	$35.00	$23,870.00
19	7" CONCRETE PAVEMENT - TYPE L65	7,983	SY	$30.00	$239,490.00
20 .	7" CONCRETE DRIVEWAY - TYPE L65	117	SY	$32.00	$3,744.00
21	CRUSHED ROCK FOR SURFACING	872	TON	$27.00	$23,544.00
22 .	CONCRETE HEADER	199	LF	$7.00	$1,393.00
23 .	CONSTRUCT THICKENED EDGE PAVEMENT	249	LF	$7.00	$1,743.00
24 .	CONSTRUCT 4-STRAND BARBED WIRE FENCE	201	LF	$5.25	$1,055.25
25 .	CONSTRUCT 3' WOVEN WIRE FENCE	731	LF	$9.25	$6,761.75
26	PCC-LINED FLUME	15	LF	$50.00	$750.00
27 .	CONSTRUCT 18" R.C.P., CLASS III	1,140	LF	$32.00	$36,480.00
28 .	CONSTRUCT 24" R.C.P., CLASS III	48	LF	$38.00	$1,824.00
29 .	CONSTRUCT 36" R.C.P., D(0.01) = 1,350	45	LF	$62.00	$2,790.00
30 .	CONSTRUCT CURB INLET - TYPE I	5	EA	$2,500.00	$12,500.00
31 .	CONSTRUCT CURB INLET - TYPE III	5	EA	$2,800.00	$14,000.00
32 .	CONSTRUCT 36" R.C. FLARED END SECTION	1	EA	$900.00	$900.00
33	CONSTRUCT 36" R.C. HORIZONTAL PIPE BEND	1	EA	$2,000.00	$2,000.00
34 .	CONSTRUCT 54" I.D. FLATTOP MANHOLE	14	VF	$600.00	$8,400.00
35	TAP 18" PIPE INTO MANHOLE	1	EA	$500.00	$500.00
36 .	ADJUST MANHOLE TO GRADE	3	EA	$500.00	$1,500.00
37 .	CONSTRUCT 18" PIPE BEDDING	1,140	LF	$7.00	$7,980.00
38 .	CONSTRUCT 24" PIPE BEDDING	48	LF	$8.50	$408.00
39 .	CONSTRUCT 36" PIPE BEDDING	45	LF	$10.00	$450.00
40 .	STABILIZE TRENCH WITH CRUSHED LIMESTONE	100	TN	$30.00	$3,000.00
41 .	CONSTRUCT ROCK RIP-RAP - TYPE "B"	10	TON	$45.00	$450.00
42	CONSTRUCT ROCK RIP-RAP - TYPE "C"	127	TON	$45.00	$5,715.00
43 .	SEEDING - TYPE "B"	4.0	AC	$2,000.00	$8,000.00
44 .	CONSTRUCT SILT FENCE	300	LF	$3.00	$900.00
45 .	ROLLED EROSION CONTROL, TYPE II	18,000	SY	$1.25	$22,500.00
46 .	EROSION CHECKS, WATTLE	400	LF	$4.00	$1,600.00
47 .	PERMANENT PAINTED PAVEMENT MARKING - 5" WHITE SOLID	100	LF	$0.75	$75.00
48 .	PERMANENT PAINTED PAVEMENT MARKING - 5" YELLOW SOLID	5,412	LF	$0.75	$4,059.00
49 .	PERMANENT PAINTED PAVEMENT MARKING - WHITE DIRECTIONAL ARROW	1	EA	$100.00	$100.00
50 .	PERMANENT PAINTED PAVEMENT MARKING - WHITE "ONLY"	1	EA	$100.00	$100.00
51 .	BARRICADE - TYPE II	700	BDAY	$0.75	$525.00
52 .	BARRICADE - TYPE III	1,000	BDAY	$2.00	$2,000.00
53 .	WARNING SIGNS	700	SDAY	$2.00	$1,400.00
54 .	CONSTRUCT AND REMOVE TEMPORARY ROCK ACCESS ROAD	2,000	SY	$5.00	$10,000.00
	CONTINGENCY - 15%				$80,738.55

Estimated Construction Costs: $618,995.55

Estimated Soft Costs

	Engineering, Construction	
21.00%	**Administration and Testing:**	$129,989.07
5.00%	**Legal:**	$37,449.23
6.00%	**Fiscal:**	$47,186.03
7.00%	**Interest:**	$43,765.04
9	**Duration (Months)**	

Total Estimated Soft Costs: 42% $258,389.37

Total Estimated Costs: $877,384.92

Estimated 1/3 Sarpy County Contribution

1/3 Estimated Construction Costs	$206,331.85
1/3 Estimated Design & CA	$43,329.69
Total Estimated Sarpy County Reimbursable	$249,661.54
Estimated 1/3 Future Contribution SID North of Cornhusker	$313,861.69
Estimated 1/3 Contribution North Shore SID General Obligation	$313,861.69

	STORM SEWER (Items 1-10 based on bids)			
1 .	CONSTRUCT 18" R.C.P., CLASS III	285 LF	20.30	$5,785.50
2 .	CONSTRUCT 24" R.C.P., CLASS III	820 LF	26.60	$21,812.00
3 .	CONSTRUCT 36" R.C.P., D(0.01) = 1,350	480 LF	47.30	$22,704.00
4 .	CONSTRUCT 18" PIPE BEDDING	285 LF	3.95	$1,125.75
5 .	CONSTRUCT 24" PIPE BEDDING	820 LF	4.85	$3,977.00
6 .	CONSTRUCT 36" PIPE BEDDING	480 LF	10.90	$5,232.00
7 .	CONSTRUCT 18" R.C. FLARED END SECTION W/BAR GRATE	1 EA	875.00	$875.00
8 .	CONSTRUCT 24" R.C. FLARED END SECTION W/BAR GRATE	1 EA	1,030.00	$1,030.00
9 .	CONSTRUCT 36" R.C. FLARED END SECTION W/BAR GRATE	1 EA	1,480.00	$1,480.00
10 .	CONSTRUCT 54" I.D. MANHOLE (5 EA)	44 VF	336.00	$14,784.00
	SIGNS			
1 .	STREET SIGN WITH SWING PROOF BRACKETS	20 EA	$50.00	$1,000.00
2 .	METAL POSTS WITH TOP CAP	34 EA	$125.00	$4,250.00
3 .	"STOP" SIGN (24")	7 EA	$200.00	$1,400.00
4 .	"YIELD" SIGN (24")	5 EA	$200.00	$1,000.00
5 .	SPEED LIMIT SIGN (18"X24")	2 EA	$175.00	$350.00
6 .	MOVEMENT LEFT TURN ONLY SIGN	1 EA	$100.00	$100.00
7 .	MOVEMENT THRU AND RIGHT SIGN	1 EA	$100.00	$100.00
8 .	LEFT LANE MUST TURN LEFT SIGN	1 EA	$100.00	$100.00
9 .	"KEEP RIGHT" SIGN (18X24")	15 EA	$175.00	$2,625.00
10 .	"ONE WAY" SIGN (12" X 18")	5 EA	$150.00	$750.00
11 .	"TRAFFIC CIRCLE AHEAD" SIGN WITH PLACARD (24" X 24")	4 EA	$250.00	$1,000.00
12 .	END SIGN	6 EA	$100.00	$600.00
13 .	"BIKE LANE" SIGN (30"X24")	12 EA	$150.00	$1,800.00
14 .	"PEDESTRIAN CROSSING" SIGN (30"X30")	10 EA	$250.00	$2,500.00
15 .	REFLECTIVE DELINEATORS	5 EA	$75.00	$375.00
	CONTINGENCY	10%	$961,886.42	$96,188.64

Estimated Construction Costs:		$1,058,075.06
Estimated Soft Costs		
21.00%	**Engineering Design, Testing and Construction Administration:**	$222,195.76
5.00%	**Legal:**	$52,903.75
5.00%	**Fiscal:**	$66,658.73
7.00%	**Interest:**	$73,491.25
9	**Duration (Months)**	
Total Estimated Soft Costs:	39%	$415,249.49
Total Estimated Costs:		$1,473,324.55
Sarpy County Cost Share		
50% Construction Cost		$529,037.53
50% Engineering Geotechnical and Testing		$111,097.88
Total Sarpy County Contribution		$640,135.41

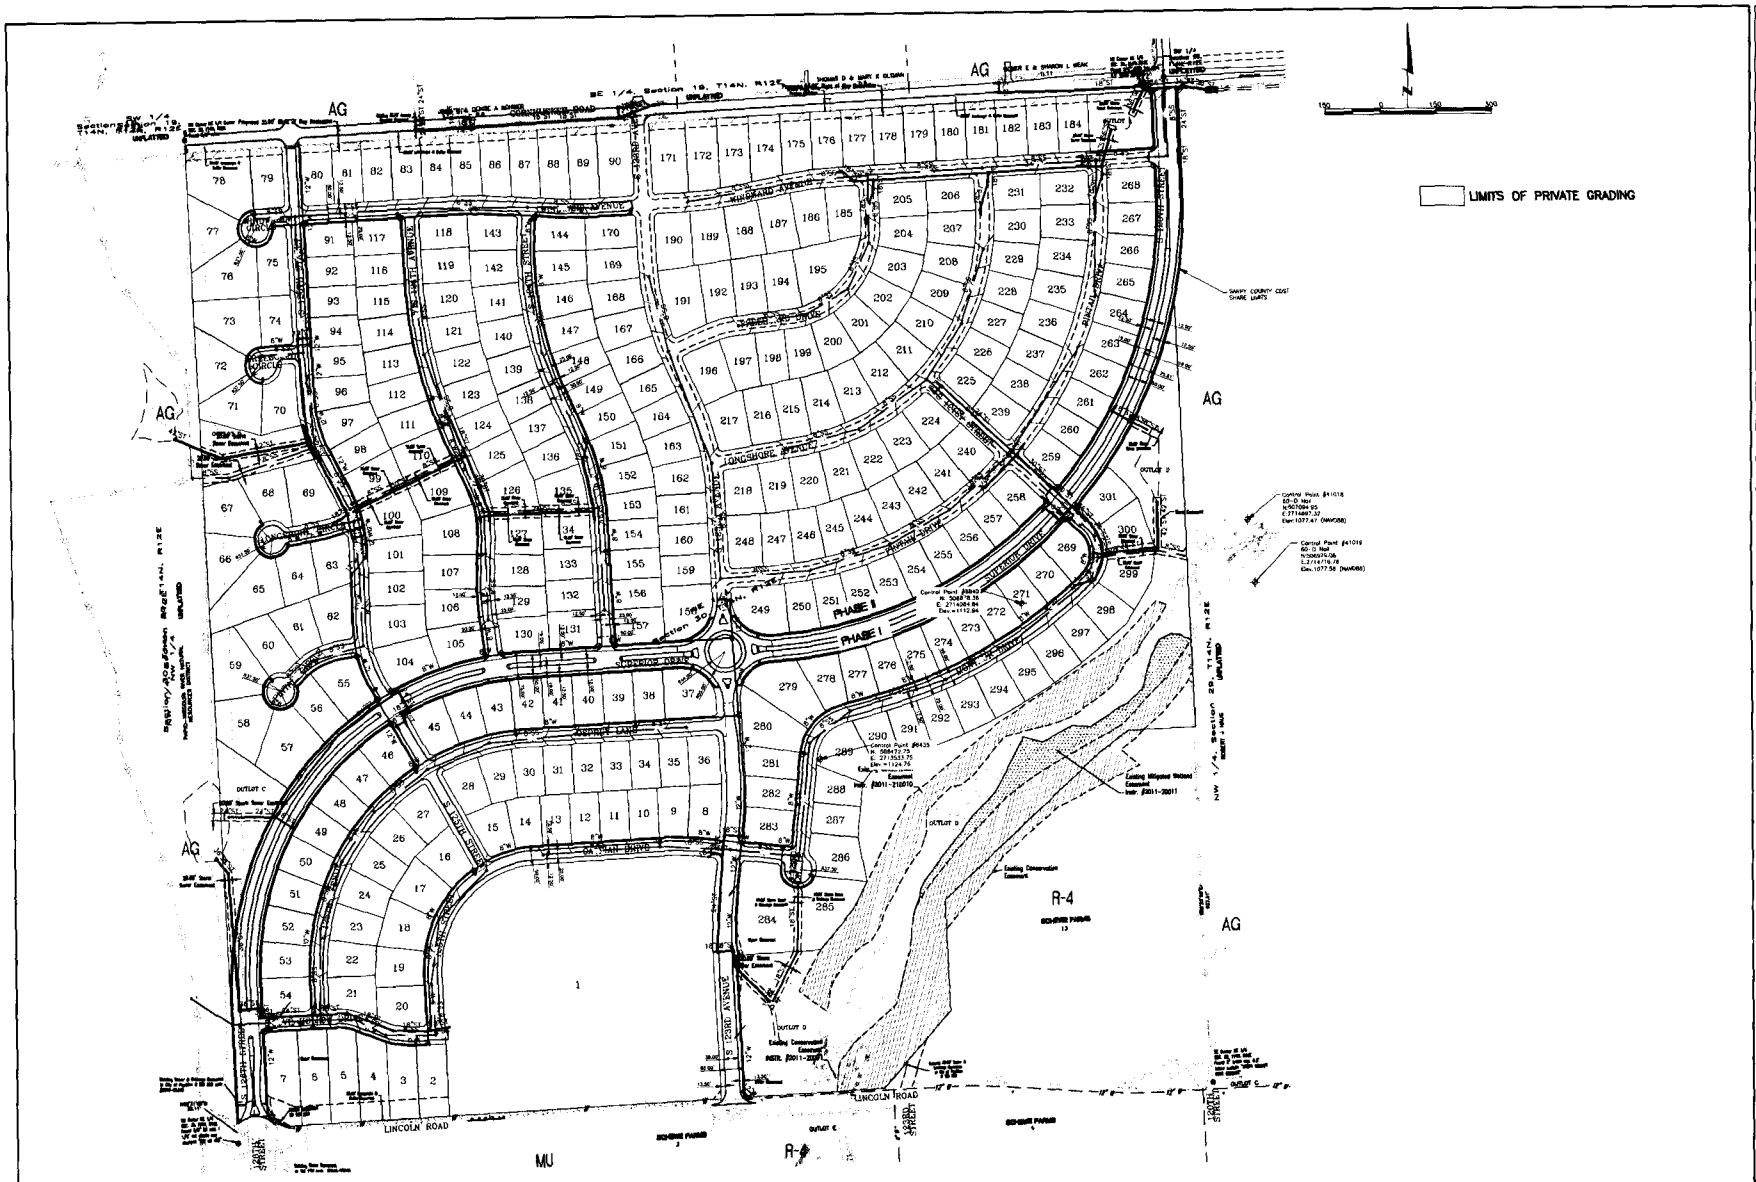

EXHIBIT C

drawn by CJL
designed by CJL
reviewed by KAP
reference
revisions

This document was originally issued and sealed by CHRISTOPHER J. LANCAN E-11192 on 08-20-2013
This media should not be considered a certified document.

LAMP RYNEARSON & ASSOCIATES
14710 West Dodge Road, Suite 100 402.496.2498 | P
Omaha, Nebraska 68154-2027 402.496.2730 | F
www.LRA-Inc.com

SANITARY AND IMPROVEMENT DISTRICT NO. 292, SARPY COUNTY, NEBRASKA
SANITARY SEWER, STORM SEWER, WATER AND PAVING

CORNHUSKER ROAD ROW
GRADING LIMITS

job number-tasks 0112044.11-050
book page
date 3/28/2014
sheet 1 of 1